

RX671 Group

RX671 OTA-supported flat panel HMI PoC with touch keys and LCD

Introduction

This kit for RX671 touch keys and OTA-supported flat panel HMI PoC using LCD (hereinafter referred to as "RX671 PoC") is ideal for the development of IoT devices with HMI using capacitive touch sensors.

This application note introduces the HMI solution using RX671 PoC to realize touch functionality and LCD display with serial connection LCD. In addition, introduce the function to connect to the cloud and perform firmware updates using OTA.

The sample program described in this application note is configured using the following libraries.

- LCD Display : Embedded GUI software emWin (hereinafter referred to as "emWin")

Target Device

RX671 Group

When using this application note with other Renesas MCUs, careful evaluation is recommended after making modifications to comply with the alternate MCU.2

Target Tool

RX671 PoC

For more information on security, please refer to "Renesas MCU Firmware Update Design Policy (R01AN5548)"

Contents

1. Outline.....	4
2. Operation Confirmation Conditions	6
3. Sample Programs	7
3.1 Demonstration Screen Flowchart	7
3.2 Flowchart	10
3.2.1 Overall flowchart of LCD control.....	10
3.2.2 Processing at touch keys operation	11
3.2.3 Processing at touch slider operation	12
3.2.4 Processing when the "home" button is touched.....	13
3.2.5 Processing when the "select" button is touched	14
3.2.6 Processing when the "start" button is touched.....	15
3.2.7 Processing during cooking	16
3.2.8 Overall flowchart of touch control	17
3.2.9 Processing of touch judgement	18
3.2.10 Processing of startup screen display	19
3.2.11 Processing of 5 seconds wait.....	20
3.2.12 Processing of flag clear for touch	21
3.2.13 Processing of screen initialization	22
3.2.14 Processing at moving to the menu screen	23
3.2.15 Processing of setting LED pattern to sleep	24
3.3 Pins Used	25
3.4 Sample Program Structure	26
3.4.1 Peripheral Functions Used	26
3.4.2 Components Used.....	27
3.4.3 Peripheral Function Settings	28
3.4.4 File Structure	34
3.4.5 Variables.....	35
3.4.6 Constants	36
3.4.7 Functions.....	37
3.4.8 Function Specifications	38
3.4.9 ROM/RAM usage	40
4. Importing a Project.....	41
4.1 Procedure in e ² studio	41
4.2 Procedure in CS+	42
5. Start Demonstration.....	43
5.1 Powered on RX671 PoC and menu screen	44
5.2 Menu screen.....	44

5.3	Cook setting.....	45
5.3.1	Move to mode selection screen.....	45
5.3.2	Select mode.....	45
5.3.3	Select Auto	46
5.3.4	Select Manual.....	46
5.3.4.1	Set the number of watts	47
5.3.4.2	Move the cursor.....	47
5.3.4.3	Set the number of seconds	48
5.3.4.4	Start cooking	48
5.4	Defrost setting	49
5.4.1	Move to mode selection screen.....	49
5.4.2	Select mode.....	49
5.4.3	Select Manual.....	50
5.4.3.1	Set the level of defrosting.....	50
5.4.3.2	Move the cursor.....	51
5.4.3.3	Set the number of grams.....	51
5.4.3.4	Start defrosting	52
5.4.4	Select Fish.....	52
5.4.5	Select Meat.....	53
5.5	Recipe setting.....	54
5.5.1	Move to recipe selection screen.....	54
5.5.2	Select recipe.....	54
5.5.3	Select Beef Stew	55
5.5.4	Select Garlic Shrimp.....	55
5.5.5	Select Cup Cake.....	56
5.5.5.1	Set the number of cupcakes	56
5.5.5.2	Start cooking	57
5.6	About the "home" button.....	58
5.7	About the cooking completion screen	59
5.8	Automatic LCD off function.....	59
6.	Update firmware version.....	60
7.	How to create a user program that supports OTA.....	66
7.1	AWS Preparation.....	66
7.2	Import, configurate head file and build aws_demos and boot_loader.....	66
7.3	Install the initial version of firmware	76
8.	Restriction	84
9.	Reference Documents.....	85
	Revision History.....	86

1. Outline

This application note describes the operation and structure of the RX671 PoC. RX671 PoC is equipped with touch buttons, touch slider and LCD (240 x 320) and can be used as a demonstration to control the display and settings by imagining a microwave oven. In addition, RX671 PoC can rewrite the program OTA from the cloud.

The overall RX671 PoC image is shown below.

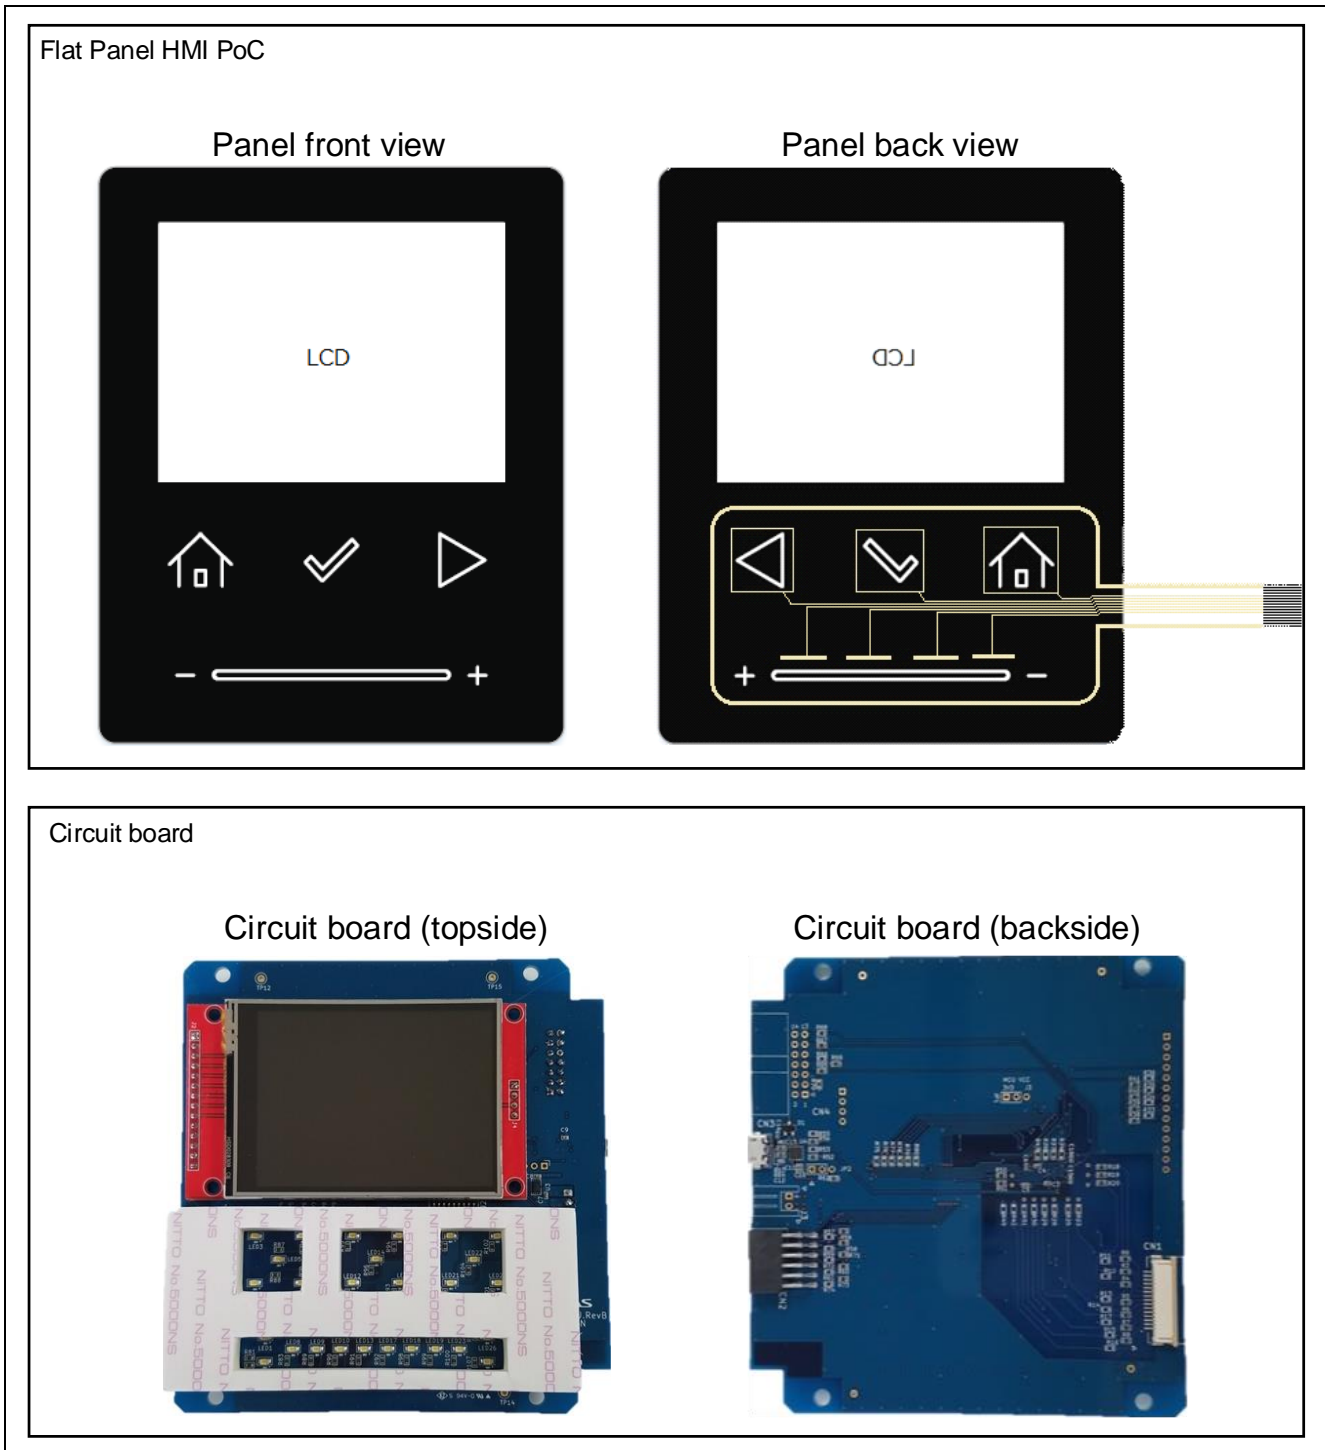


Figure 1-1 Overall RX671 PoC image

The system configuration is shown below.

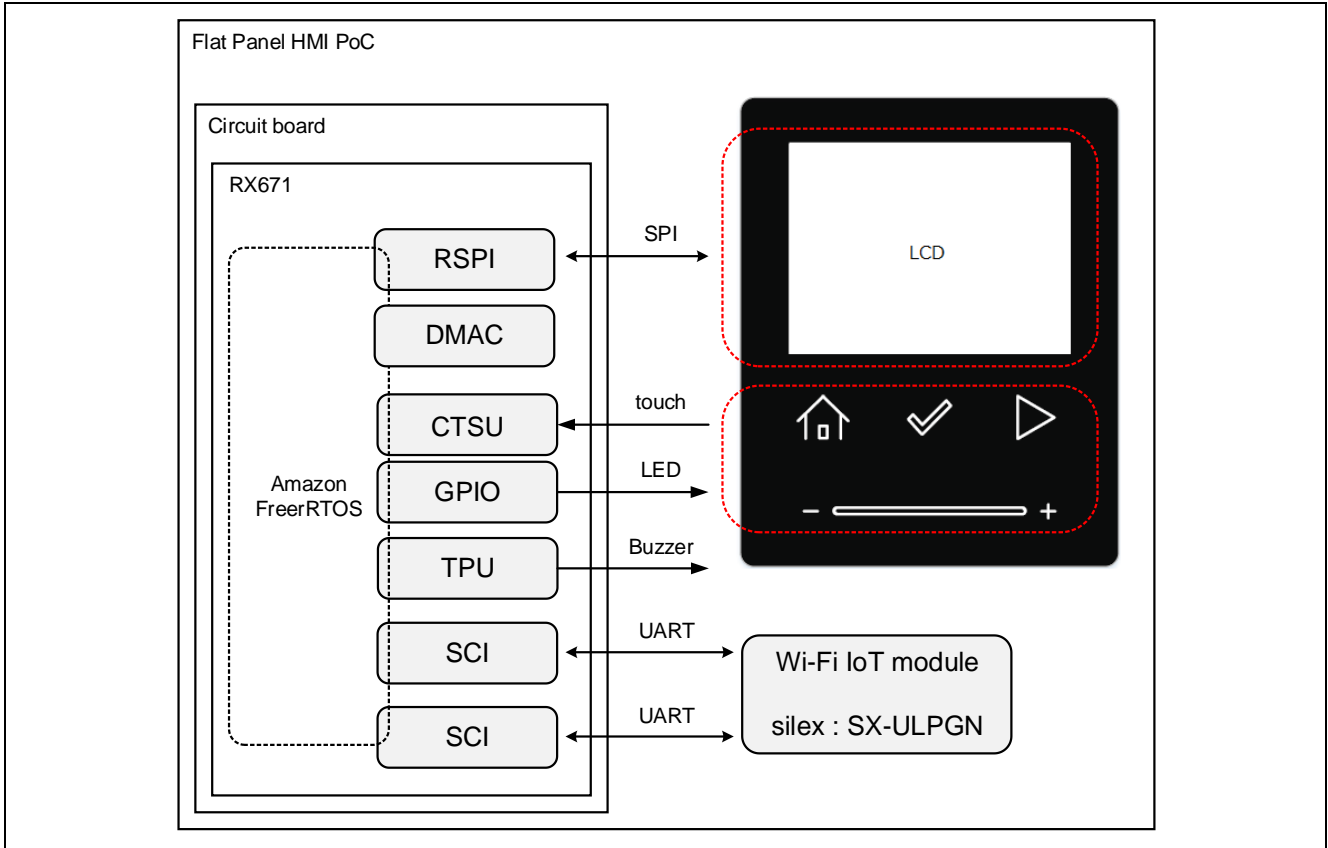


Figure 1-2 System configuration

The software configuration is shown below.

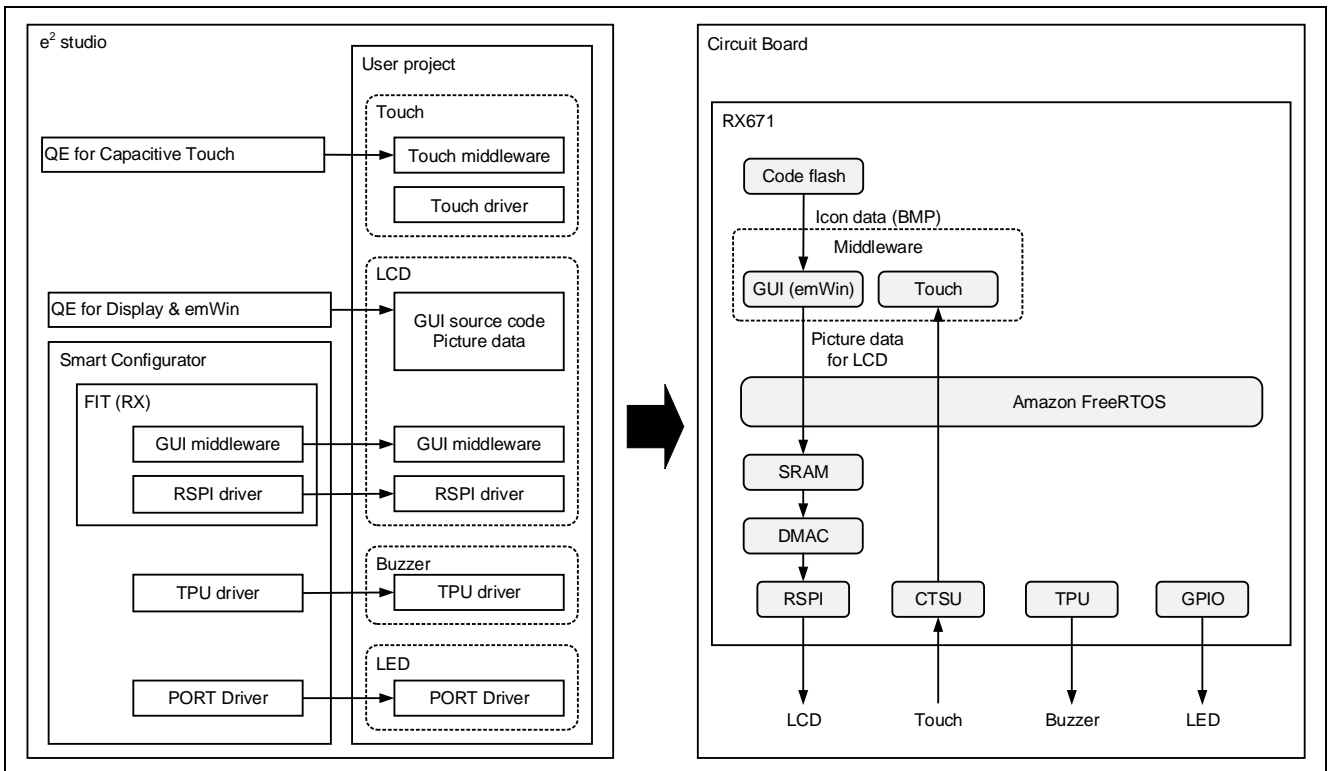


Figure 1-3 Software configuration

2. Operation Confirmation Conditions

The operation of the sample program has been confirmed under the following conditions.

Table 2-1 Operation Confirmation Conditions

Item	Contents
MCU used	R5F5671EHDFM (RX671 Group)
Operating frequency	Operating frequency (ICLK) : 120MHz Peripheral operating frequency (PCLKB) : 60MHz
Operating voltage	3.3 V
Integrated development	Renesas Electronics e ² studio Version 2023-01 (23.1.0)
C compiler	Renesas Electronics C/C++ Compiler Package for RX Family V3.05.00
	Compiler option Default settings of integrated development environment
Smart Configurator	V2.16.0
Board support package (r_bsp)	V7.20
Endian order	Little Endian
Operating mode	Single chip mode
Processor mode	Super visor mode
Sample code version	V1.00
Emulator	E2 Emulator Lite

Table 2-2 Operation Confirmation Conditions (LCD, Wi-Fi)

Item	Contents
LCD module	2.8 TFT SPI 240 × 320 serial port module
Wi-Fi module	Wi-Fi-Pmod-Expansion-Board (RTK00WFMX0B00000BE)

3. Sample Programs

3.1 Demonstration Screen Flowchart

The demonstration screen flowchart of this sample program is shown below. For detail on each screen, refer to chapter 5.

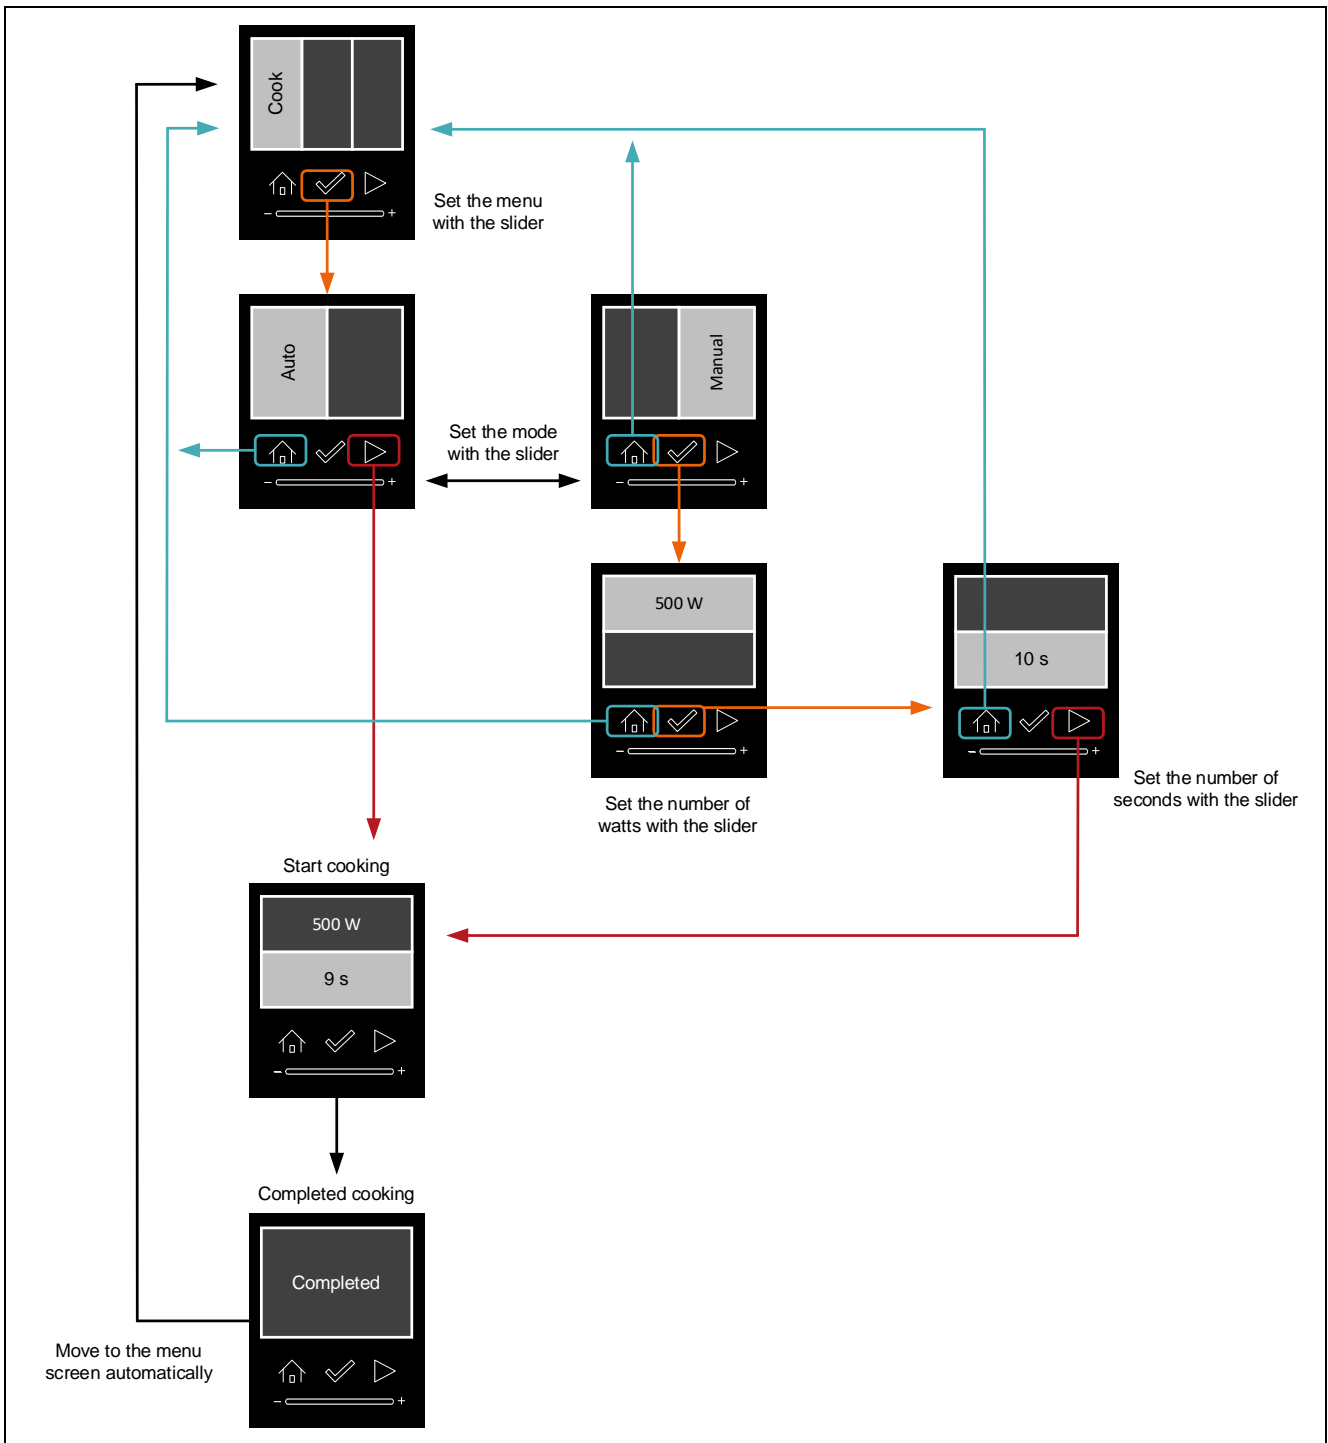


Figure 3-1 Flowchart of demonstration screen (Cook)

Recipe mode is not available with the firmware ver.0.90.

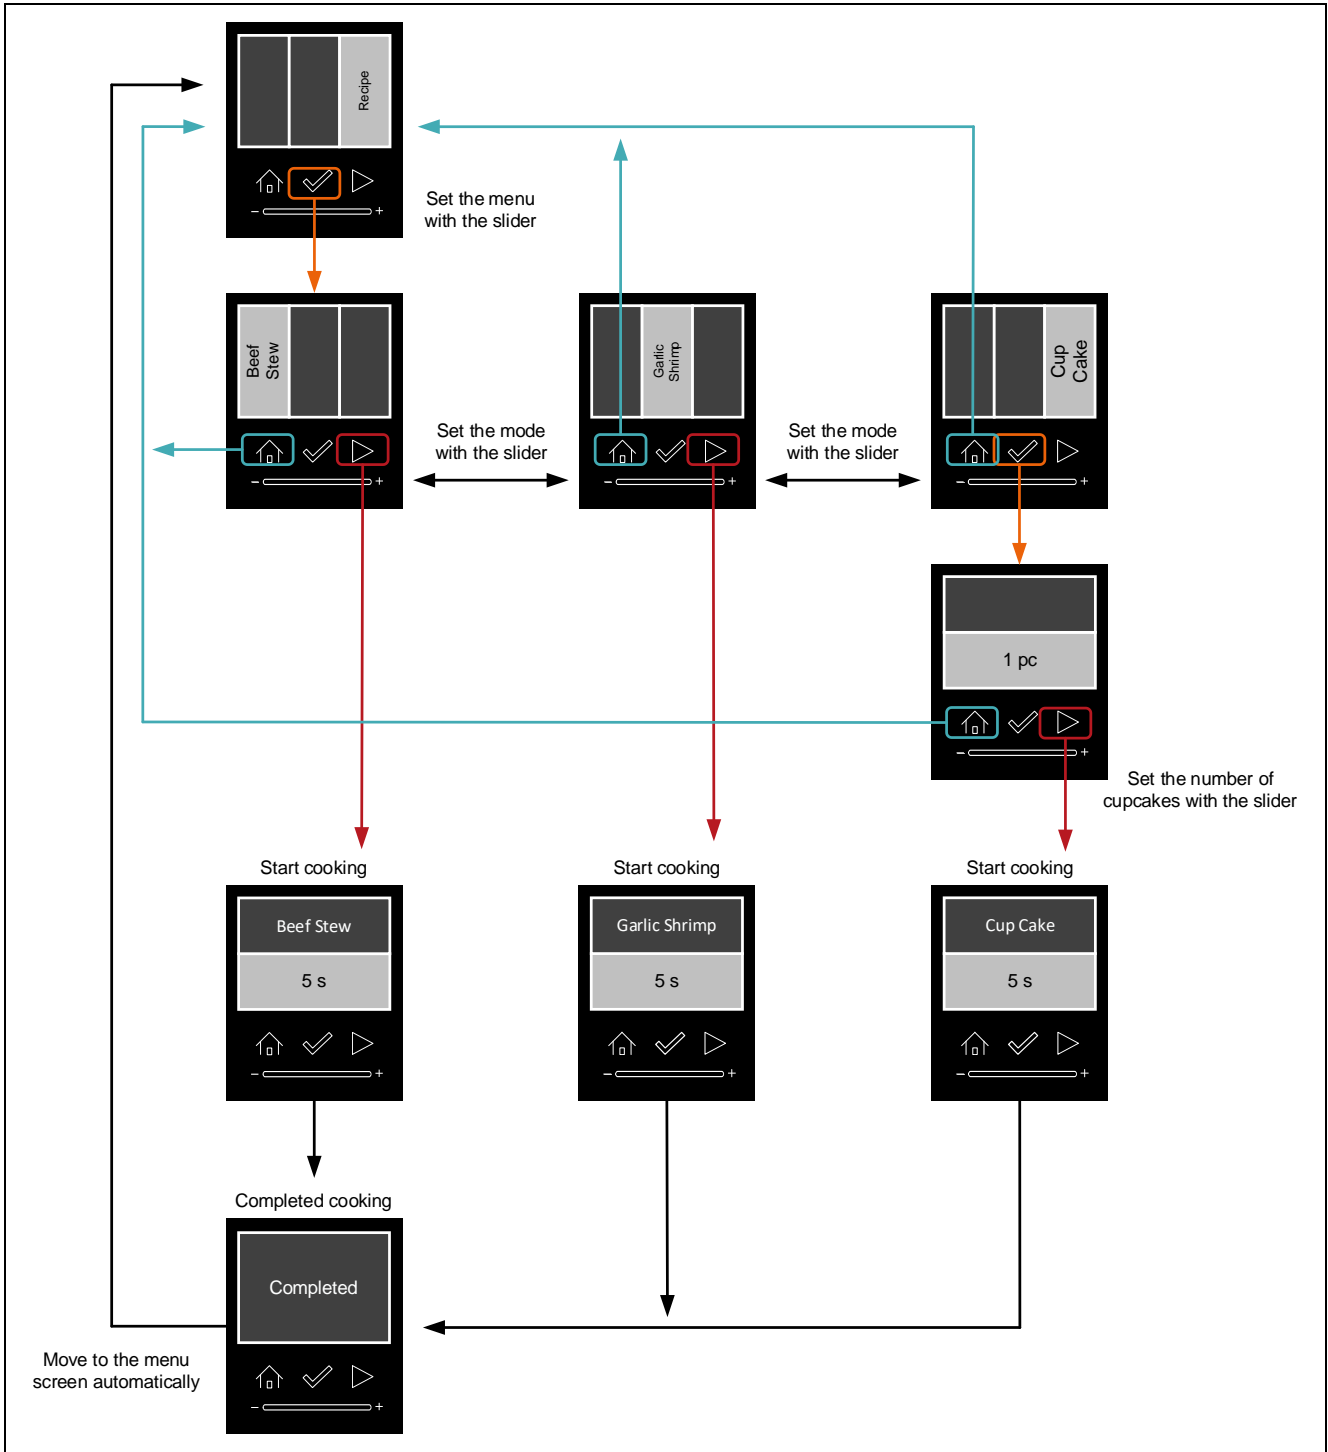


Figure 3-3 Flowchart of demonstration screen (Recipe)

3.2 Flowchart

3.2.1 Overall flowchart of LCD control

The overall flowchart of LCD control is shown below.

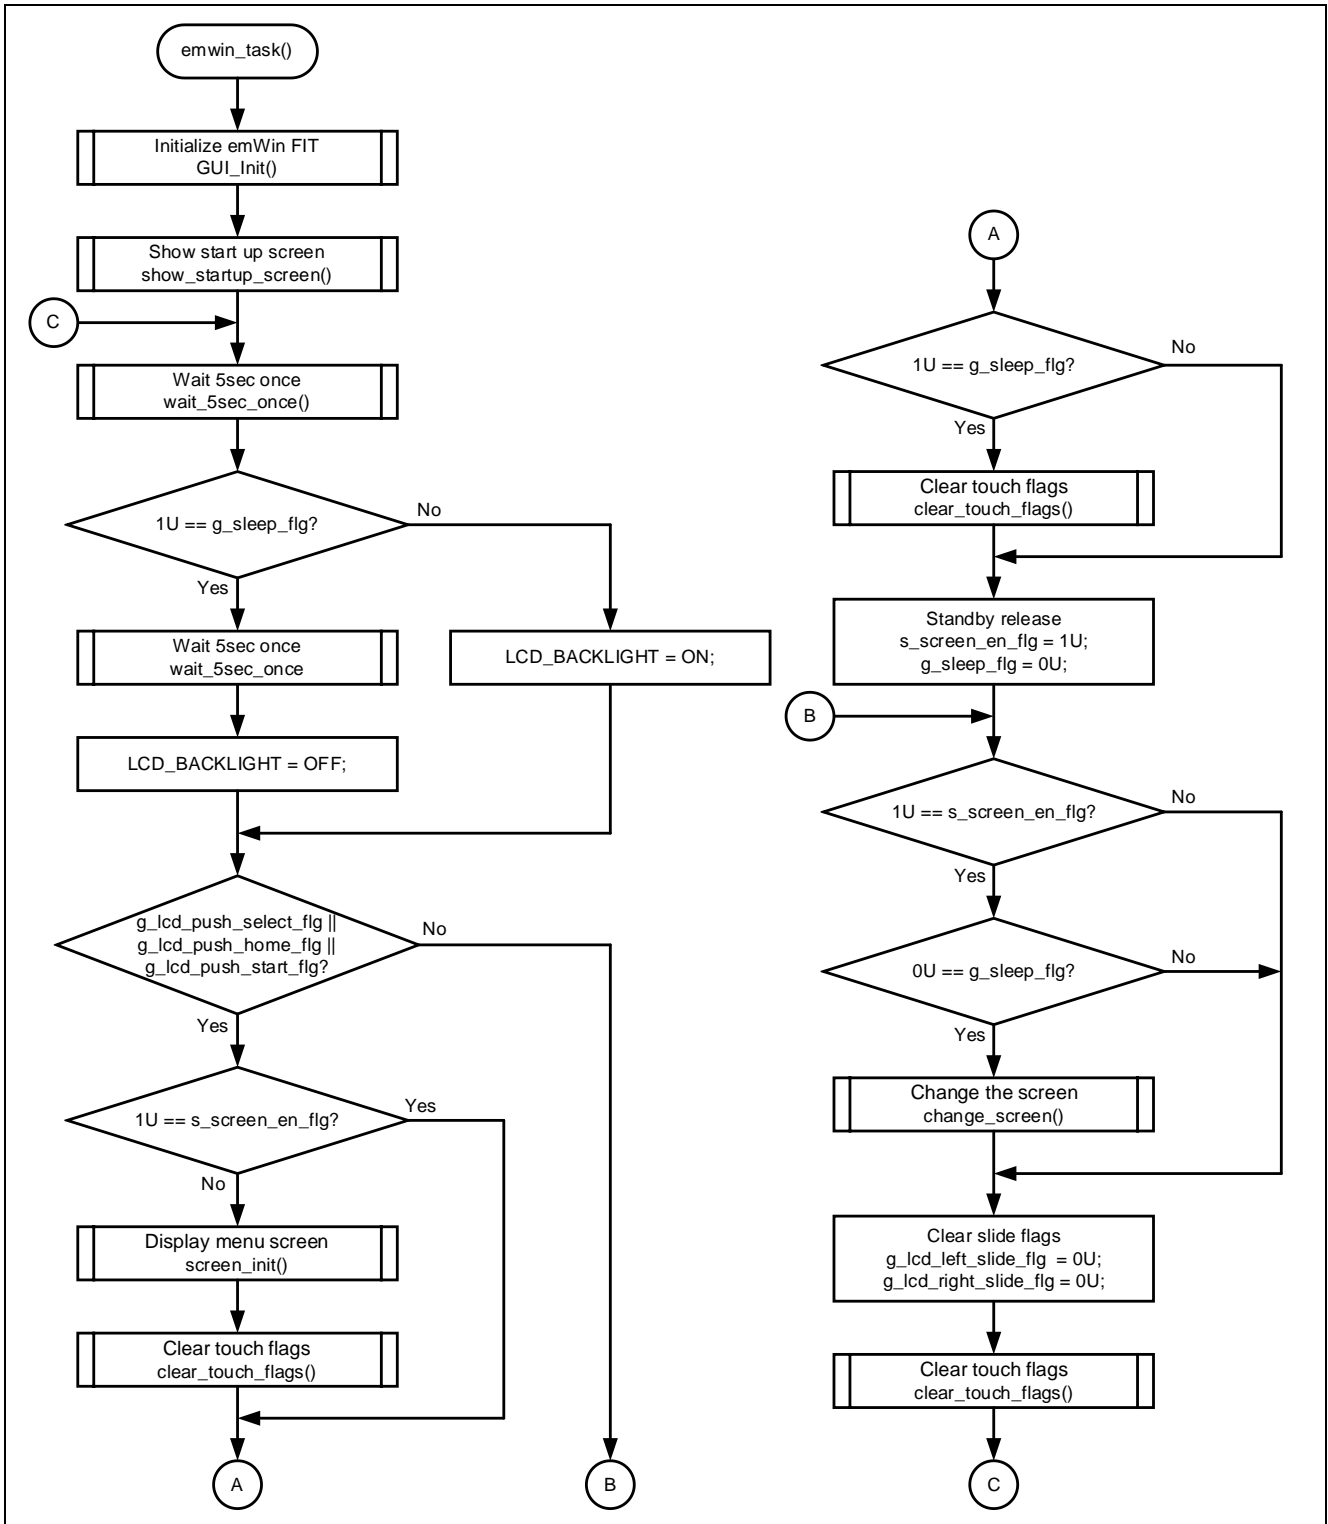


Figure 3-4 Overall flowchart of LCD control

3.2.2 Processing at touch keys operation

The flowchart for touch keys operation is shown below.

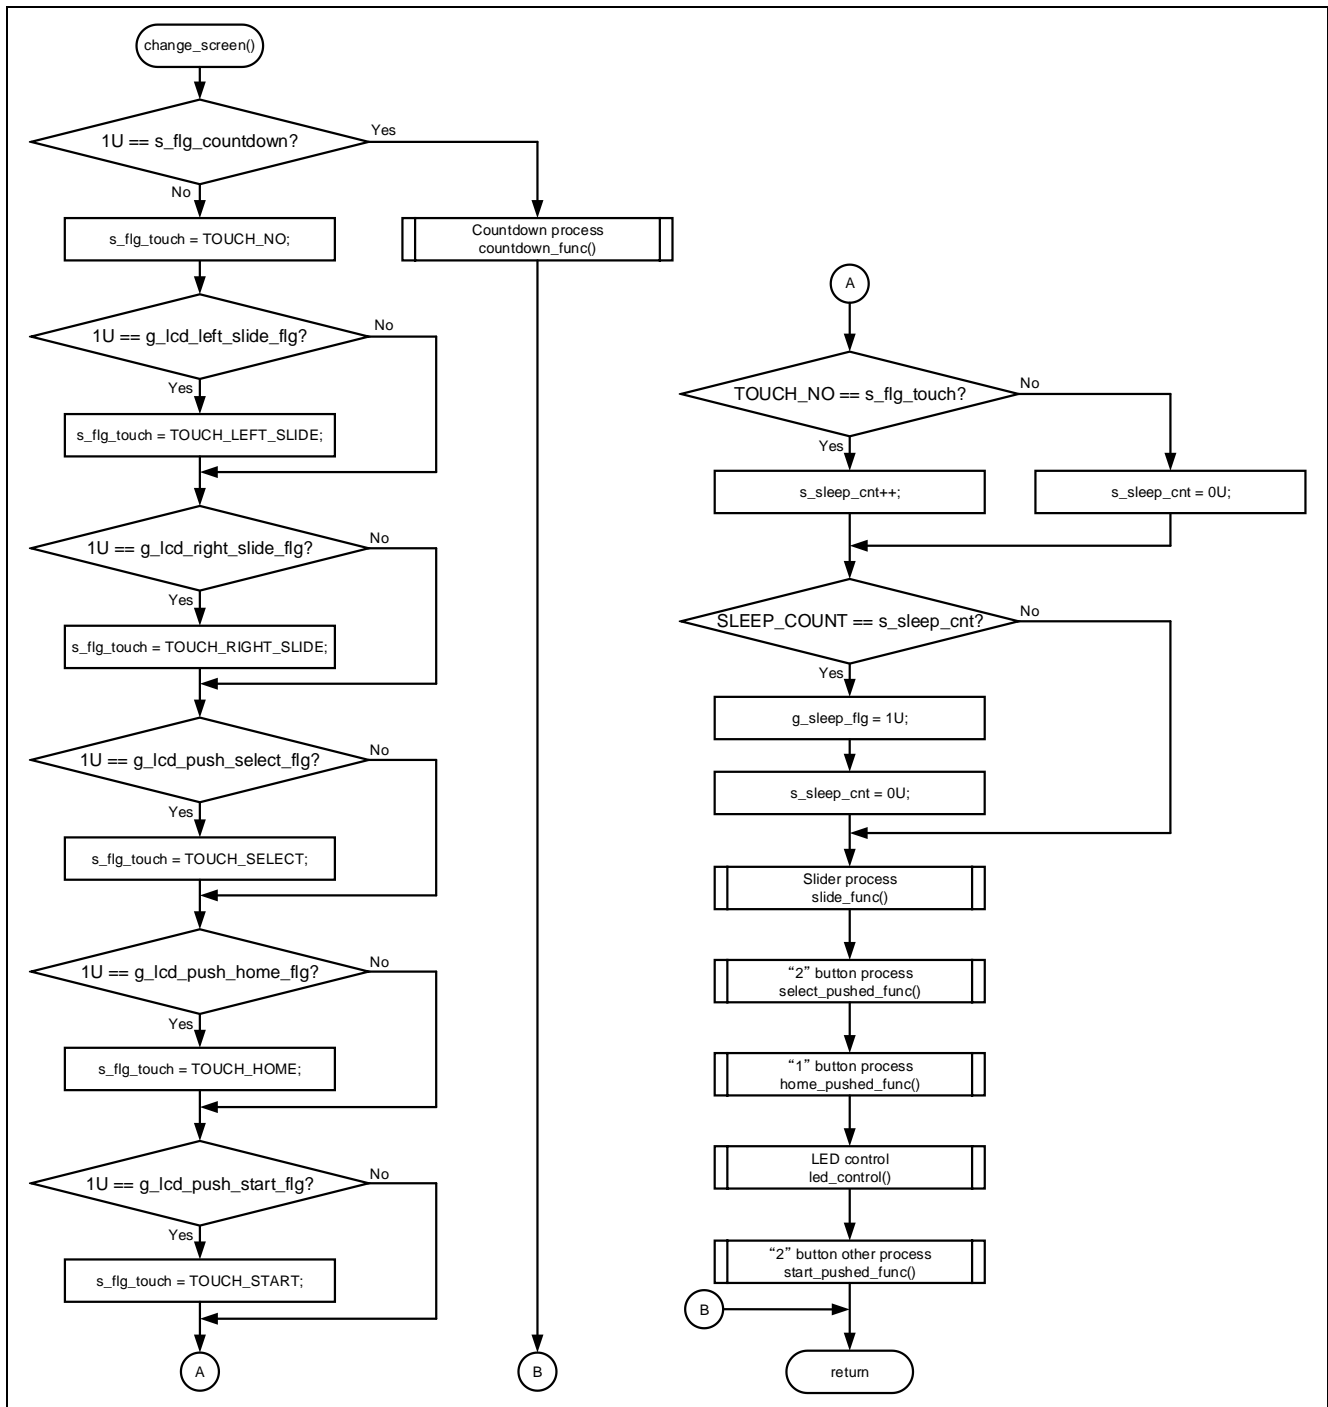


Figure 3-5 Flowchart for touch keys operation

3.2.3 Processing at touch slider operation

The flowchart for touch slider operation is shown below.

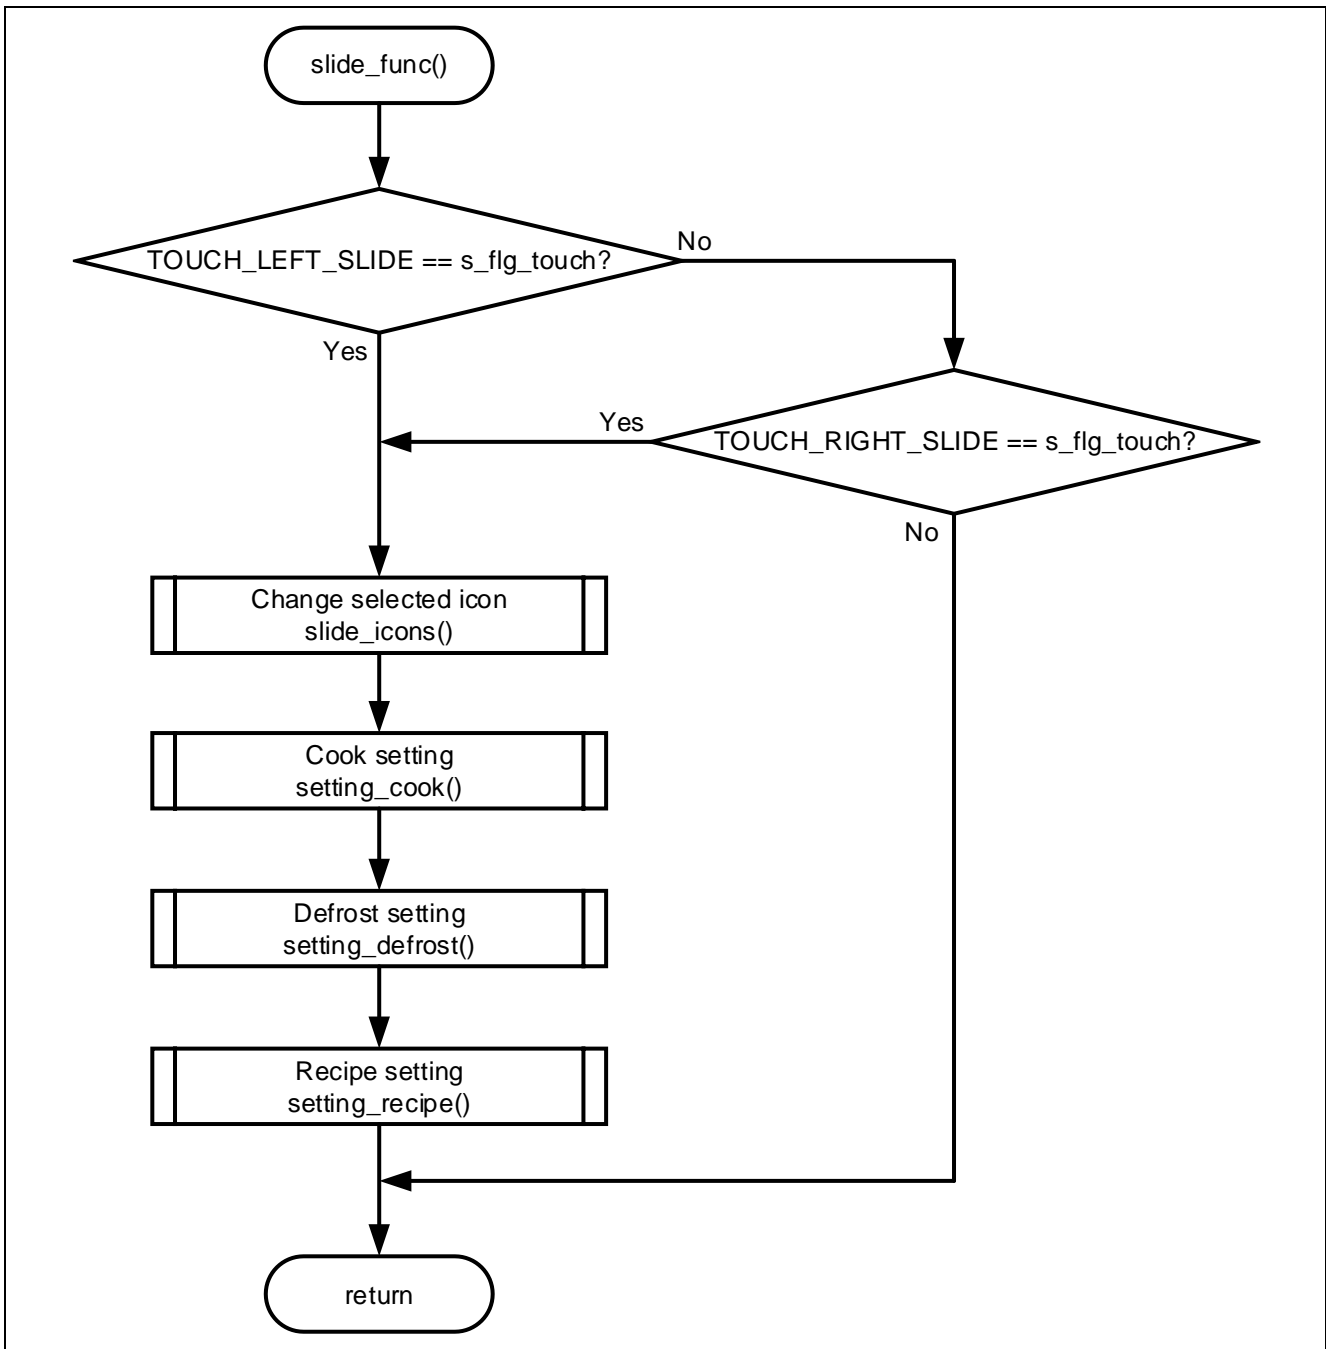


Figure 3-6 Flowchart for touch slider operation

3.2.4 Processing when the "home" button is touched

The flowchart when the "home" button is touched is shown below.

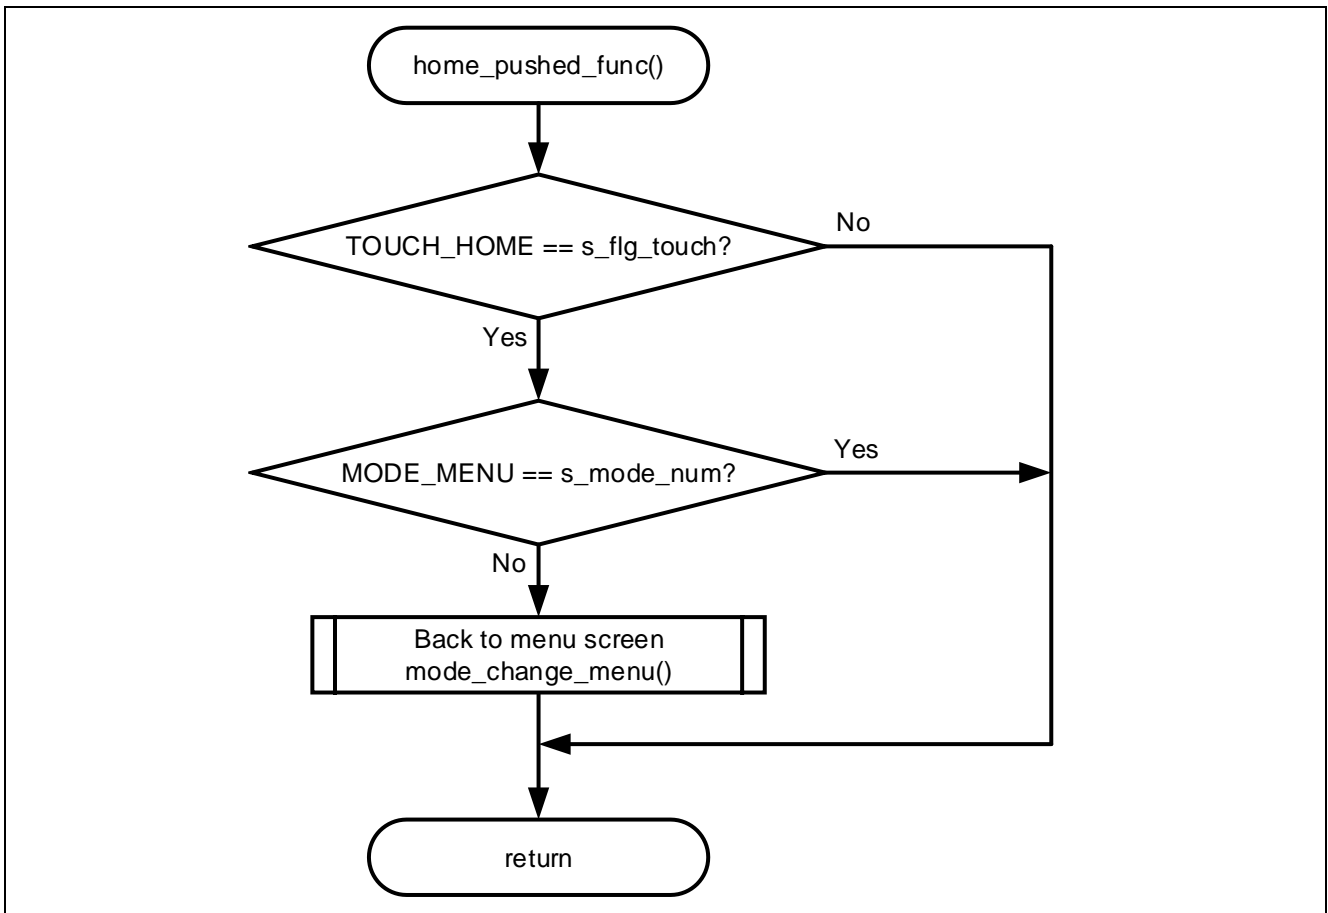


Figure 3-7 Flowchart when the "home" button is touched

3.2.5 Processing when the "select" button is touched

The flowchart when the "select" button is touched is shown below.

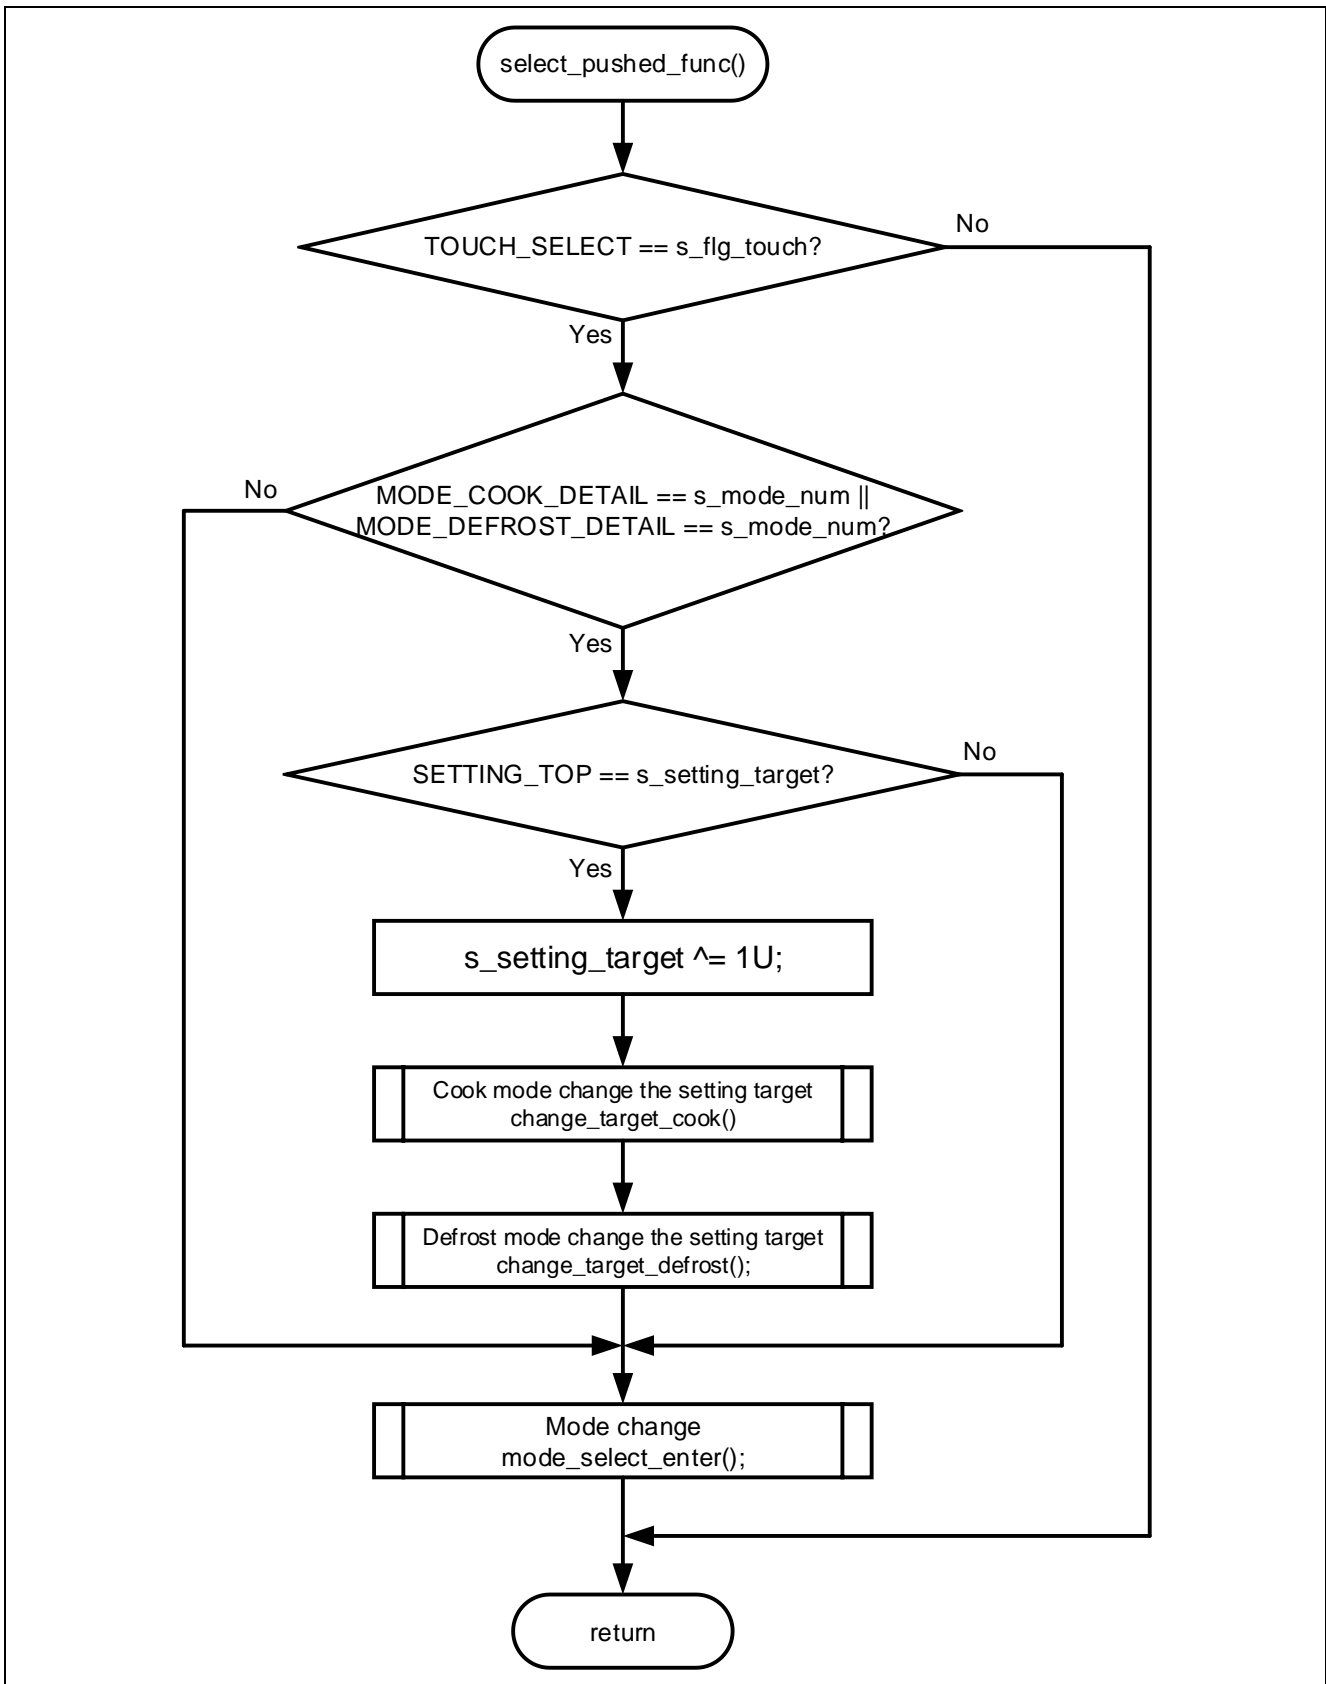


Figure 3-8 Flowchart when the "select" button touch is touched

3.2.6 Processing when the "start" button is touched

The flowchart when the "start" button is touched is shown below.

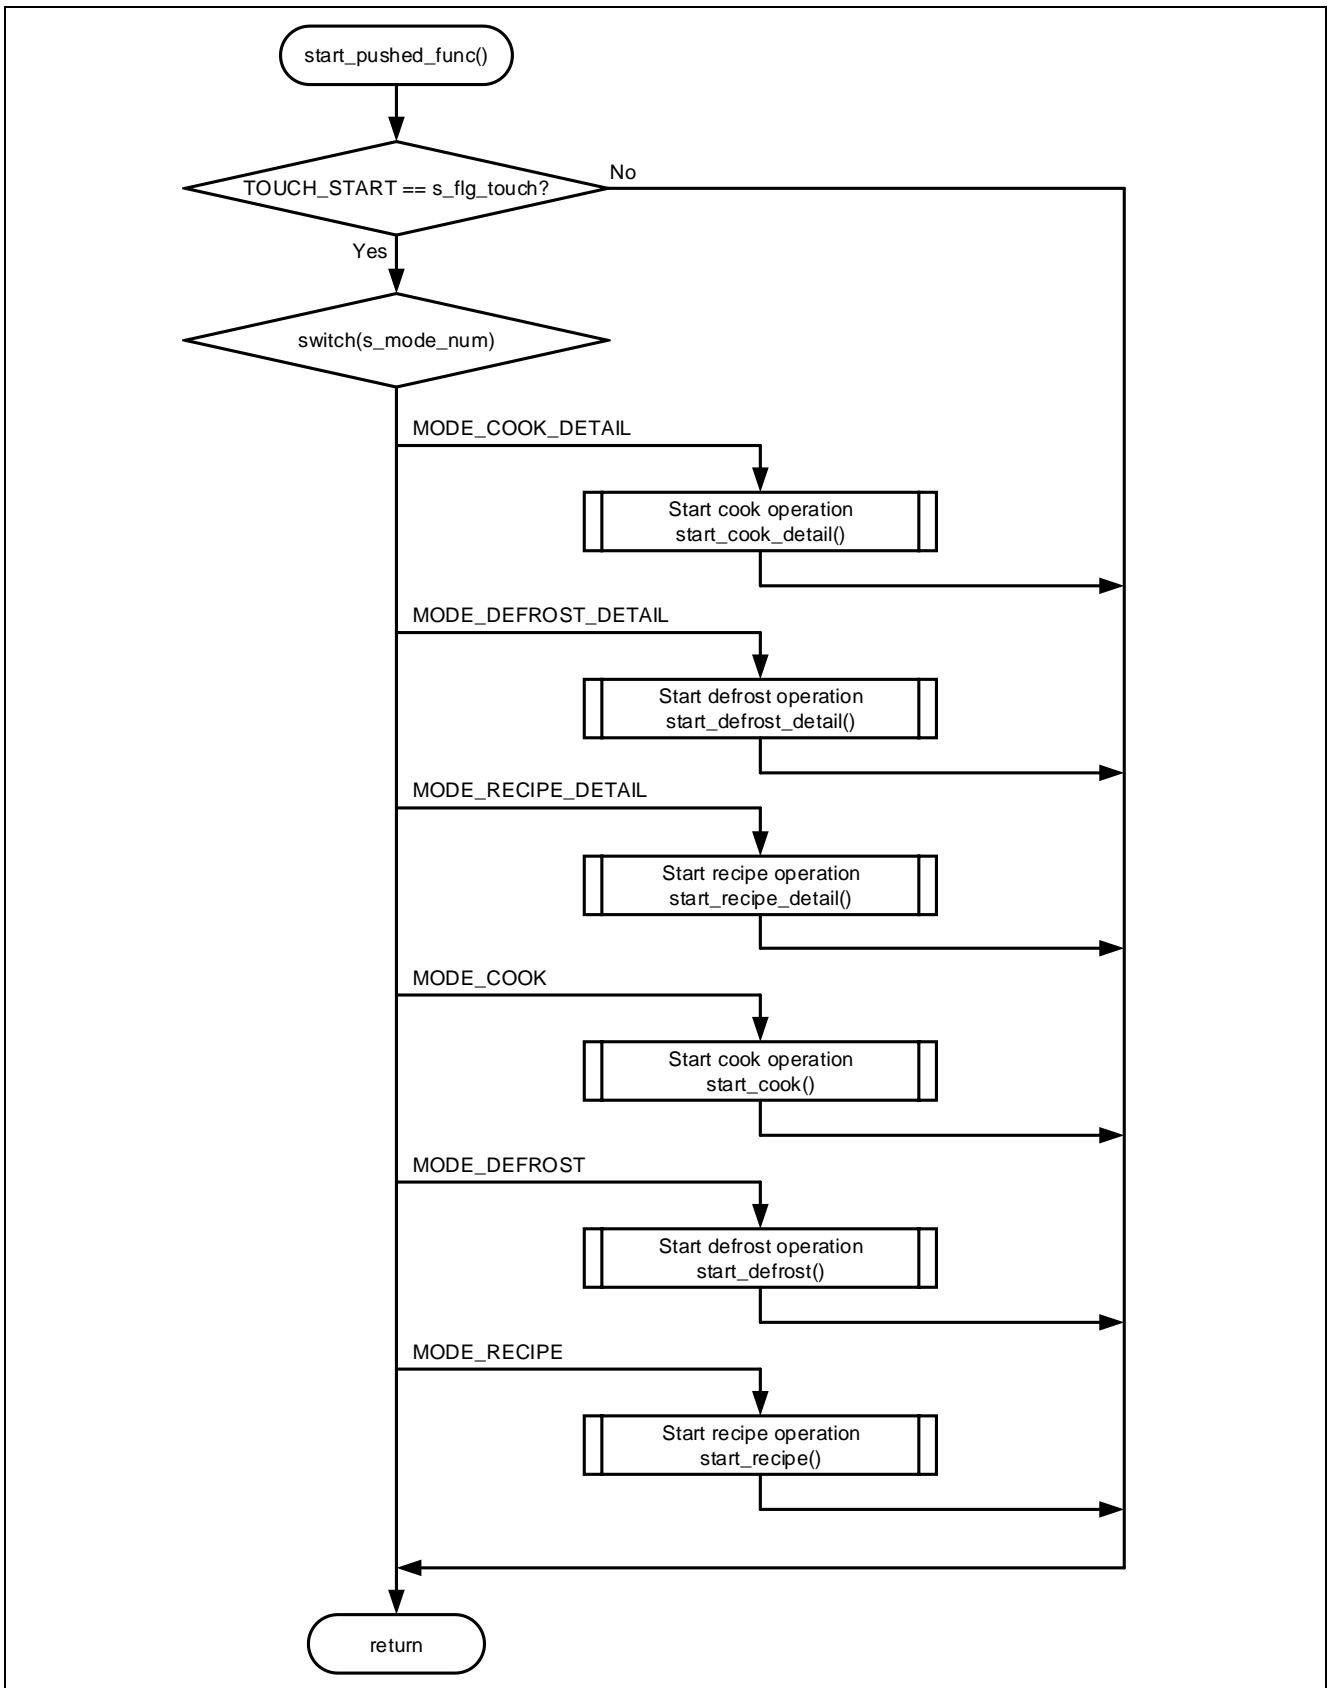


Figure 3-9 Flowchart when the "select" button is touched

3.2.7 Processing during cooking

The flowchart during cooking is shown below.

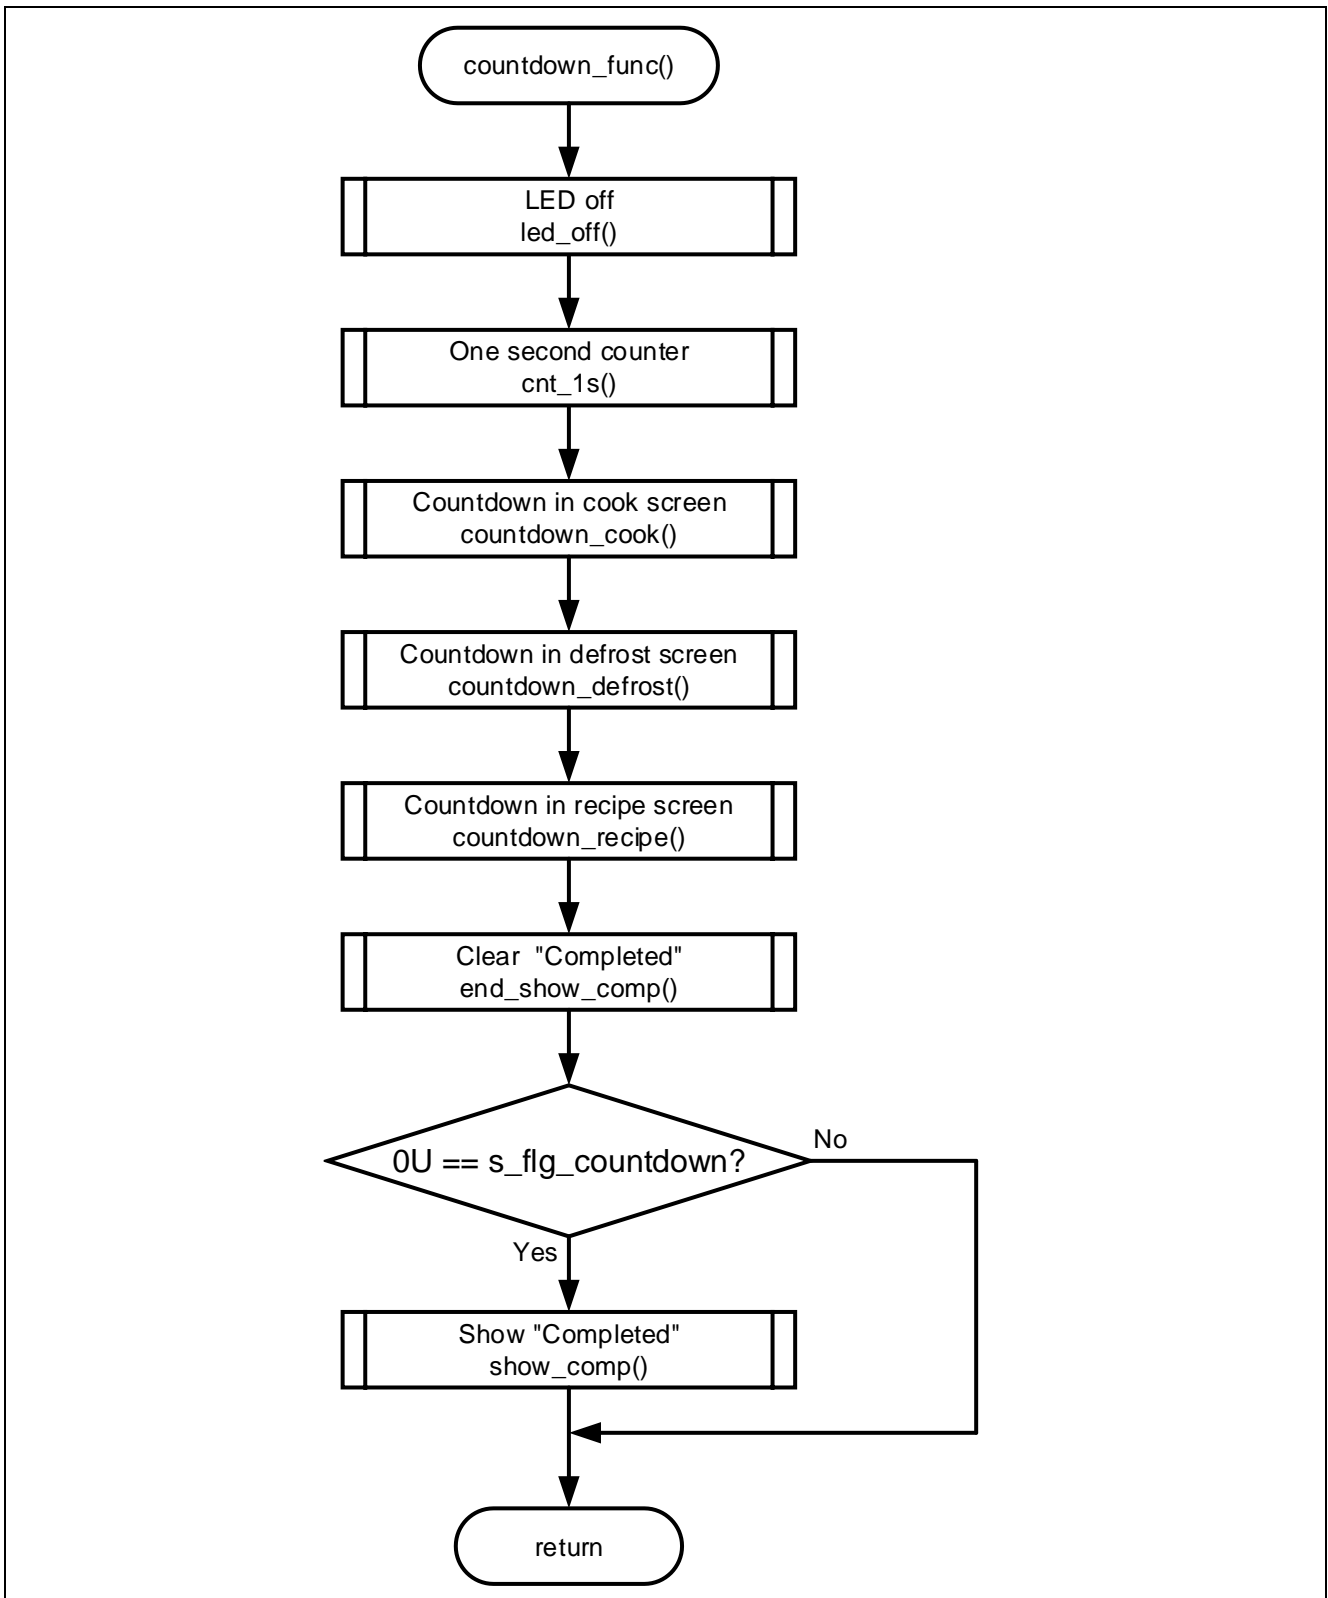


Figure 3-10 Flowchart during cooking

3.2.8 Overall flowchart of touch control

The overall flowchart of touch control is shown below.

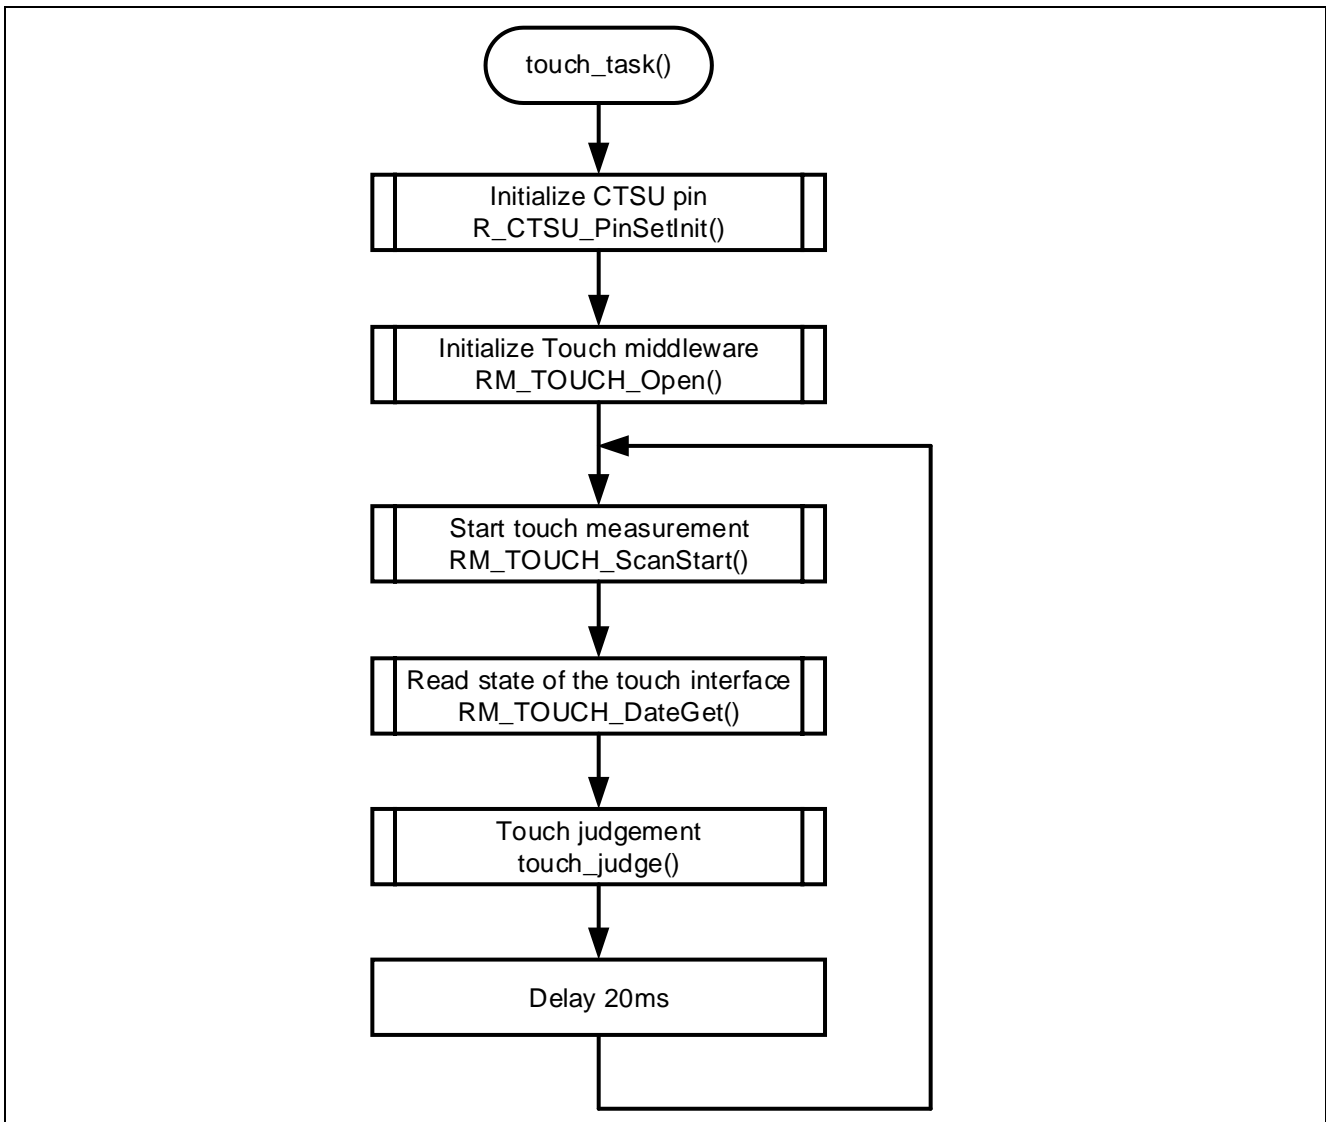


Figure 3-11 Overall flowchart of touch control

3.2.9 Processing of touch judgement

The flowchart of touch judgement is shown below.

If the left side of the touch slider is touched after touching the right side of the touch slider, the touch slider is judged to have slid to the left. The same is true on the opposite side.

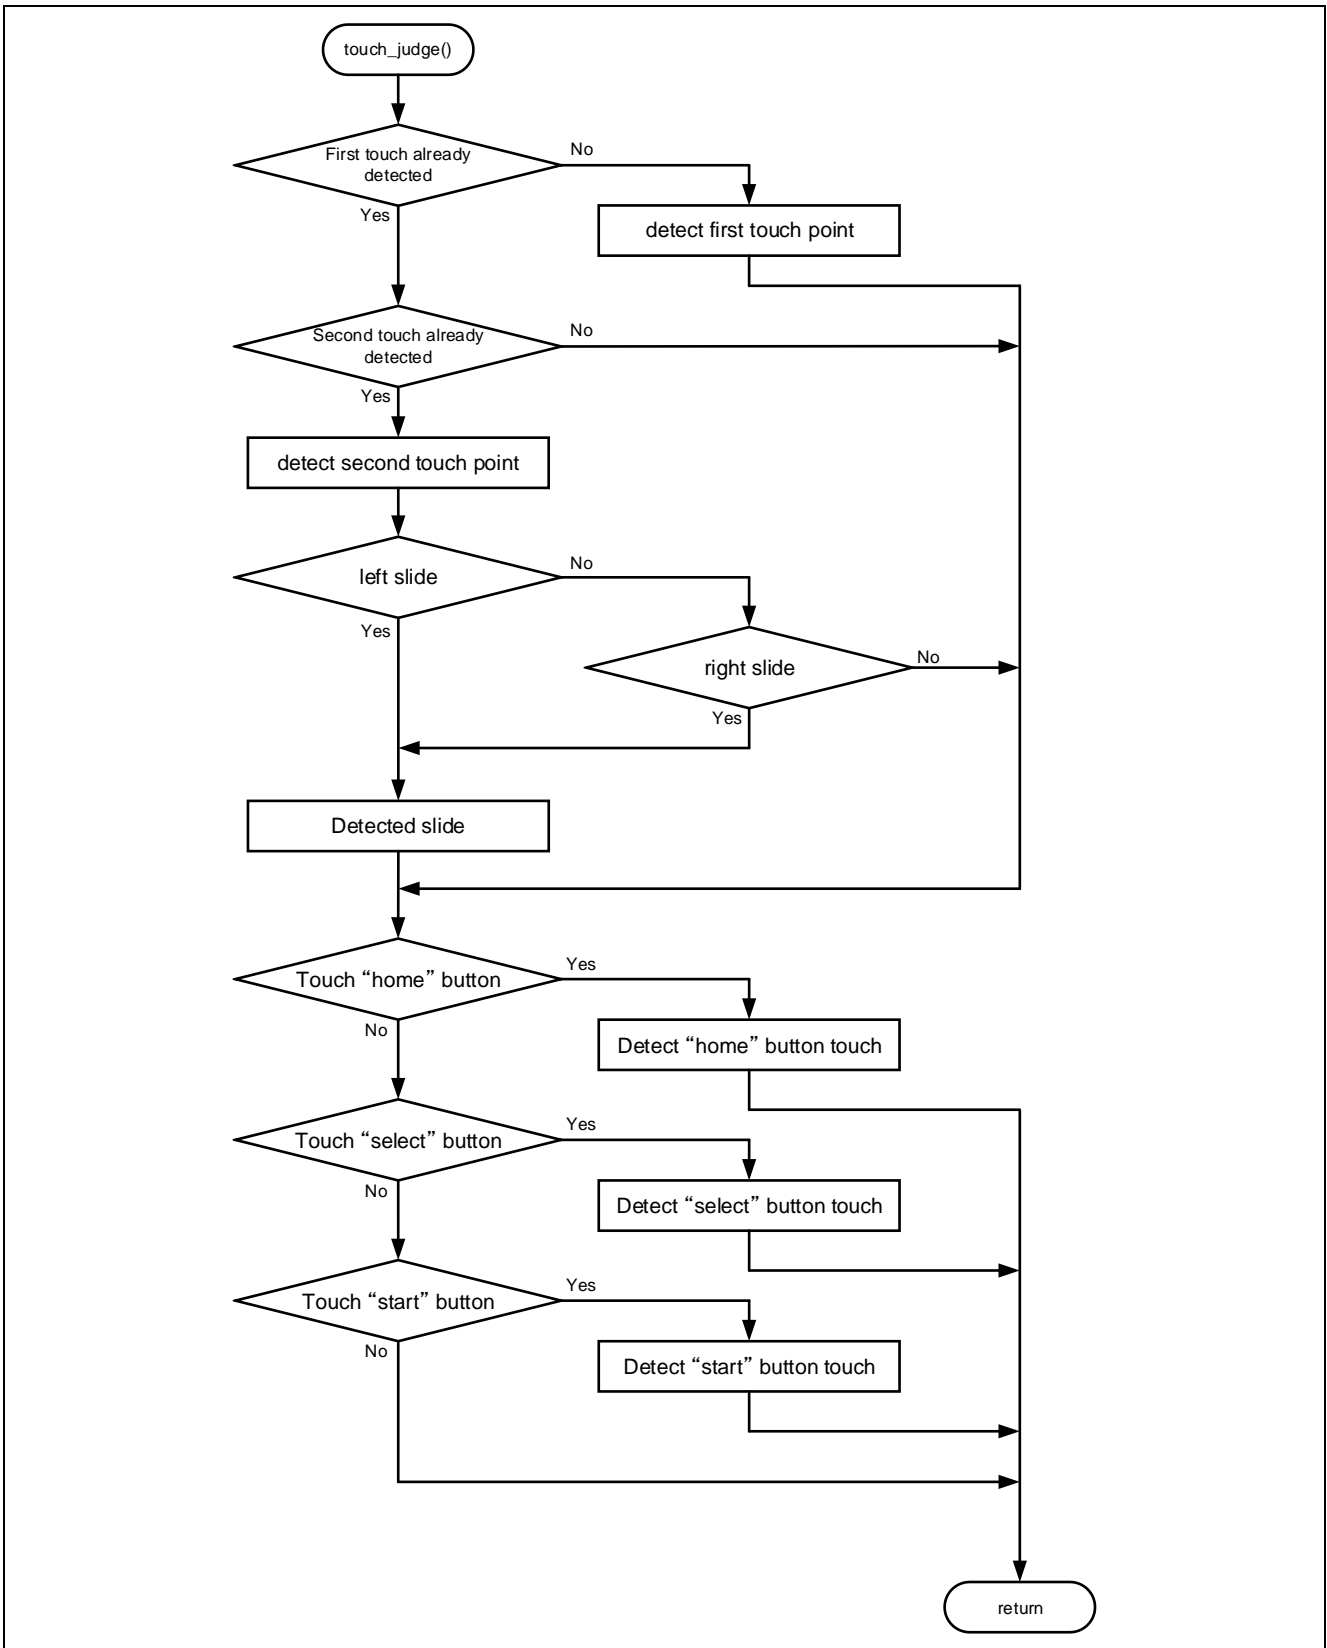


Figure 3-12 Flowchart of touch judgement

3.2.10 Processing of startup screen display

The flowchart of startup screen display is shown below.

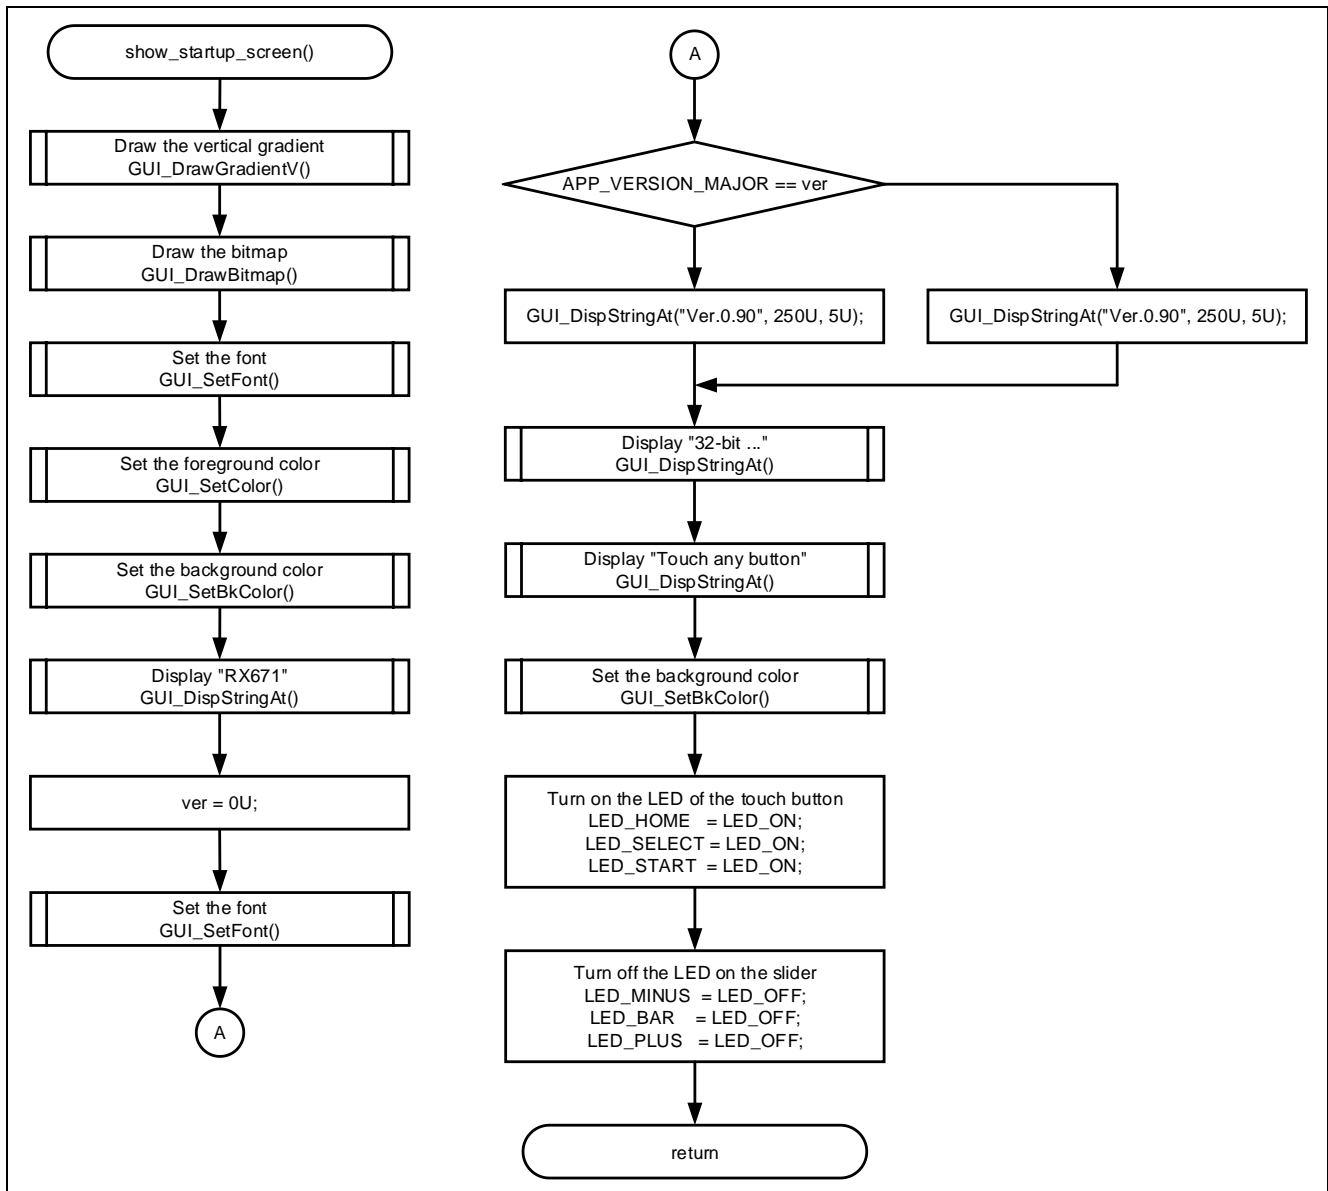


Figure 3-13 Flowchart of startup screen display

3.2.11 Processing of 5 seconds wait

The flowchart of 5 seconds wait is shown below.

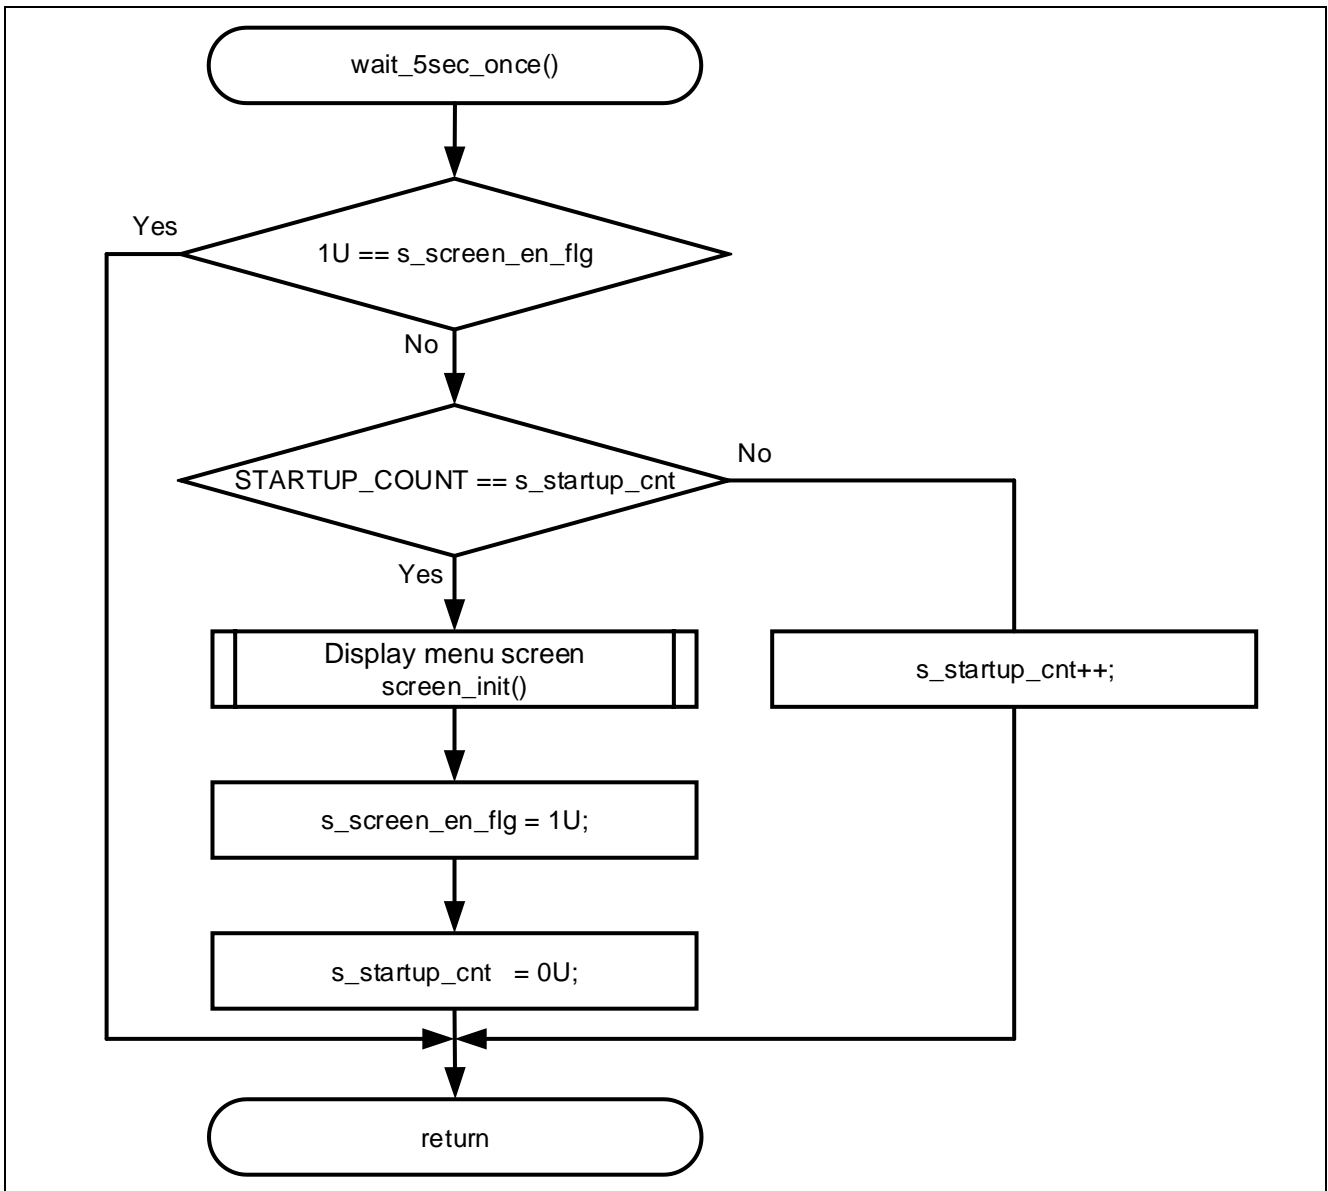


Figure 3-14 Flowchart of 5 seconds wait

3.2.12 Processing of flag clear for touch

The flowchart of flag clear for touch is shown below.

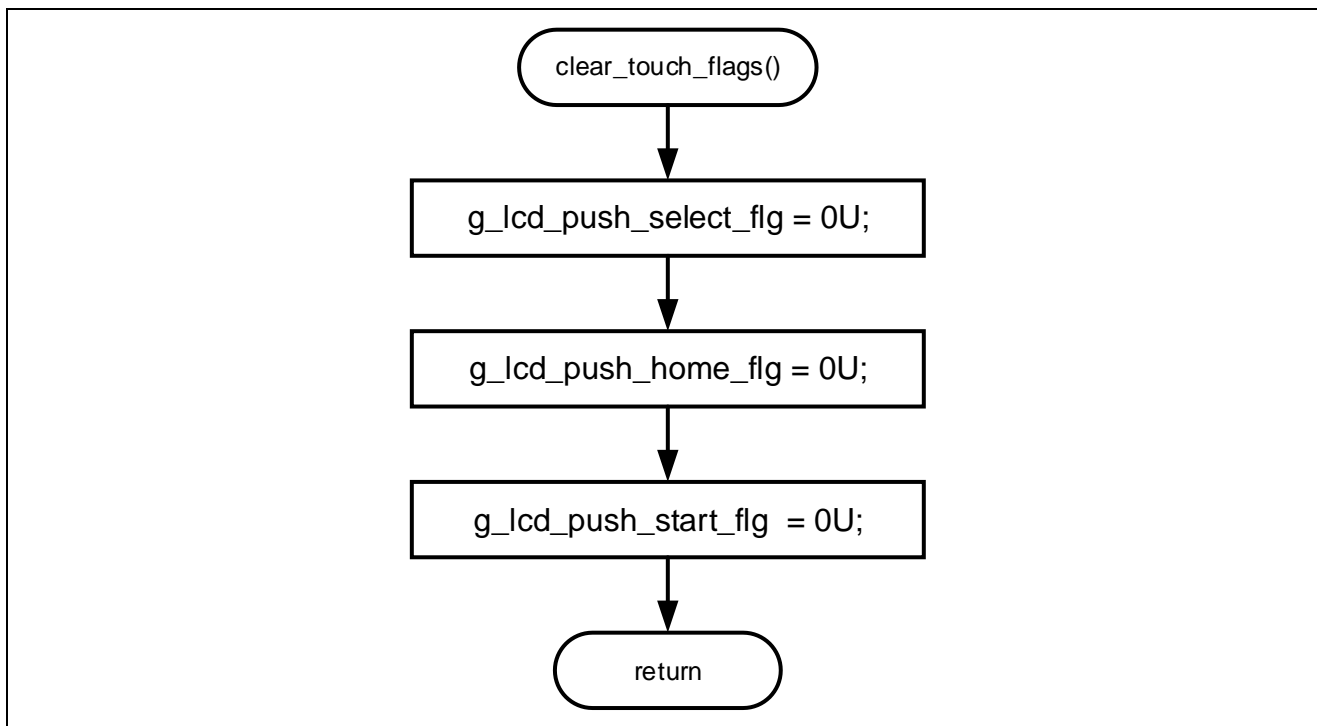


Figure 3-15 Flowchart of flag clear touch

3.2.13 Processing of screen initialization

The flowchart of screen initialization is shown below.

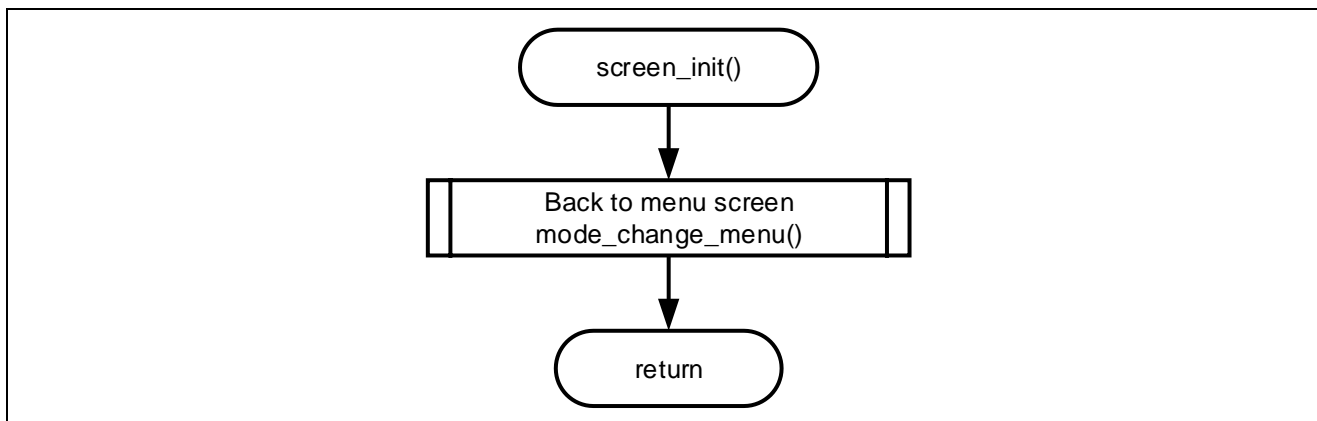


Figure 3-16 Flowchart of screen initialization

3.2.14 Processing at moving to the menu screen

The flowchart for moving to the menu screen is shown below.

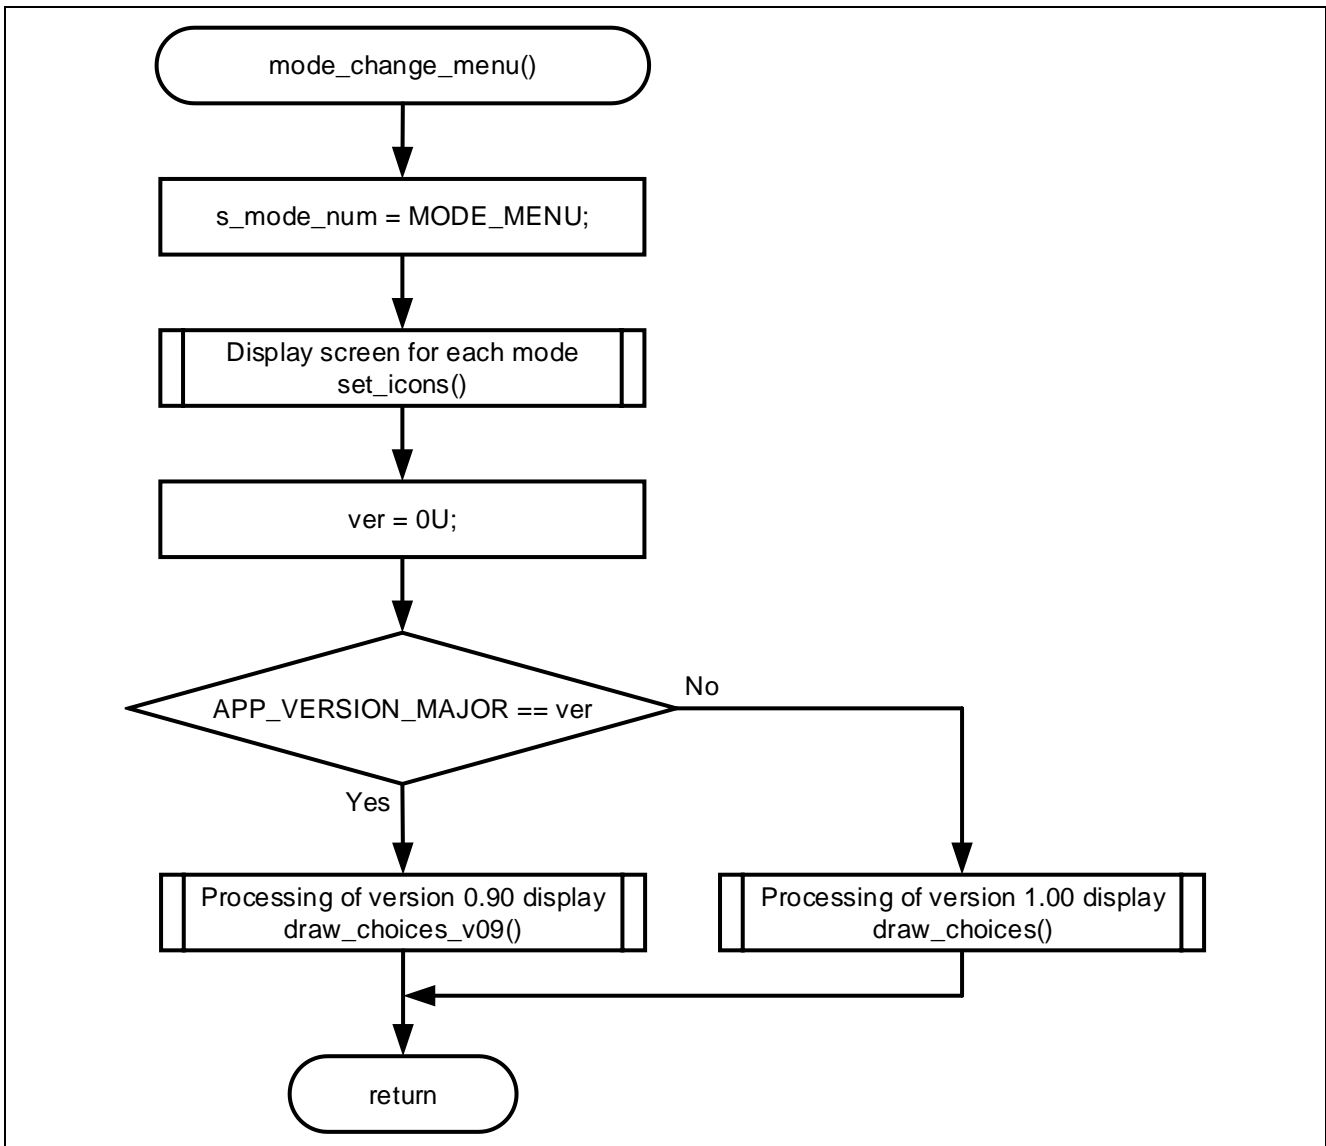


Figure 3-17 Flowchart for moving to the menu screen

3.2.15 Processing of setting LED pattern to sleep

The flowchart of setting LED pattern to sleep is shown below.

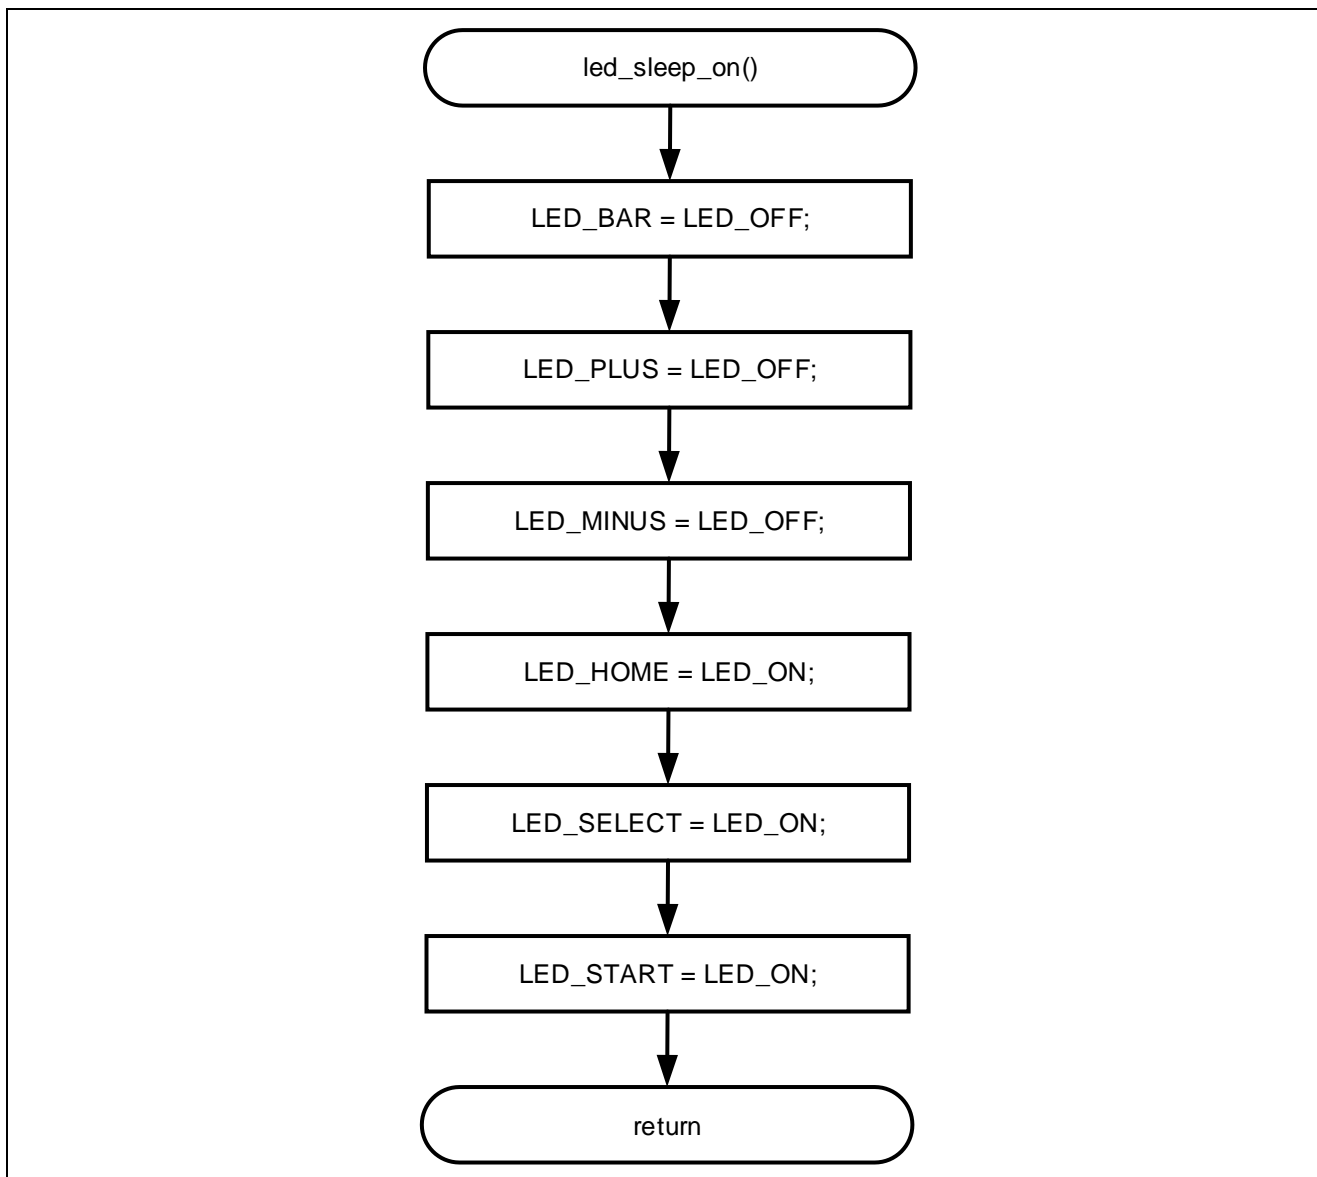


Figure 3-18 Flowchart of setting LED pattern to sleep

3.3 Pins Used

The following shows lists pins used in this sample program.

Table 3-1 List of Pins and Functions

Pin name	Input/Output	Function
P12/RXD2	Input	UART2 receiving pin
P13/TXD2	Output	UART2 sending pin
PE1/TXD12	Output	UART12 sending pin
PE2/RXD12	Input	UART12 receiving pin
PA6/CTS12	Input	CTS signal input pin
P16/RXD3	Input	USB-UART3 receiving pin
P17/TXD3	Output	USB-UART3 sending pin
P27/RSPCKB-A	Input/Output	RSPI1 clock pin
PE7/MISOB-B	Input	RSPI1 MISO pin
PE6/MOSIB-B	Output	RSPI1 MOSI pin
PC4/TSCAP	-	TSCAP pin
P34/TS0	Input	Electrostatic capacitance measurement pin
P26/TS3	Input	Electrostatic capacitance measurement pin
P53/TS12	Input	Electrostatic capacitance measurement pin
PC6/TS13	Input	Electrostatic capacitance measurement pin
PC5/TS14	Input	Electrostatic capacitance measurement pin
PC1/TS15	Input	Electrostatic capacitance measurement pin
PC0/TS16	Input	Electrostatic capacitance measurement pin
PD40~43, PD2, PD3	Output	LED pin
PB6/TIOCA5	Output	Buzzer pin

3.4 Sample Program Structure

3.4.1 Peripheral Functions Used

The following shows lists peripheral functions used in this sample program.

Table 3-2 List of Peripheral Functions Used and Functions

Peripheral Functions	Functions
RSP11	SPI Communication with LCD module
DMAC	Used for RAM to RSPI transfer
SCI2, SCI12	UART communication with Wi-Fi module (2 systems)
S12AD0	Used for inside CTSU FIT
CTSU	Used for touch buttons and touch slider
CMT0	Used for internal emWin FIT
CMT2	Used for RTOS
PORT	Used for LED
TPU5	Used for buzzer

3.4.2 Components Used

The following shows lists components used in this sample program.

Table 3-3 List of Components Used and Functions

Components	Abbreviation	Version
ADC Driver	r_s12ad_rx	5.00
AWS_device_shadow	AWS_device_shadow	1.0.110
AWS_ggd	AWS_ggd	1.0.110
AWS_mqtt	AWS_mqtt	1.0.110
AWS_secure_socket	AWS_secure_socket	1.0.110
AWS_tcp_ip	AWS_tcp_ip	1.0.110
Board Support Package	r_bsp	7.21
Byte-based circular buffer library	r_byteq	2.10
CMT driver	r_cmt_rx	5.40
CTSU QE API	r_ctsu_qe	2.20
DMAC driver	r_dmaca_rx	3.00
Flash API for RX100, RX200, RX600, and RX700	r_flash_rx	4.91
FreeRTOS_kernel	FreeRTOS_kernel	1.0.110
FreeRTOS_Object	FreeRTOS_Object	1.0.112
GPIO Driver	r_gpio_rx	4.70
Graphic Library with Graphical User Interface	r_emwin_rx	6.32.a.1.00
PWM Mode Timer	Config_TPU5	1.12.0
RSPI Driver	r_rspi_rx	3.04
SCI Driver	r_sci_rx	4.60
Touch QE API	rm_touch_qe	2.20
Wi-Fi Module control functions for Renesas MCUs	r_wifi_sx_ulpgn	1.16
Port	Config_PORT	2.4.1

3.4.3 Peripheral Function Settings

The Smart Configurator settings used in this sample program are shown below. The items and settings in each table in the Smart Configurator settings are described in the notation on the configuration screen.

Settings not listed are assumed to be default settings.

Table 3-4 Parameters of Smart Configurator (1/6)

Category	Item	Setting/Description
Smart Configurator >> Clock		The following settings are made on the "Clocks" Tab.
	VCC	3.3 (V)
	Main clock	Stopped: Unchecked.
	PLL circuit setting	Frequency Division: x1 Frequency Multiplication: x15
	HOCO clock	Operation: Checked. HOCO oscillation enabled after reset
	LOCO clock	Stopped: Unchecked.
	IWDT dedicated clock	Clock source: HOCO Flash IF clock (FCLK): 60MHz System clock (ICLK): 120MHz Peripheral module clock (PCLKA): 120MHz Peripheral module clock (PCLKB): 60MHz Peripheral module clock (PCLKC): 60MHz Peripheral module clock (PCLKD): 60MHz
Smart Configurator >> System		Debugging interfaces setting: FINE
Smart Configurator >> Components >> r_bsp		Default settings except following changes
	Heap size	0x4000
	ROM Cache Enable Register	Disabled
	Software Interrupt Unit2 (SWINT2)	Used
	Software Interrupt Task Buffer Number	8
	Initial value of the software interrupt priority	Priority level 1
	Serial terminal select	Enabled
	Channel for serial terminal	Channel 3
	Bitrate for serial terminal	115200
	Interrupt priority serial terminal	Priority level 3
	HOCO Trimming select	Disabled
Smart Configurator >> Components >> r_dmaca_rx		Default settings are used.
Smart Configurator >> Components >> r_s12ad_rx		Default settings except following changes
	Resources >> S12AD	
	S12AD0	Checked.
Smart Configurator >> Components >> r_ctsu_qe		Default settings except following changes
	TSCAP pin	Use: Checked.
	TS0 pin	Use: Checked.
	TS2 pin	Use: Checked.
	TS3 pin	Use: Checked.
	TS12 pin	Use: Checked.
	TS13 pin	Use: Checked.
	TS14 pin	Use: Checked.
	TS15 pin	Use: Checked.
	TS16 pin	Use: Checked.

Table 3-5 Parameters of Smart Configurator (2/6)

Category	Item	Setting/Description
Smart Configurator >> Components >> r_gpio_rx		Default settings are used.
Smart Configurator >> Components >> r_flash_rx		Default settings except following changes
	Enable code flash programming (FLASH_CFG_CODE_FLASH_ENABLE)	Includes code to program ROM area
	Enable BGO/Non-blocking data flash operations (FLASH_CFG_DATA_FLASH_BGO)	Enable BGO mode
	Enable BGO/Non-blocking code flash operations (FLASH_CFG_CODE_FLASH_BGO)	Enable BGO mode
	Enable code flash self-programming (FLASH_CFG_CODE_FLASH_RUN_FROM_ROM)	Programming code flash while executing from another segment in ROM
Smart Configurator >> Components >> r_rspi_rx		Default settings except following changes
	Dummy data of reception	0x00
	RSPI channel 0	Unused
	RSPI channel 1	Used
	RSPI channel 2	Unused
	Interrupt priority level of RSPI channel 1	Level 3
	RSPI1	Checked
	RSPCKB pin	Use: Checked.
	MOSIB pin	Use: Checked.
	MISOB pin	Use: Checked.
Smart Configurator >> Components >> r_sci_rx		Default settings except following changes
	Use ASYNC mode	Include
	Use SSPI mode	Include
	Include software support for channel 2 (SCI_CFG_CH2_INCLUDED)	Include
	Include software support for channel 3 (SCI_CFG_CH3_INCLUDED)	Include
	Include software support for channel 12 (SCI_CFG_CH12_INCLUDED)	Include
	ASYNC mode TX queue buffer size for channel 3 (SCI_CFG_CH3_TX_BUFSIZ)	2048
	ASYNC mode TX queue buffer size for channel 12 (SCI_CFG_CH12_TX_BUFSIZ)	2048
	ASYNC mode RX queue buffer size for channel 3 (SCI_CFG_CH3_RX_BUFSIZ)	2048
	ASYNC mode RX queue buffer size for channel 12 (SCI_CFG_CH12_RX_BUFSIZ)	2048
	Resources >> SCI	
	SCI2	Checked.
	RXD2/SMISO2/SSCL2 Pin	Use: Checked.
	TXD2/SMOSI2/SSDA2 Pin	Use: Checked.
	SCI3	Checked
	RXD3/SMISO3/SSCL3 Pin	Use: Checked
	TXD3/SMOSI3/SSDA3 Pin	Use: Checked
	SCI12	Checked.
	RXD12/SMISO12/SSCL12 Pin	Use: Checked.
	TXD12/SMOSI12/SSDA12 Pin	Use: Checked.
	CTS12#/RTS12#/SS12# Pin	Use: Checked.

Table 3-6 Parameters of Smart Configurator (3/6)

Category	Item	Setting/Description
Smart Configurator >> Components >> r_cmt_rx		Default settings are used.
Smart Configurator >> Components >> rm_touch_qe		Default settings are used.
Smart Configurator >> Components >> r_byteq		Default settings are used.
Smart Configurator >> Components >> r_wifi_sx_ulp gn		Default settings except following changes
	SCI Channel number for SX-ULPGN Initial Command Port for AT command communication (WIFI_CFG_SCI_CHANNEL)	12
	SCI Channel number for SX-ULPGN Second Command Port for AT command communication (WIFI_CFG_SCI_SECOND_CHANNEL)	2
	General-purpose port PDR register connected to the SX-ULPGN EN pin (WIFI_CFG_RESET_PORT)	PORTH
	Configure RTS Port No. for WIFI_CFG_SCI_CHANNEL (WIFI_CFG_RTS_PORT)	PORTH
	Configure RTS Pin No. for WIFI_CFG_SCI_CHANNEL (WIFI_CFG_RTS_PIN)	1
	Socket Receive buffer size (WIFI_CFG_SOCKETS_RECEIVE_BUFFER_SIZE)	1024
Smart Configurator >> Components >> r_emwin_rx		Other than the changes listed below, default settings are used.
	Configurations >> BasicSetting	
	Work area size for GUI	10000
	Horizontal LCD size	240
	Vertical LCD size	320
	Color depth	16 bit per pixel
	LCD orientation	ORIENTATION_CCW
	Configurations >> Select LCD Interface	
	LCD interface	LCD_IF_RSPI
	Configurations >> Select LCD Interface >> SPI Interface Setting	
	LCD interface channel number	1
	Select LCD Driver IC	LCD_DRV_IC_ILI9341
	Communication baud rate of LCD interface	30000000
	Use or unused display cache	Unuse: Unchecked.
	Configurations >> Select LCD Interface >> LCD Interface Pin Setting	
	Use Display Signal Pin	Use Display Signal Pin
	Display Signal Pin	GPIO_PORT_A_PIN_1
	Use Backlight Pin	Use Backlight Pin
	Backlight Pin	GPIO_PORT_D_PIN_6
	Use Data/Command Pin	Use Data/Command Pin
	Data/Command Pin	GPIO_PORT_A_PIN_2
	Use Chip Select Pin	Use Chip Select Pin
	Chip Select Pin	GPIO_PORT_D_PIN_5
	Configurations >> Select Touch Interface	
	Use Touch function	Not use Touch function: Unchecked.

Table 3-7 Parameters of Smart Configurator (4/6)

Category	Item	Setting/Description
Smart Configurator >> Components >> FreeRTOS_Kernel		Other than the changes listed below, default settings are used.
	The total amount of RAM available in the FreeRTOS heap	(size_t)(200U * 1024U)
	Tick vector	_CMT2_CMI2
Smart Configurator >> Components >> FreeRTOS_Object		Other than the changes listed below, default settings are used.
	Tasks	Initialize: kernel start Task Code: touch_task Task Name: touch_task Stack Size: 512 Task Handler: NULL Parameter: NULL Priority: 1 Initialize: kernel start Task Code: emwin_task Task Name: emwin_task Stack Size: 512 Task Handler: NULL Parameter: NULL Priority: 1
Smart Configurator >> Components >> AWS_device_shadow		Default settings are used.
Smart Configurator >> Components >> AWS_ggd		Default settings are used.
Smart Configurator >> Components >> AWS_mqtt		Default settings are used.
Smart Configurator >> Components >> AWS_secure_soket		Default settings are used.
Smart Configurator >> Components >> AWS_tcp_ip		Default settings are used.

Table 3-8 Parameters of Smart Configurator (5/6)

Category	Item	Setting/Description
Smart Configurator >> Pins >> Serial Communication Interface >> SCI2		Uncheck all settings except the following
	RXD2	Use: Checked. Terminal Assignment: Set P12
	TXD2	Use: Checked. Terminal Assignment: Set P13
Smart Configurator >> Pins >> Serial Communication Interface >> SCI3		Uncheck all settings except the following
	RXD3	Use: Checked. Terminal Assignment: Set P16
	TXD3	Use: Checked. Terminal Assignment: Set P17
Smart Configurator >> Pins >> Serial Communication Interface >> SCI5		Uncheck all settings except the following
	SCK5	Use: Checked. Terminal Assignment: Set PA1
	SMISO5	Use: Checked. Terminal Assignment: Set PA2
	SMOSI5	Use: Checked. Terminal Assignment: Set PA4
Smart Configurator >> Pins >> Serial Communication Interface >> RSP11		Uncheck all settings except the following
	MISOB	Use: Checked. Terminal Assignment: Set PE7
	MOSIB	Use: Checked. Terminal Assignment: Set PE6
	RSPCKB	Use: Checked. Terminal Assignment: Set P27

Table 3-9 Parameters of Smart Configurator (6/6)

Category	Item	Setting/Description
Smart Configurator >> Components >> Config_PORT		Other than the changes listed below, default settings are used.
	PORT4	Checked.
	P40	Output: Checked Output 1: Checked
	P41	Output: Checked Output 1: Checked
	P42	Output: Checked Output 1: Checked
	P43	Output: Checked Output 1: Checked
	PORTD	Checked.
	PD2	Output: Checked Output 1: Checked
	PD3	Output: Checked Output 1: Checked
Smart Configurator >> Components >> Config_TPU5		Other than the changes listed below, default settings are used.
	Counter clear source	TGRB5 compare match
	Counter clock selection	PCLK/64, rising edge
	TIOCA5 pin	Output initial 0, 1 at compare match
	TGRB compare match operation	Output 0 from TIOCA5 pin
	PWM cycle	504μs
	TGRA initial value	38
	TGRB initial value	472

3.4.4 File Structure

The following shows file structure by sample program.

Table 3-10 File Structure

Folder name, File name	Outline
application_code	-
└ LCD	-
├ Resource	Folders for images and fonts
└ Source	-
├ LCD_custom_func.c	Source file for LCD related
└ LCD_custom_func.h	Header file for LCD related
renesas_code	-
├ frtos_startup	Generated folder for Amazon FreeRTOS
└ utility	
├ main_task.c	Amazon FreeRTOS main task
└ frtos_skeleton	-
├ emwin_task.c	Task for emWin control
├ task_function.h	Include file for emwin_task.c, touch_task.c
└ touch_task.c	Task for touch control
touch	-
├ touch_func.c	Source file for touch related
└ touch_func.h	Header file for touch related
qe_gen	Generated folder for QE for capacitive touch
└ main.c	Source file for main processing
config_files	Generated folder for Amazon FreeRTOS
demos	
freertos_kernel	
libraries	
QE-Touch	
vendors	Generated folder for Amazon FreeRTOS
└ renesas	-
└ boards	-
└ rx671-rsk	-
└ aws_demos	-
└ src	-
└ smc_gen	Smart Configurator generation
├ Config_PORT	
├ Config_TPU5	
├ general	
├ r_cmt_rx	
├ r_config	
├ r_ctsu_qe	
├ r_dmaca_rx	
├ r_emwin_rx	
├ r_gpio_rx	
├ r_pincfg	
├ r_rspi_rx	
└ rm_touch_qe	

3.4.5 Variables

The following shows the variables that are used in this sample program.

Table 3-11 List of variables used in the sample code

Variable name	Type	Contents
g_sleep_flg	uint8_t	Flag indicating LCD sleep state
g_lcd_left_slide_flg	uint8_t	Flag indicating that touch slider is slid to the left
g_lcd_right_slide_flg	uint8_t	Flag indicating that touch slider is slid to the right
g_lcd_push_enter_flg	uint8_t	Flag indicating that "2" button was touched.
g_lcd_push_back_flg	uint8_t	Flag indicating that "1" button was touched.
g_screen_en_flg	uint8_t	Flag indicating initial screen status
s_flg_countdown	uint8_t	The countdown is in progress on the LCD flag
s_flg_touch	uint8_t	Touch buttons status
s_startup_cnt	uint8_t	Counter for initial screen display time management
s_sleep_cnt	uint16_t	Counter for no-operation time management
s_mode_num	uint8_t	Mode status
s_setting_target	uint8_t	Flags indicating screen status

3.4.6 Constants

The following shows the constants that are used in this sample program.

Table 3-12 List of constants used in the sample code

Constant Name	Setting Value	Contents
LCD_BACKLIGHT	(PORT7.PODR.BIT.B1)	Pin to control LCD backlight
OFF	(0U)	Value at backlight off
ON	(1U)	Value at backlight on
TOUCH_NO	(0U)	Value at no-operation
TOUCH_LEFT_SLIDE	(4U)	Value indicating that touch slider is slid to the left
TOUCH_RIGHT_SLIDE	(3U)	Value indicating that touch slider is slid to the right
TOUCH_SELECT	(1U)	Value indicating that "2" button was touched
TOUCH_HOME	(2U)	Value at moving to the previous screen
SLEEP_COUNT	(SLEEP_TIME / DELAY_TIME)	When the counter in the program equals this value, the LCD is turned off
MODE_RECIPE_DETAIL	(6U)	Value of detail setting in Recipe mode
MODE_COOK_DETAIL	(3U)	Value of detail setting in Cook mode
MODE_DEFROST_DETAIL	(4U)	Value of detail setting in Defrost mode
MODE_COOK	(1U)	Value of start cooking in Cook mode
MODE_DEFROST	(2U)	Value of start cooking in Defrost mode
MODE_RECIPE	(5U)	Value of start cooking in Recipe mode
TOUCH_START	(5U)	Value of execution in each mode
SETTING_TOP	(0U)	Value of initial screen
MODE_MENU	(0U)	Value of mode not selected
LED_HOME	(PORT4.PODR.BIT.B0)	P40
LED_SELECT	(PORT4.PODR.BIT.B1)	P41
LED_START	(PORT4.PODR.BIT.B2)	P42
LED_MINUS	(PORT4.PODR.BIT.B3)	P43
LED_BAR	(PORTD.PODR.BIT.B3)	PD3
LED_PLUS	(PORTD.PODR.BIT.B2)	PD2
LED_ON	(1U)	Value of LED turning on
LED_OFF	(0U)	Value of LED turning off
APP_VERSION_MAJOR	(1U)	Version display
STARTUP_COUNT	(STARTUP_TIME / DELAY_TIME)	Display the initial screen until the counter in the program equals this value

3.4.7 Functions

The following shows the functions that are used in this sample program.

Table 3-13 List of functions used in the sample code

Function name	Outline
emwin_task	LCD Control
GUI_Init	Initializing emWin
screen_init	Menu screen is displayed on LCD
change_screen	LCD screen update
slide_func	Processing at touch slider operation
select_pushed_func	Processing when "select" button is touched
home_pushed_func	Processing when "home" button is touched
start_pushed_func	Processing when "start" button is touched
countdown_func	Processing the countdown
slide_icons	Processing of cursor movement on menu screens and mode selection screens for Cook, Defrost and Recipe
setting_cook	Setting the number of watts and seconds in Cook mode
setting_defrost	Setting the level of defrosting and the number of grams in Defrost mode
setting_recipe	Setting the number of cupcakes in Recipe mode
mode_select_enter	Change the mode and display the LCD screen according to the mode
change_target_cook	Change the setting target of the detail setting screen in Cook mode
change_target_defrost	Change the setting target of the detail setting screen in Defrost mode
mode_change_menu	Move to the menu screen
start_cook	Start cooking in Cook mode
start_defrost	Start defrosting in Defrost mode
start_recipe	Start cooking in Recipe mode
countdown_cook	Processing during cooking in Cook mode
countdown_defrost	Processing during defrosting in Defrost mode
countdown_recipe	Processing during cooking in Recipe mode
touch_task	Initializes CTSU and calls the touch judgement function
touch_judge	Touch judgement
show_startup_screen	Processing of startup screen display
led_sleep_on	Set LED pattern to sleep
wait_5sec_once	Processing of 5 seconds wait
clear_touch_flags	Processing of flag clear for touch
draw_choices_v09	Processing of version 0.90 display
draw_choices	Processing of version 1.00 display
cnt_1s	Processing of 1 second count
end_show_comp	Processing of cooking completion screen wait
show_comp	Processing of cooking completion screen display
start_cook_detail	Start of detail setting in Cook mode
start_defrost_detail	Start of detail setting in Defrost mode
start_recipe_detail	Start of detail setting in Recipe mode
led_off	Processing of LED turning off

3.4.8 Function Specifications

The following shows function specifications that are used in this sample program.

[Function name] emwin_task

Outline	LCD Control
Header	task_function.h
Declaration	void touch_task (void * pvParameters)
Description	Initializes emWin FIT and controls LCD.
Arguments	pvParameters
Return value	None
Remarks	None

[Function name] GUI_Init

Outline	Initializing emWin
Header	GUI.h
Declaration	void GUI_Init (void)
Description	Initializes emWin's internal data structures and variables.
Arguments	None
Return value	None
Remarks	None

[Function name] screen_init

Outline	Menu screen is displayed on LCD
Header	LCD_custom_func.h
Declaration	void screen_init (void)
Description	Menu screen is displayed on LCD.
Arguments	None
Return value	None
Remarks	None

[Function name] change_screen

Outline	LCD screen update
Header	LCD_custom_func.h
Declaration	void change_screen (void)
Description	Updates the LCD screen by touch operation.
Arguments	None
Return value	None
Remarks	None

[Function name] show_startup_screen

Outline	Processing of startup screen display
Header	LCD_custom_func.h
Declaration	void shoe_startup_screen (void)
Description	Performs startup screen display.
Arguments	None
Return value	None
Remarks	None

[Function name] led_sleep_on

Outline Set LED pattern to sleep
Header LCD_custom_func.h
Declaration Void led_sleep_on (void)
Description Sets LED pattern to sleep
Arguments None
Return value None
Remarks None

[Function name] touch_task

Outline Initializes CTSU and calls the touch judgement function
Header task_function.h
Declaration void touch_task (void * pvParameters)
Description Initializes CTSU and calls the touch judgement function.
Arguments pvParameters
Return value None
Remarks None

[Function name] touch_judge

Outline Touch judgement
Header touch_func.h
Declaration void touch_judge (uint64_t button_status, uint16_t slider_position)
Description Performs touch judgement and sets the judgement result to a flag.
Arguments button_status, slider_position
Return value None
Remarks None

3.4.9 ROM/RAM usage

ROM/RAM usage for this sample program is shown below.

Table 3-14 ROM usage

Size(KByte)	Description
550	Amazon FreeRTOS
200	LCD Graphic data
115	emWin, LCD control
15	demo program, LCD_custom_func
24	Other
Total 904KByte	MAX 1024KByte (88% Used) : 1024KByte x 2Bank

Table 3-15 RAM usage

Size(KByte)	Description
200	OS Heap area
16	Heap area
64	AWS demo program
37	AWS cloud (exp. OTA)
11	emWin
18	Other
Total 356KByte	MAX 384KByte (92.7% Used)

4. Importing a Project

The sample programs are distributed in e² studio project format. This section shows how to import a project into e² studio or CS+. After importing a project, check the build and debug settings.

4.1 Procedure in e² studio

To use sample programs in e² studio, follow the steps below to import them into e² studio. In projects managed by e² studio, do not use space codes, multibyte characters, and symbols such as "\$", "#", "%" in folder names or paths to them.

(Note that depending on the version of e² studio you are using, the interface may appear somewhat different from the screenshots below.)

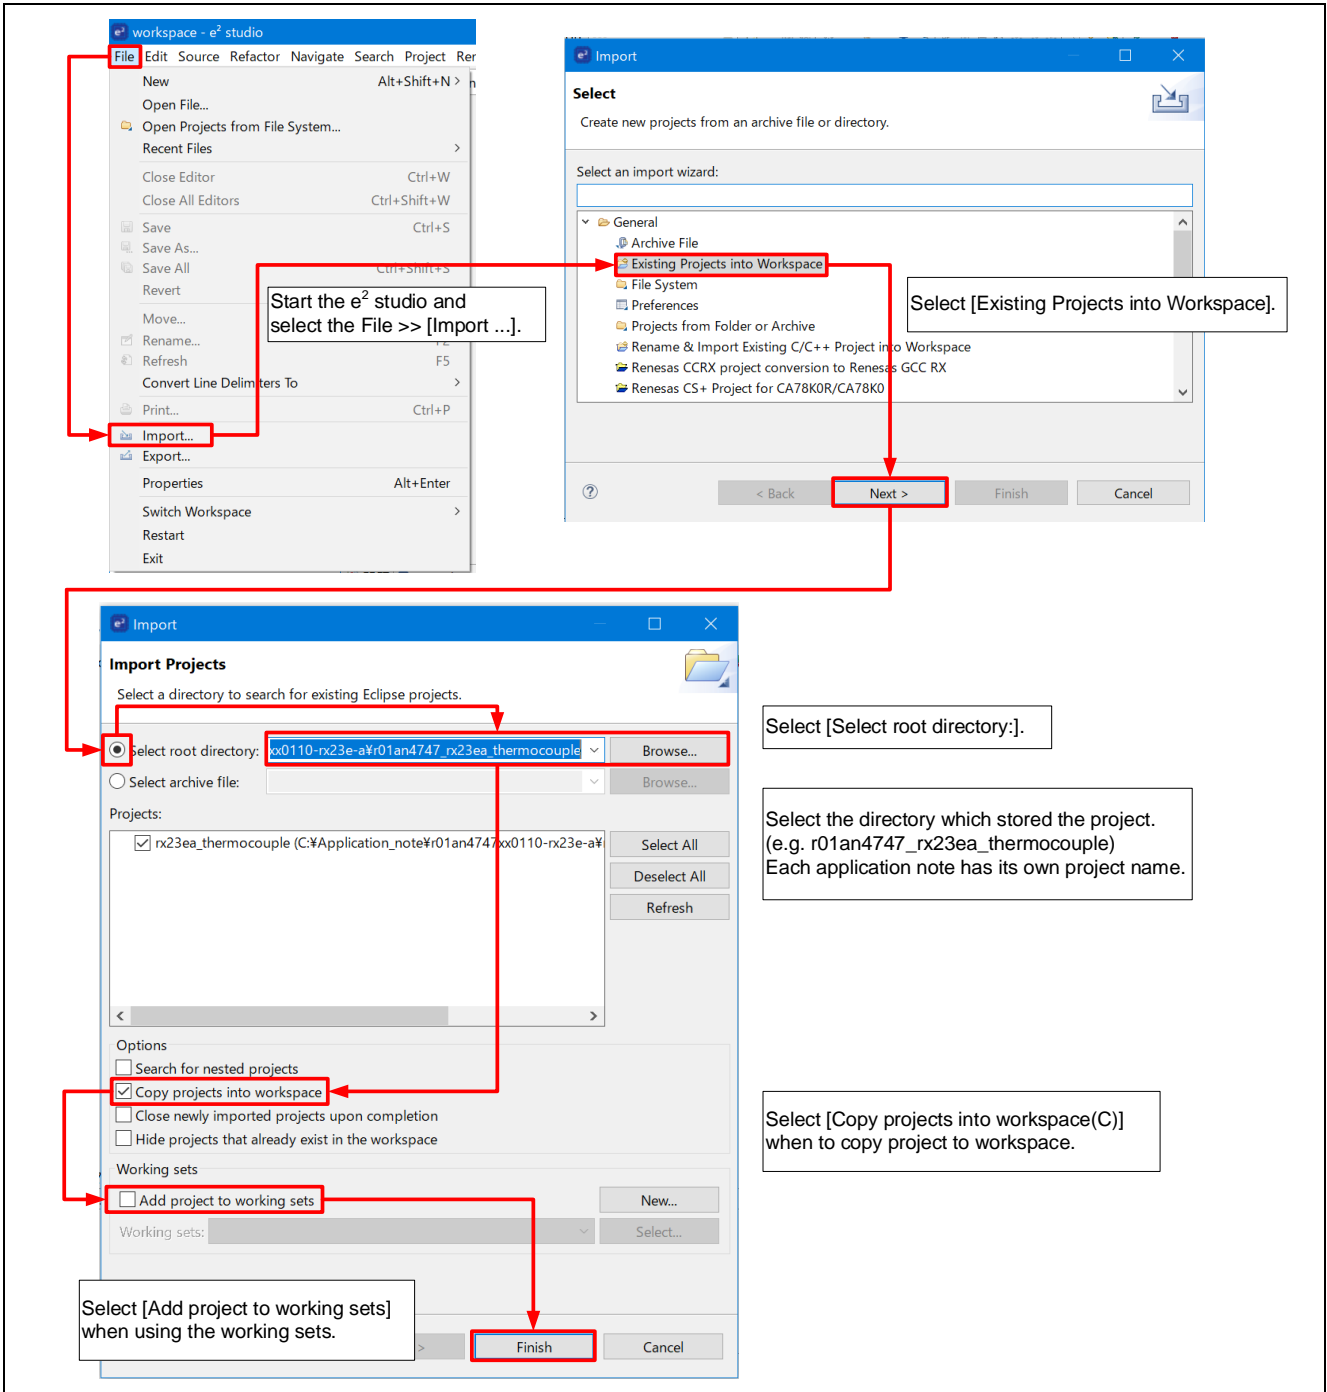


Figure 4-1 Import a Project into e² Studio

4.2 Procedure in CS+

To use sample programs in CS+, follow the steps below to import them into CS+. In projects managed by CS+, do not use space codes, multibyte characters, and symbols such as "\$", "#", "%" in folder names or paths to them.

(Note that depending on the version of CS+ you are using, the interface may appear somewhat different from the screenshots below.)

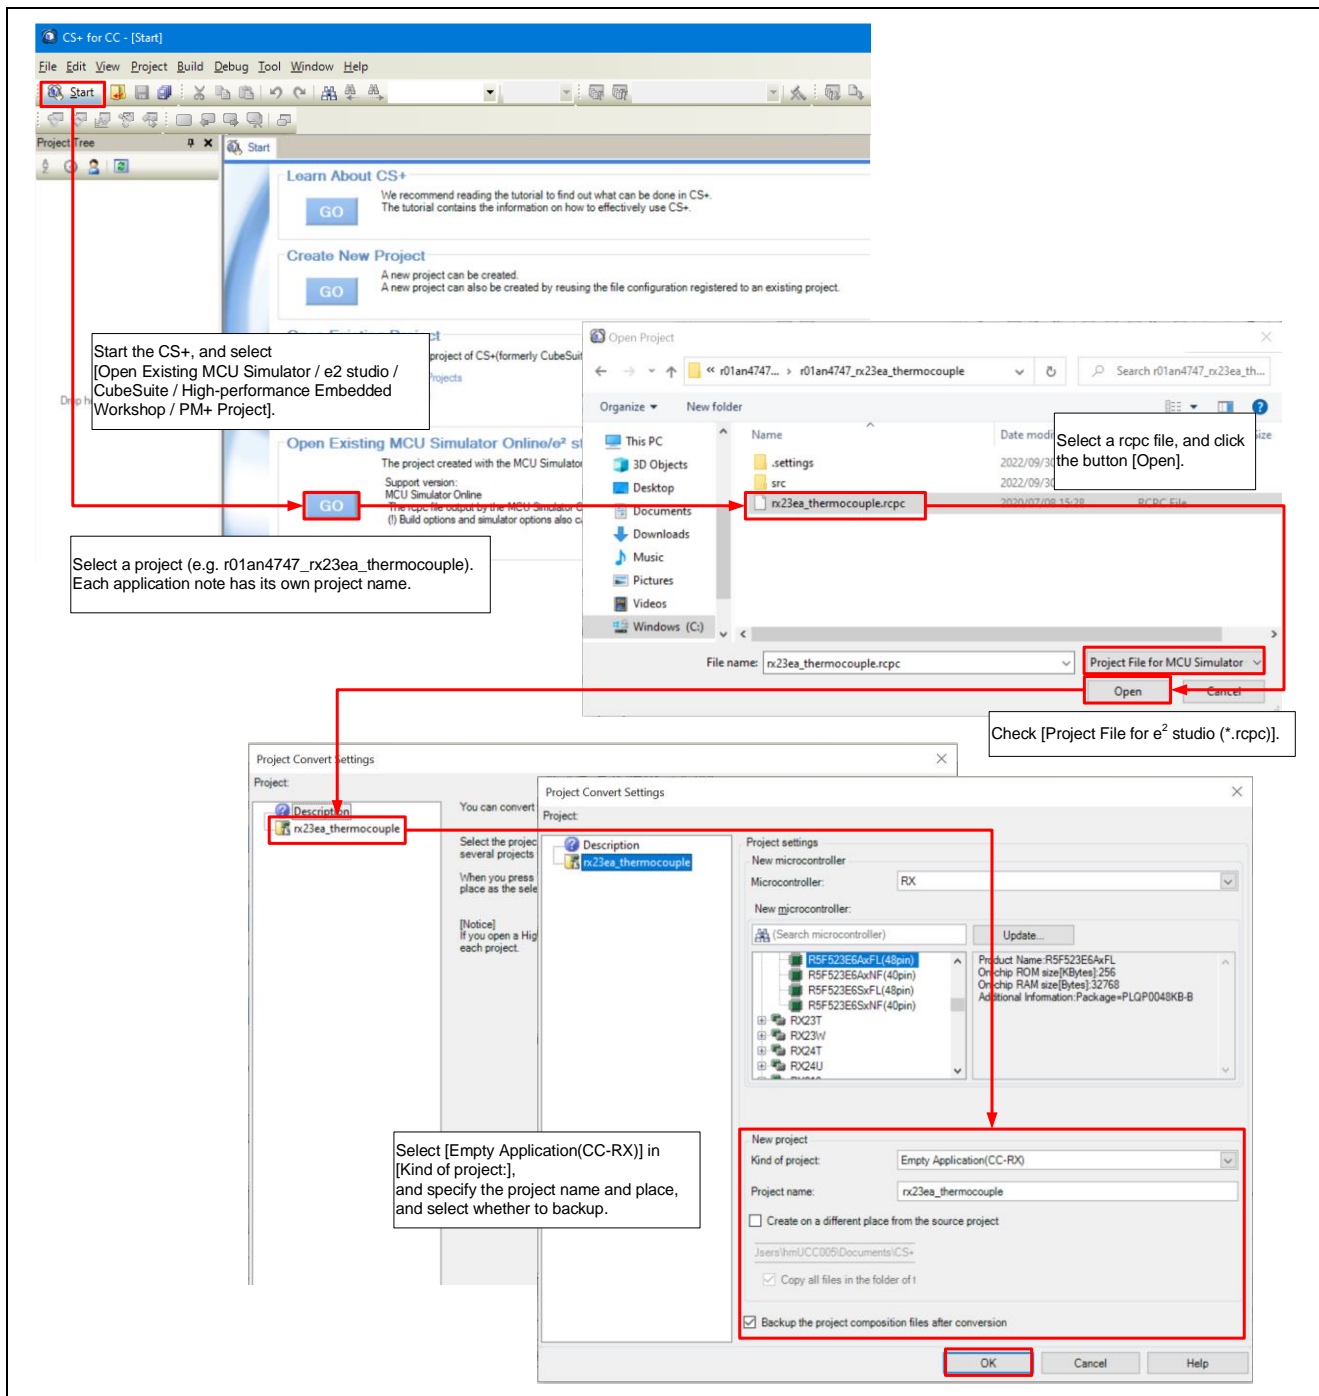


Figure 4-2 Importing a Project into CS+

5. Start Demonstration

Disconnect the E2 Emulator Lite and turn on the RX671 PoC to start the demonstration program. This demonstration program assumes control of the display and settings of a microwave oven. Set the cooking conditions and recipe selections using the touch buttons and touch slider while checking the LCD.

Hereinafter, touch buttons are described as buttons and touch slider is described as slider.

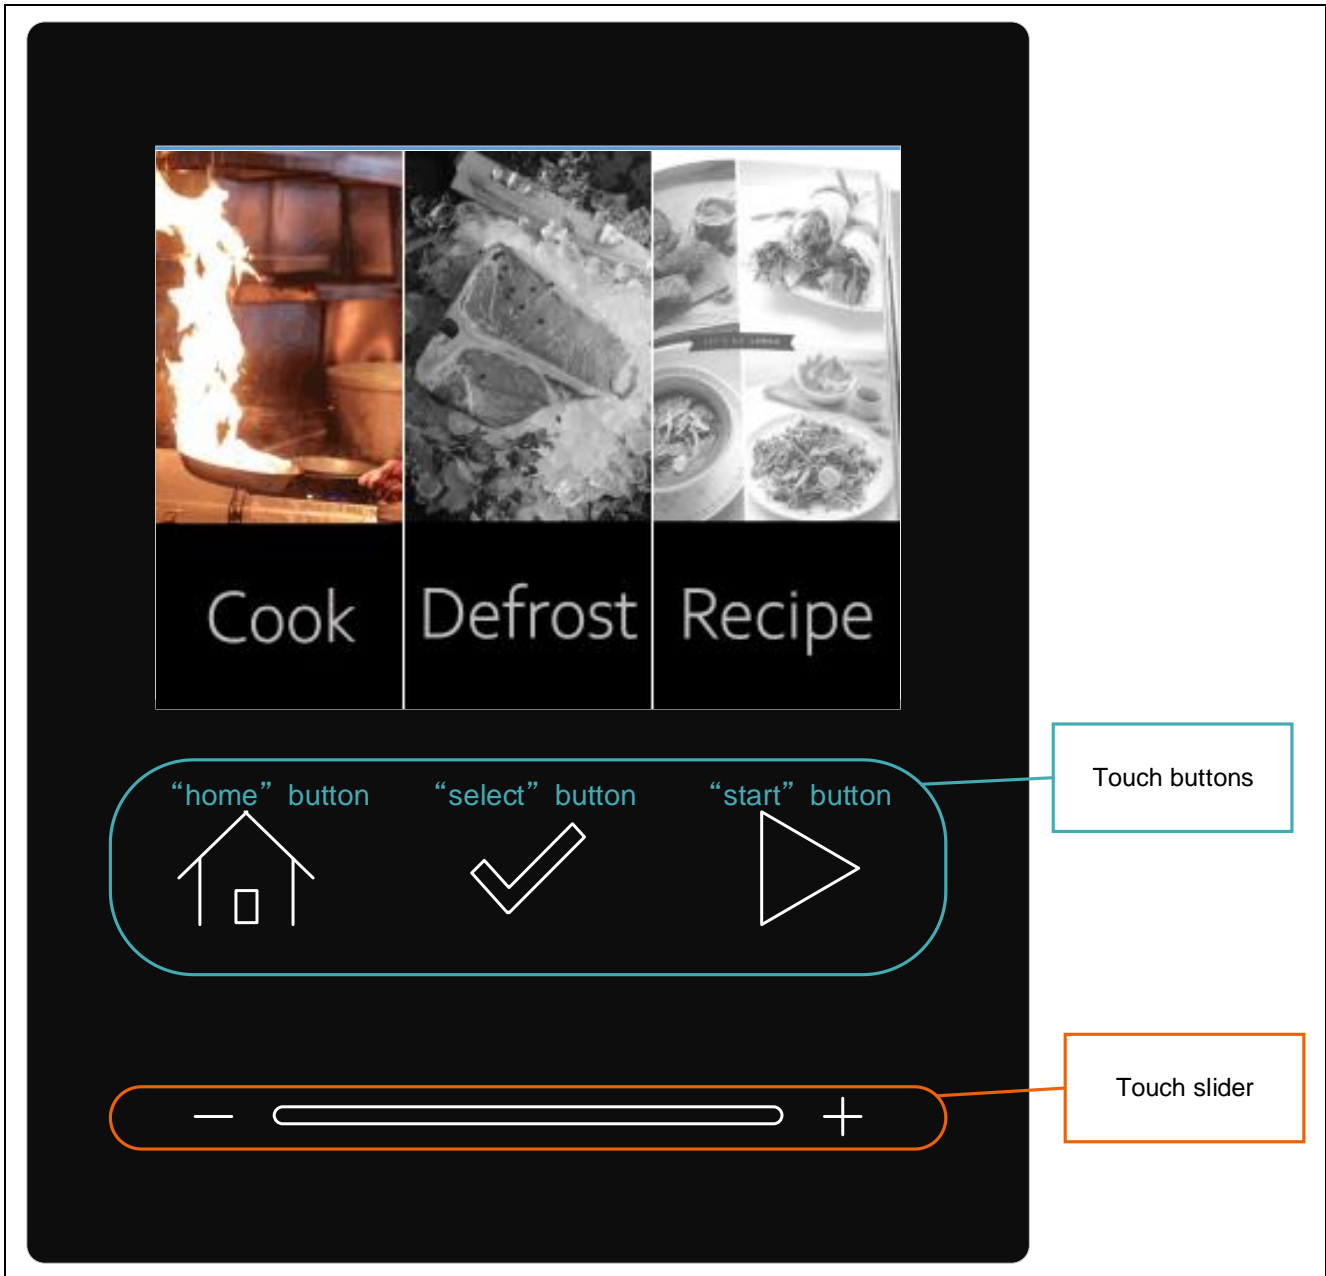


Figure 5-1 Demonstration screen and operation panel

5.1 Powered on RX671 PoC and menu screen

When RX671 PoC is powered on, the LCD panel displays the RX logo and RX671 features (initial screen) for approximately 5 seconds. When the display finishes, the sample program starts and becomes a menu screen.

And while the initial screen is displayed, can immediately move to the menu screen by touching any button.

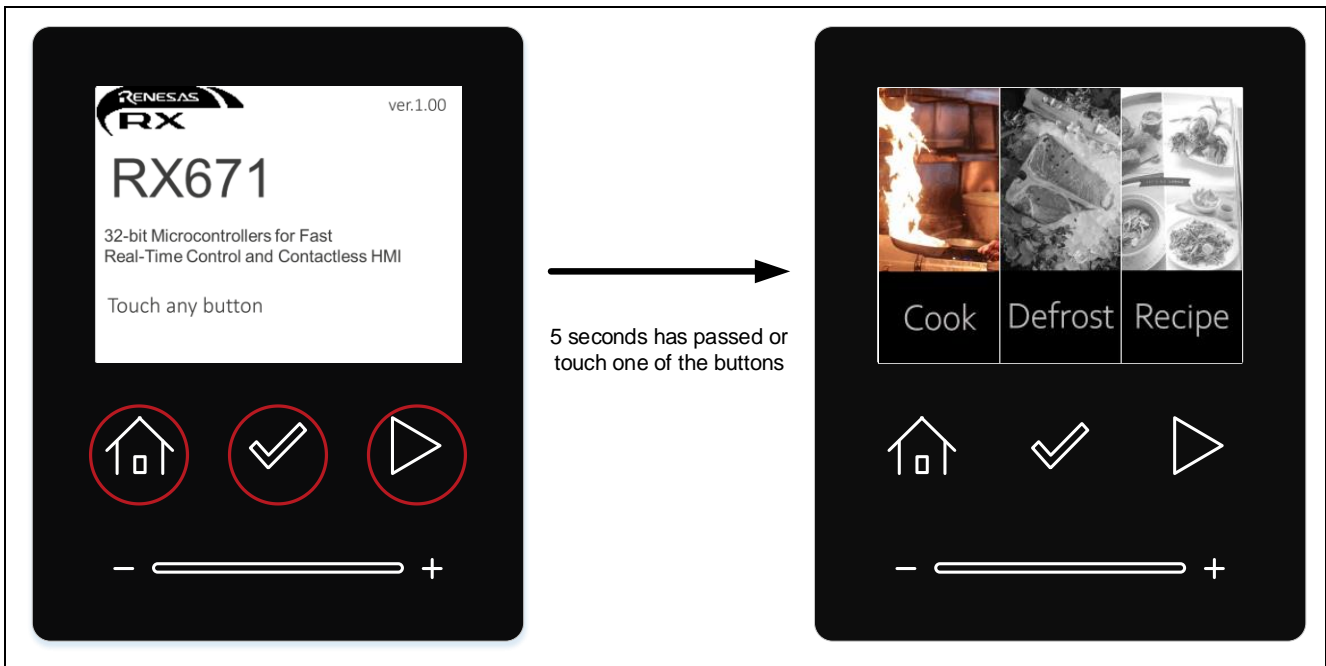


Figure 5-2 Start of the demonstration

5.2 Menu screen

"Cook", "Defrost" or "Recipe" can be selected with the slider operation on the menu screen.

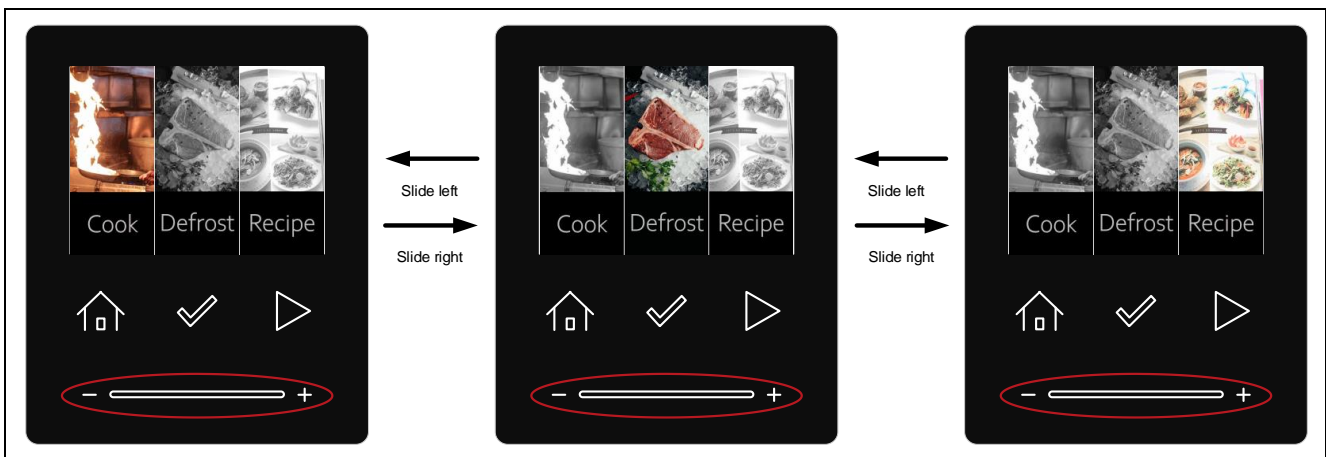


Figure 5-3 How to operate the menu screen

5.3 Cook setting

5.3.1 Move to mode selection screen

While "Cook" is selected on the menu screen, touching the "select" button can move to the Cook mode selection screen.

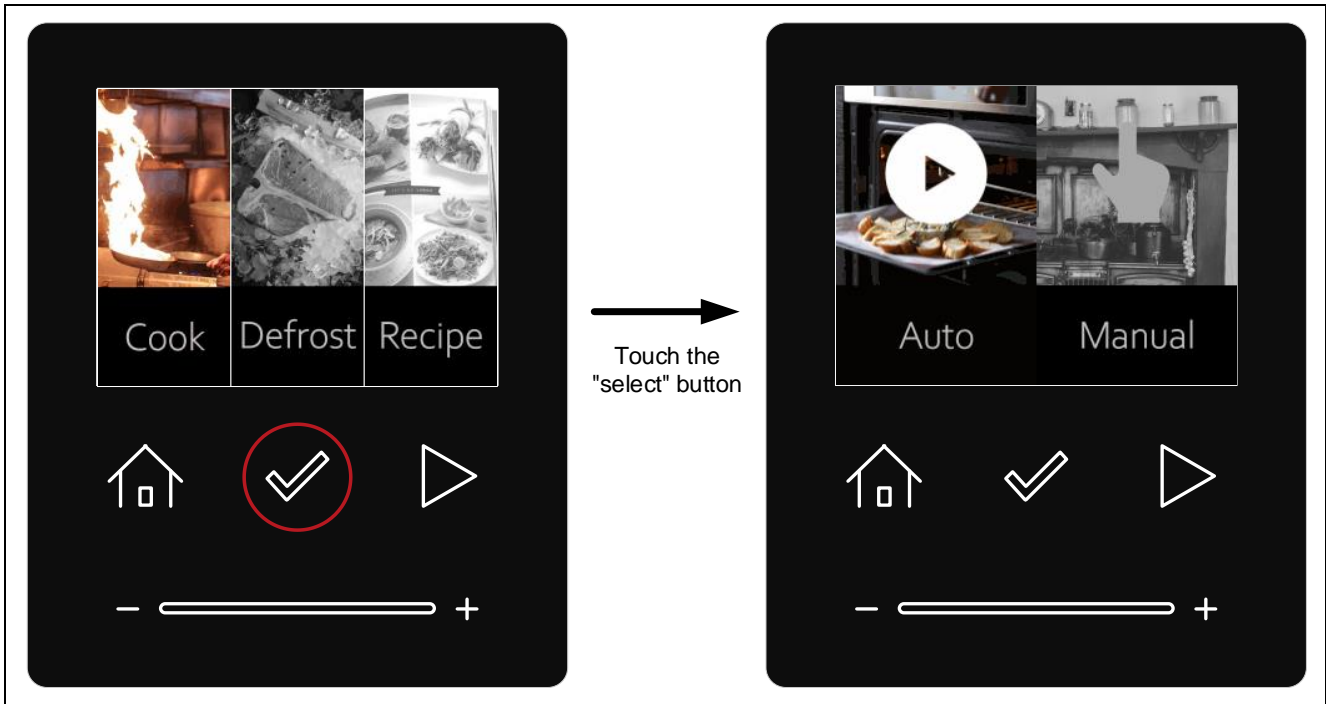


Figure 5-4 Move to the Cook mode selection screen

5.3.2 Select mode

While the Cook mode selection screen is displayed, "Auto" or "Manual" can be selected with the slider operation.

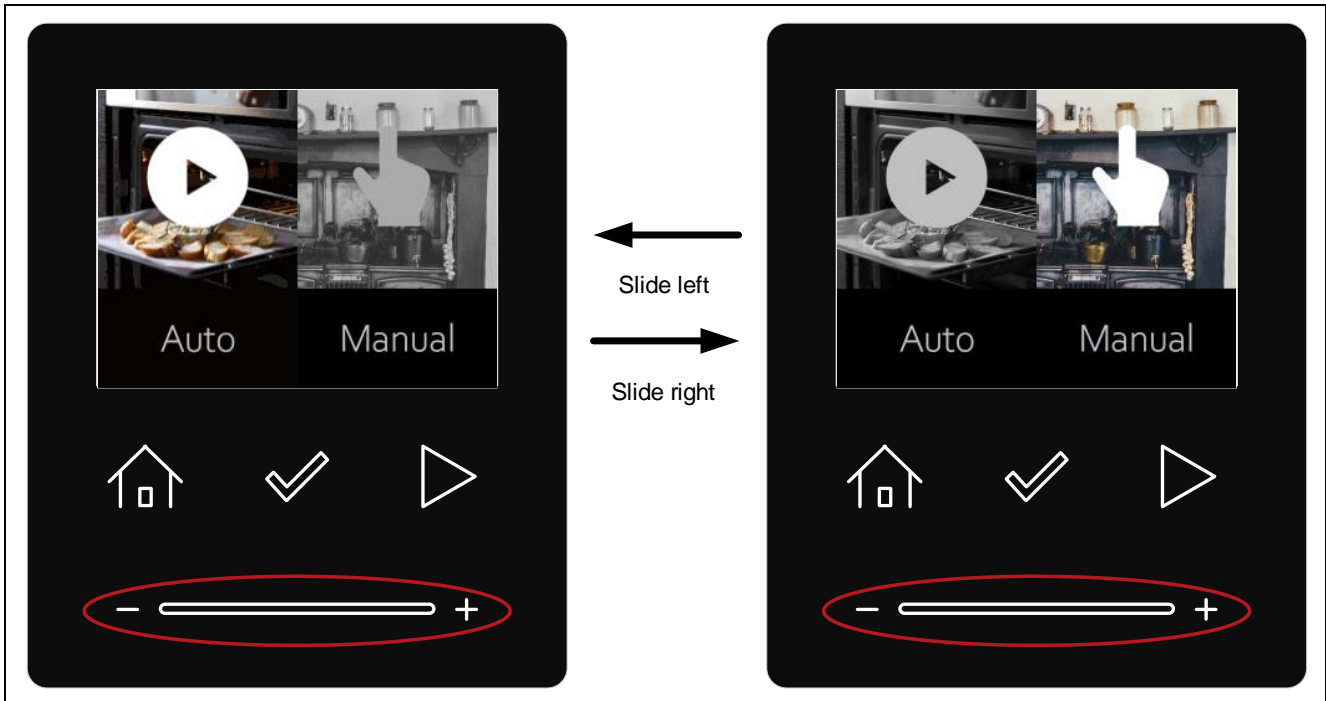


Figure 5-5 How to operate the Cook mode selection screen

5.3.3 Select Auto

While "Auto" is selected on the Cook mode selection screen, touching the "start" button can start cooking.

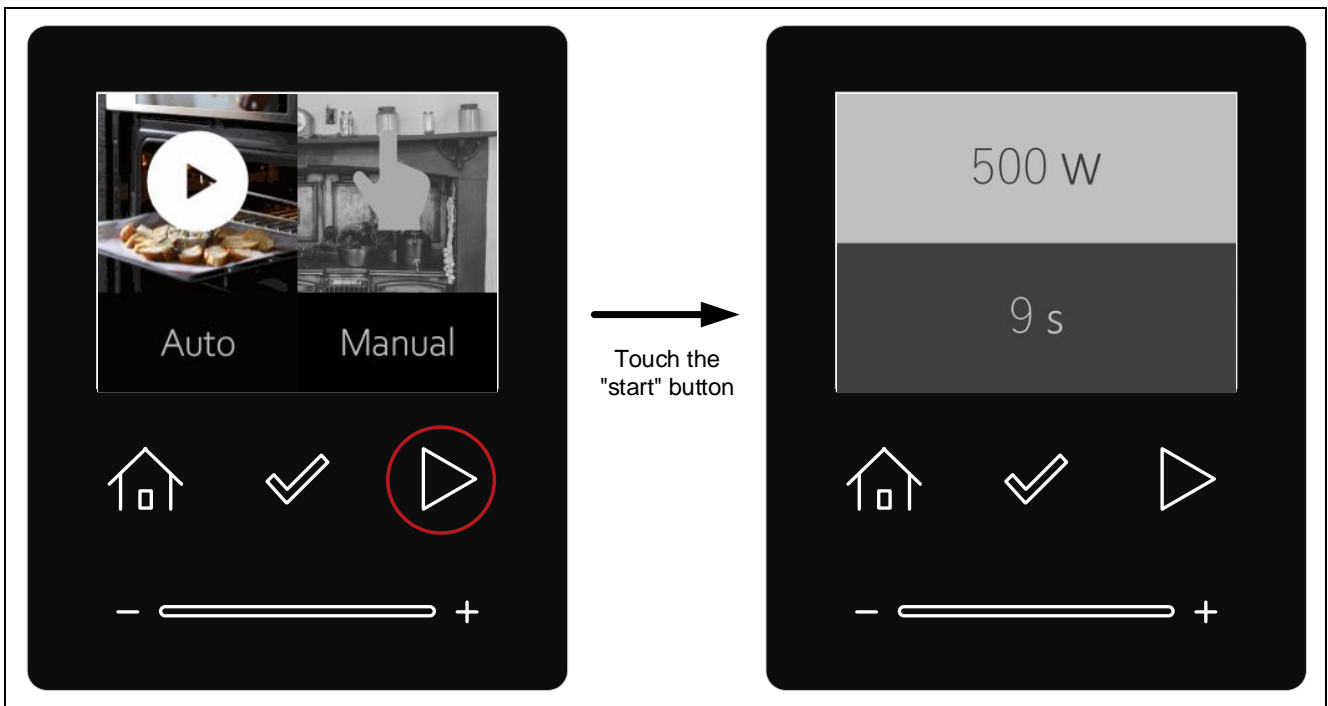


Figure 5-6 Start cooking in Auto mode

5.3.4 Select Manual

While "Manual" is selected on the Cook mode selection screen, touching the "select" button can move to the Cook detail setting screen.

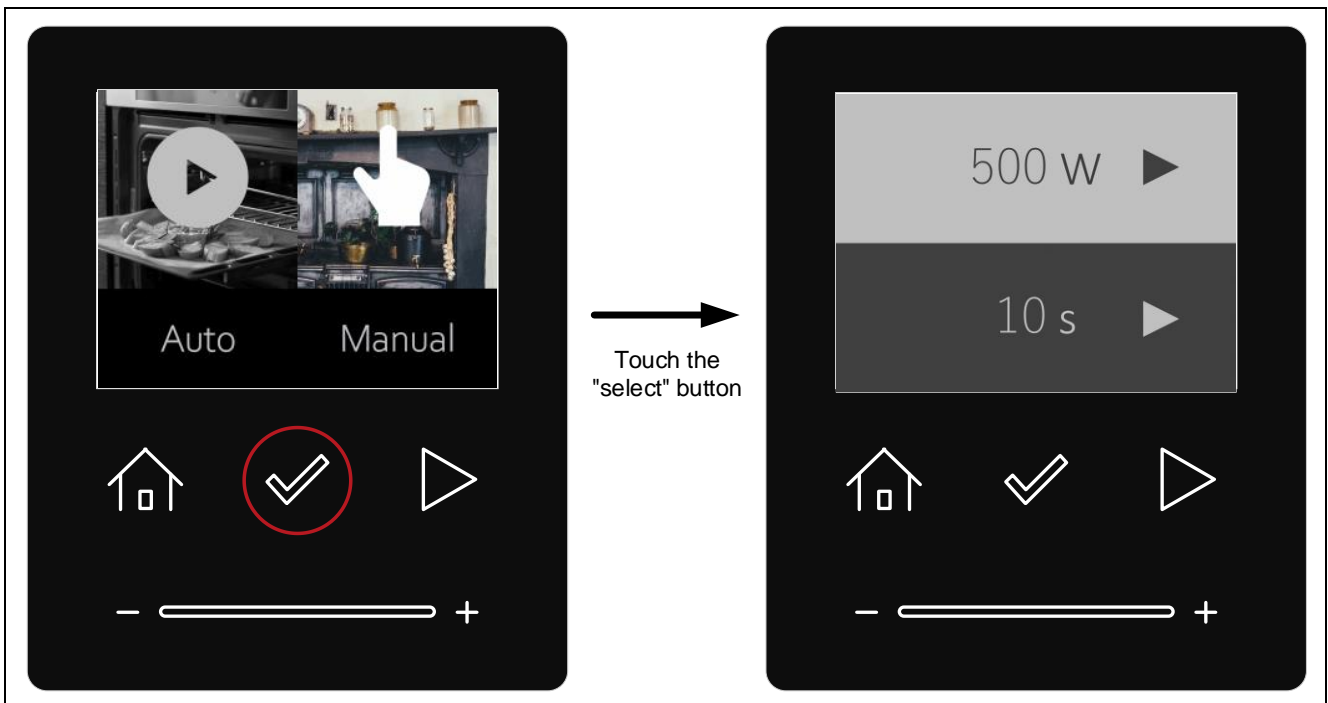


Figure 5-7 Move to the Cook detail setting screen

5.3.4.1 Set the number of watts

While the cursor is on the upper side, the number of watts can be set with the slider. "500W", "600W" and "700W" can be selected as the power level.

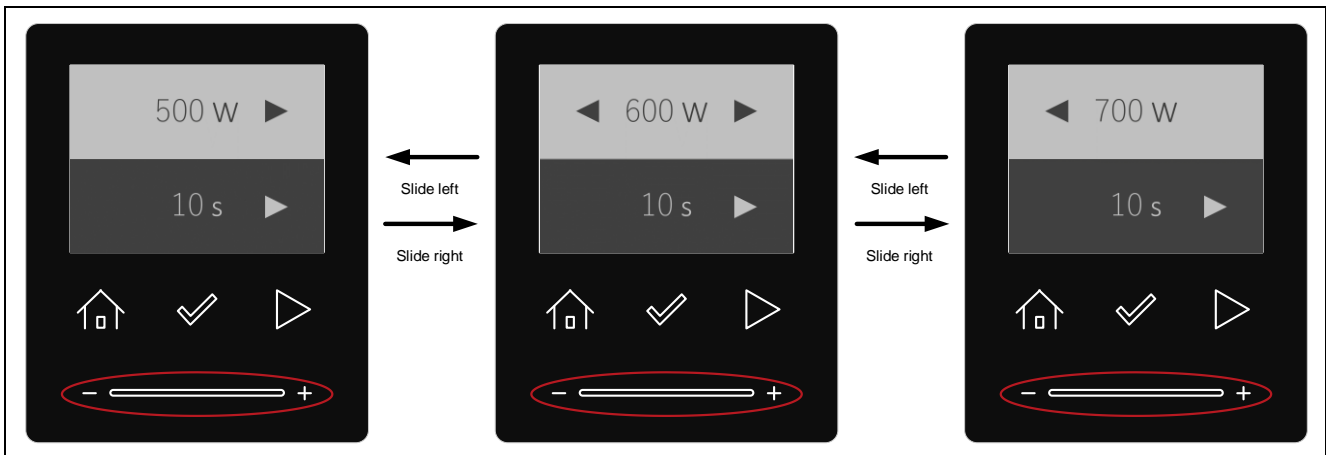


Figure 5-8 Setting the number of watts

5.3.4.2 Move the cursor

While the Cook detail setting screen is displayed, touching the "select" button can move the cursor. The item with a light-colored background is selected.

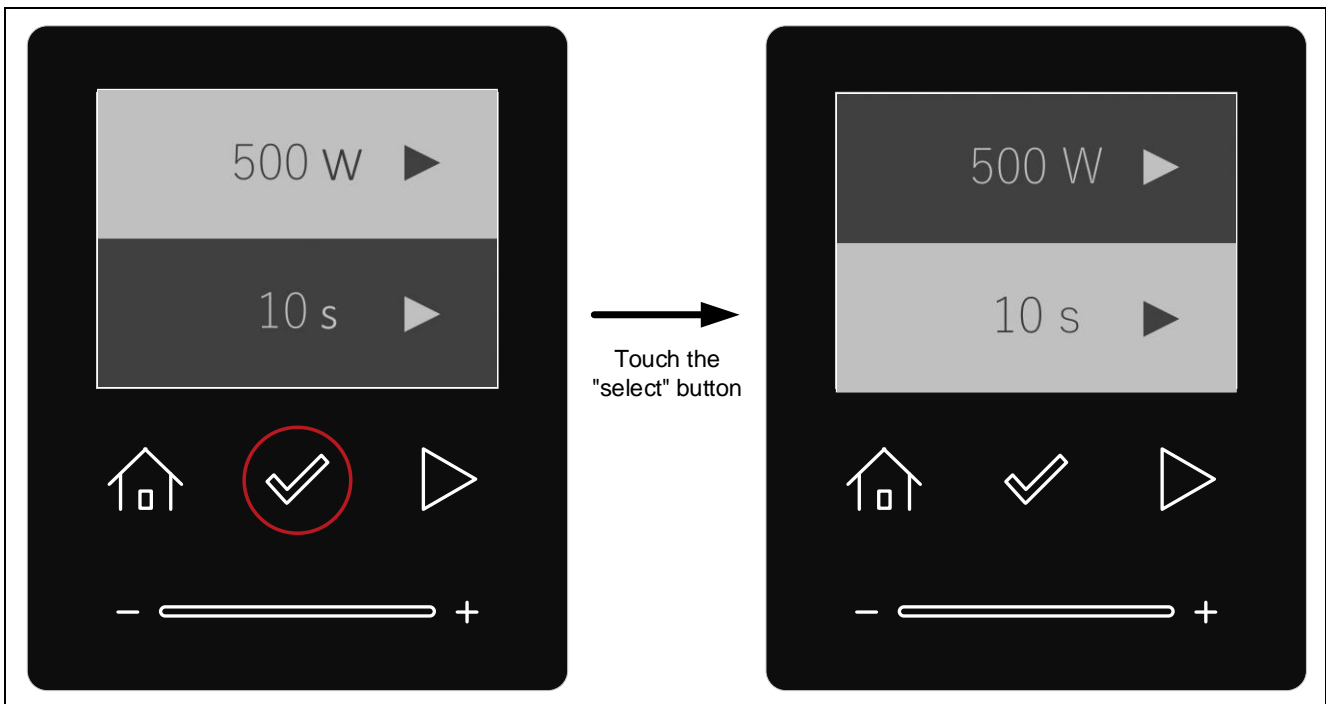


Figure 5-9 How to operate the cursor on the Cook detail setting screen

5.3.4.3 Set the number of seconds

While the cursor is on the lower side, the number of seconds can be set with the slider. "10s", "20s" and "30s" can be selected as the cooking time.

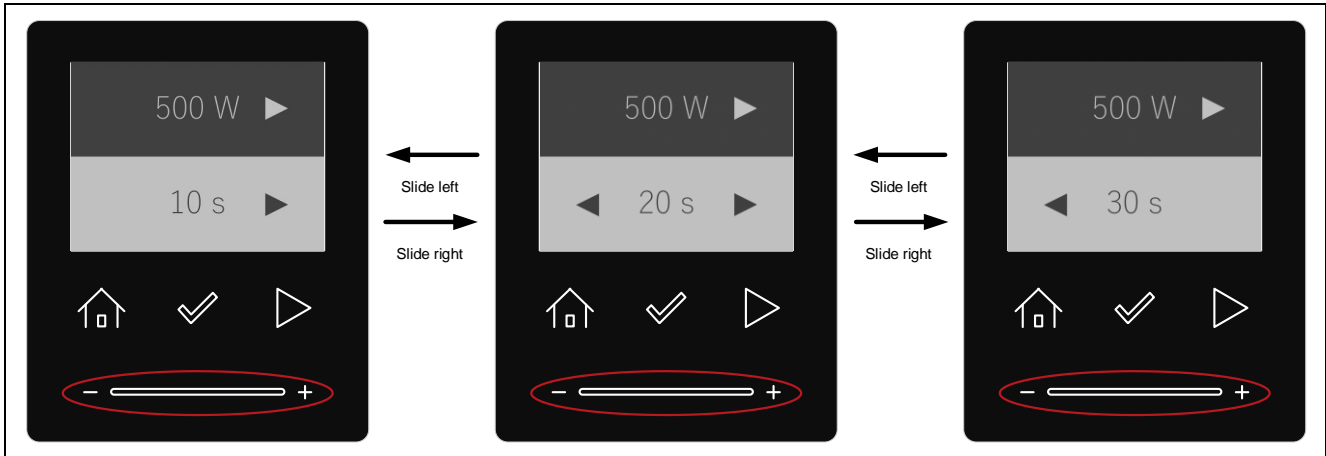


Figure 5-10 Setting the number of seconds

5.3.4.4 Start cooking

While the Cook detail setting screen is displayed and the cursor is on the lower side, touching the "start" button can start cooking.

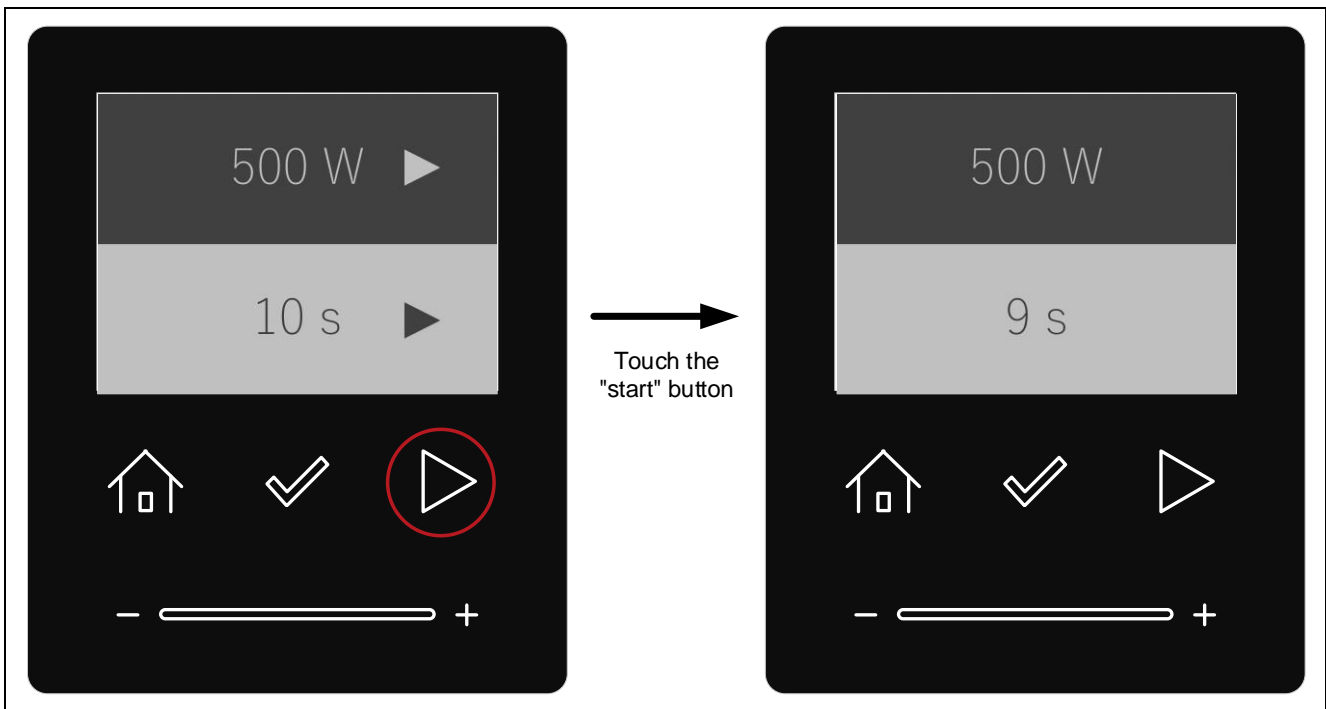


Figure 5-11 Start cooking in Manual mode

5.4 Defrost setting

5.4.1 Move to mode selection screen

While "Defrost" is selected on the menu screen, touching the "select" button can move to the Defrost mode selection screen.

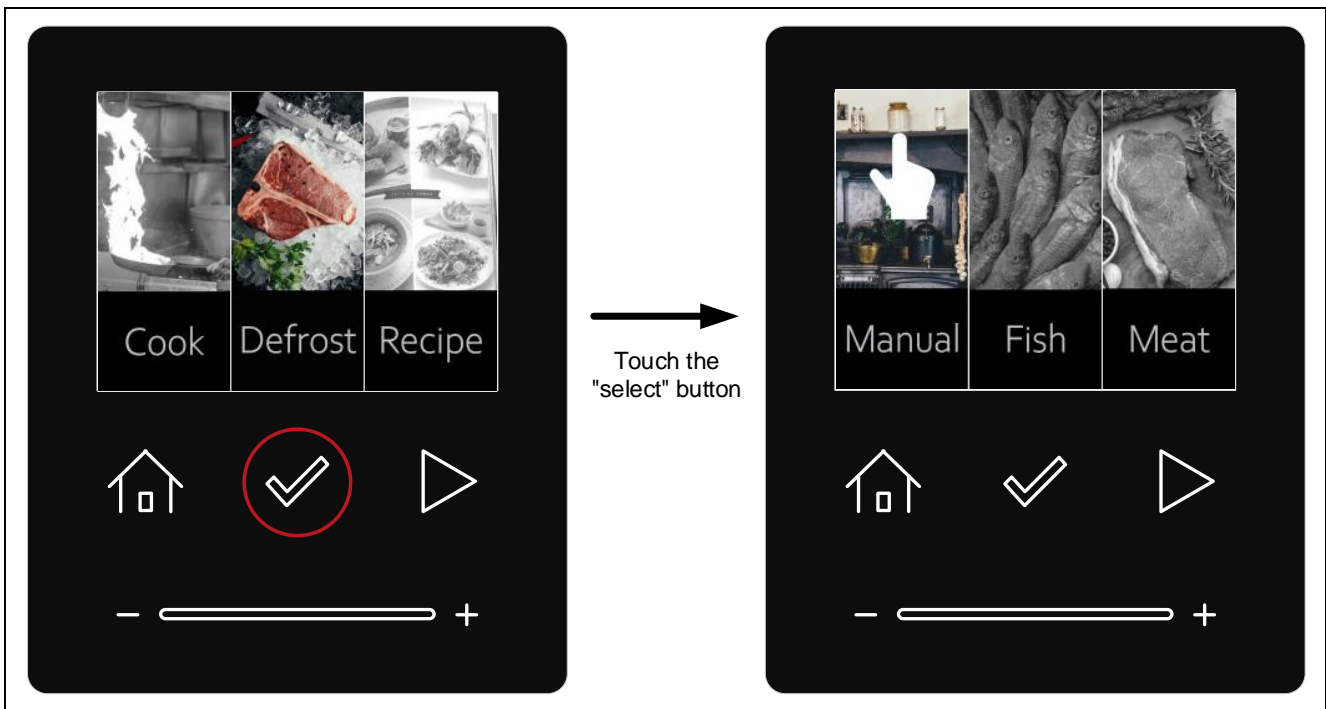


Figure 5-12 Move to the Defrost mode selection screen

5.4.2 Select mode

While the Defrost mode selection screen is displayed, "Manual", "Fish" or "Meat" can be selected with the slider operation.

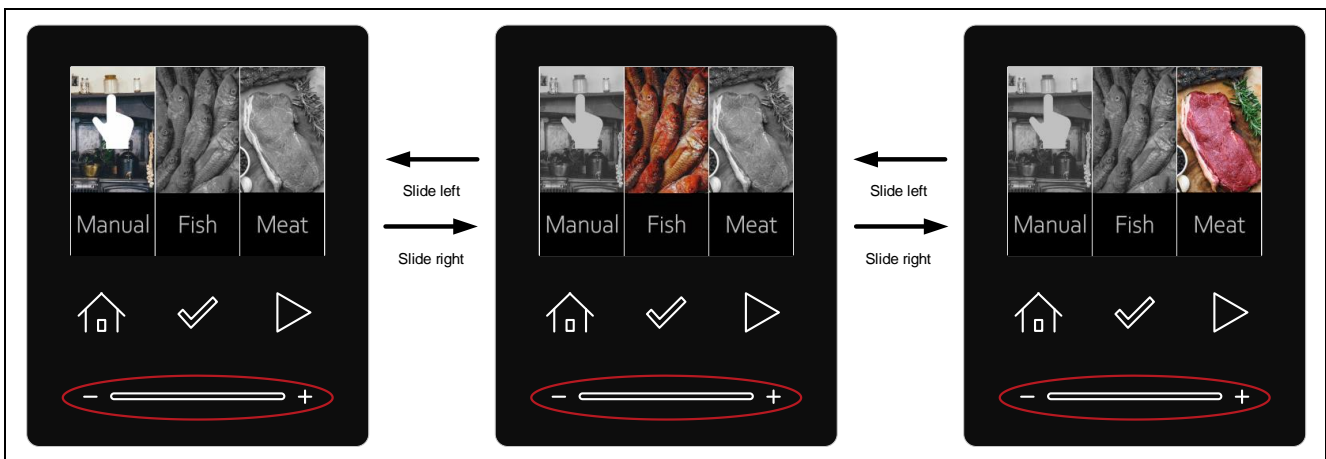


Figure 5-13 How to operate the Defrost mode selection screen

5.4.3 Select Manual

While "Manual" is selected on the Defrost mode selection screen, touching the "select" button can move to the Defrost detail setting screen.

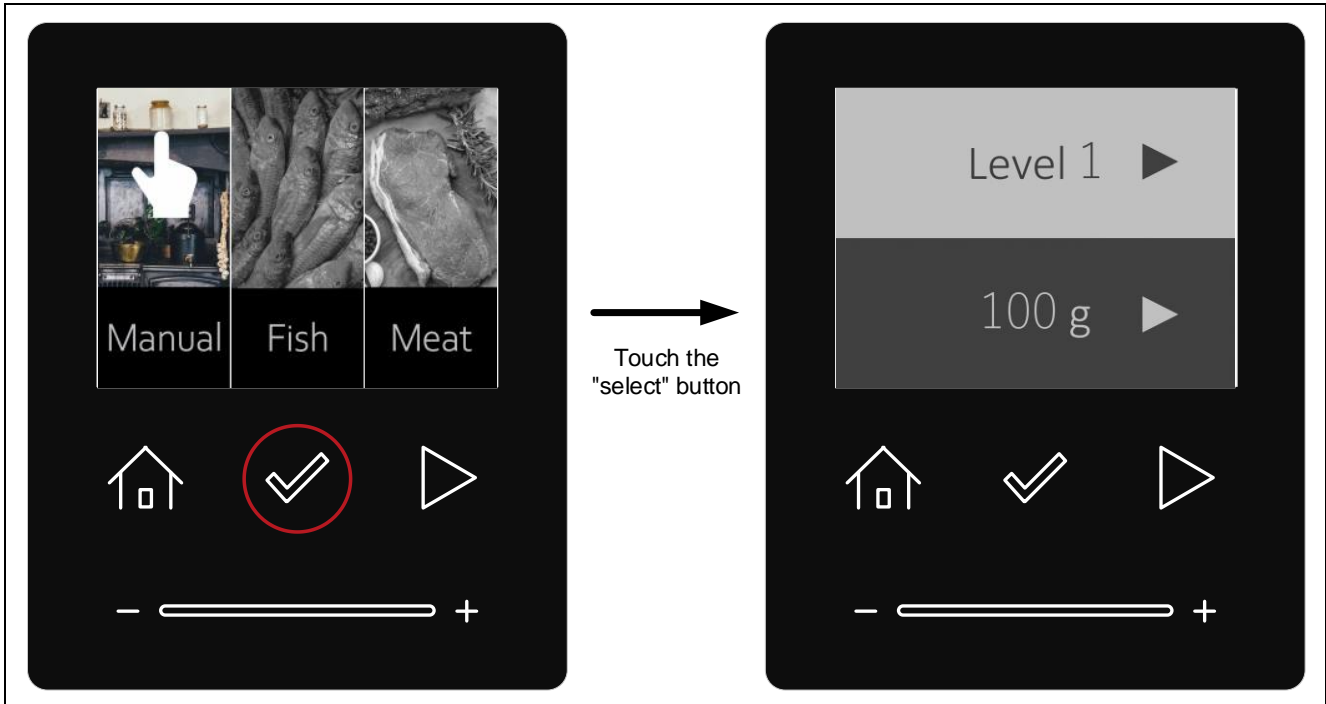


Figure 5-14 Move to the Defrost detail setting screen

5.4.3.1 Set the level of defrosting

While the cursor is on the upper side, the level of defrosting can be set with the slider. "Level1", "Level2" and "Level3" can be selected as the defrosting level.

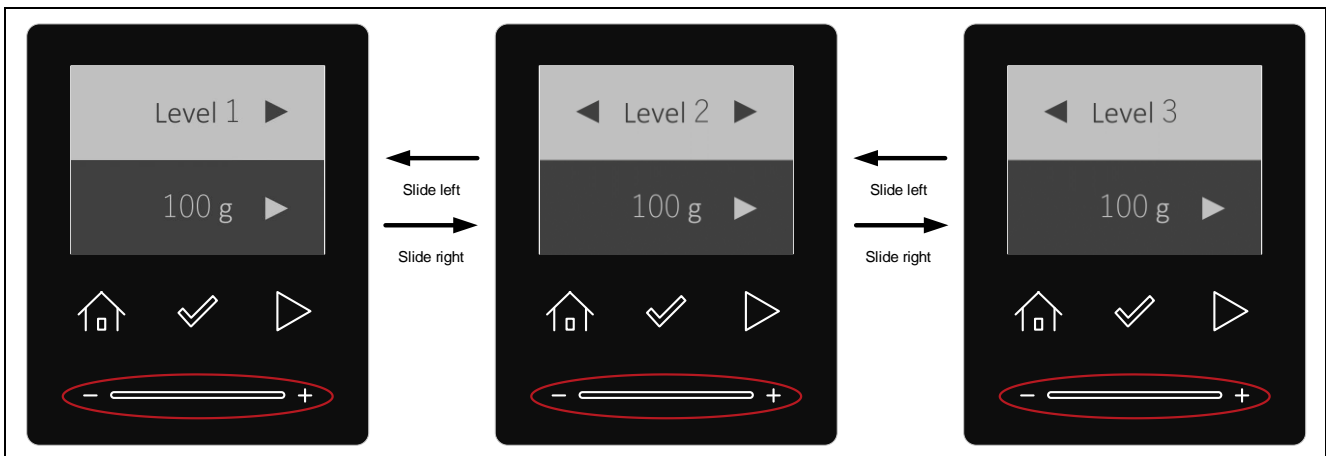


Figure 5-15 Setting the level of defrosting

5.4.3.2 Move the cursor

While the Defrost detail setting screen is displayed, touching the "select" button can move the cursor. The item with a light-colored background is selected.

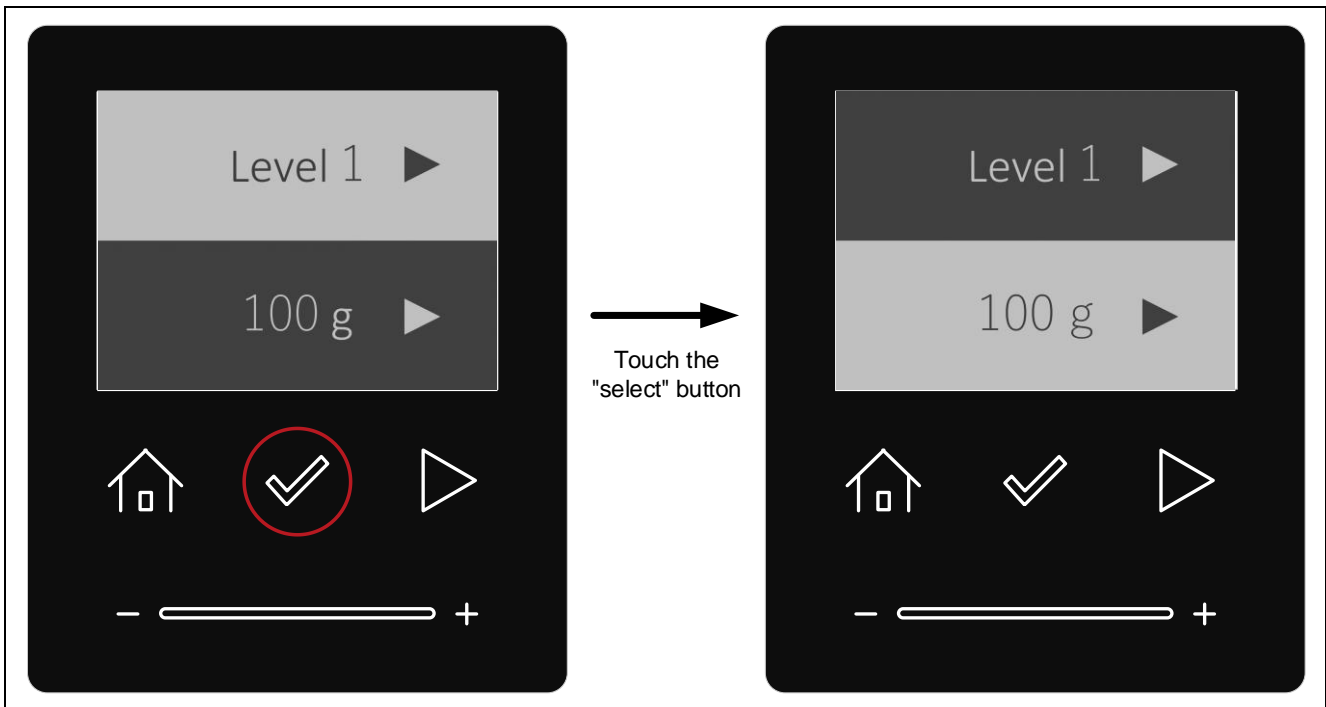


Figure 5-16 How to operate the cursor on the Defrost detail setting screen

5.4.3.3 Set the number of grams

While the cursor is on the lower side, the number of grams can be set with the slider. "100g", "200g" and "300g" can be selected as the defrosting amount.

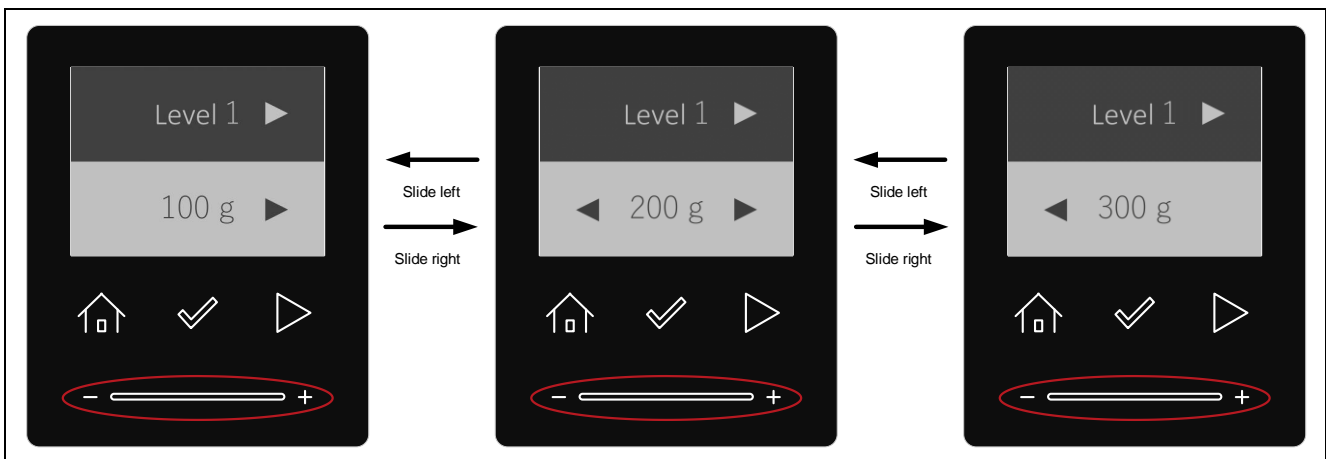


Figure 5-17 Setting the number of grams

5.4.3.4 Start defrosting

While the Defrost detail setting screen is displayed and the cursor is on the lower side, touching the "start" button can start defrosting.

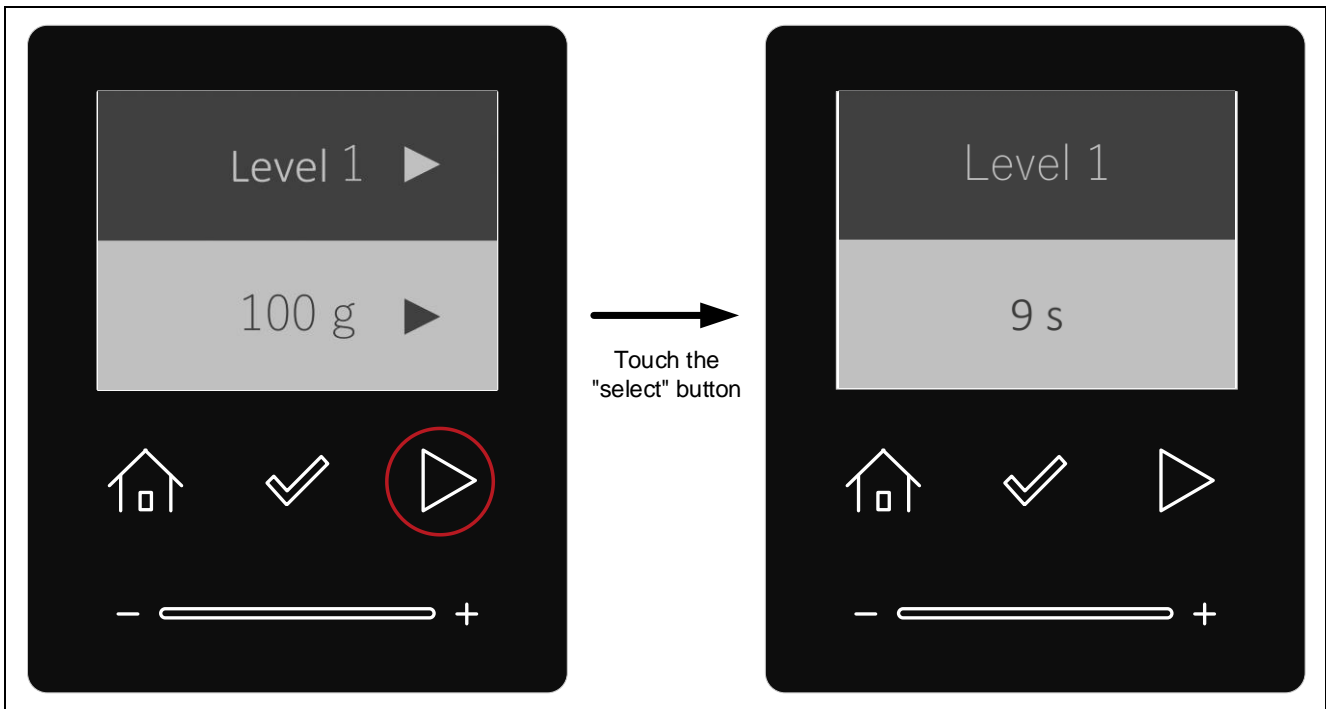


Figure 5-18 Start defrosting in Manual mode

5.4.4 Select Fish

While "Fish" is selected on the Defrost mode selection screen, touching the "start" button can start defrosting with the settings for "Fish".

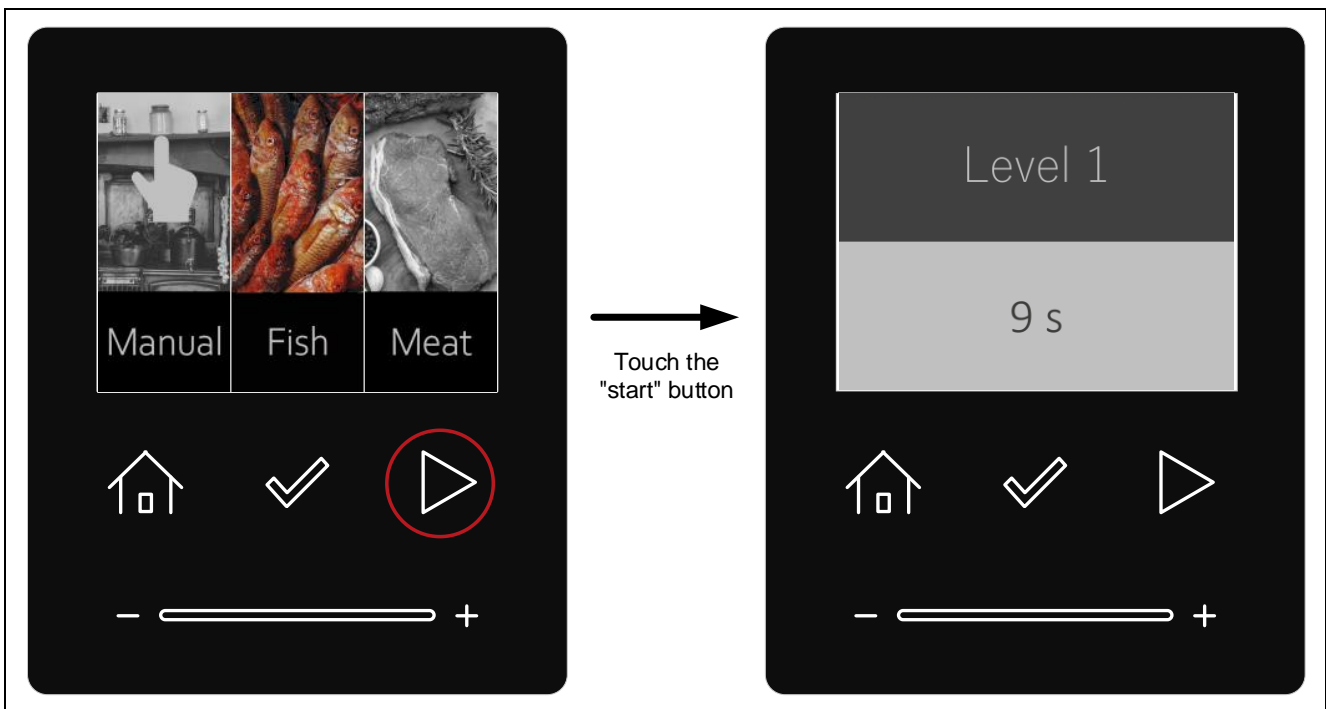


Figure 5-19 Start defrosting in Fish mode

5.4.5 Select Meat

While "Meat" is selected on the Defrost mode selection screen, touching the "start" button can start defrosting with the settings for "Meat".

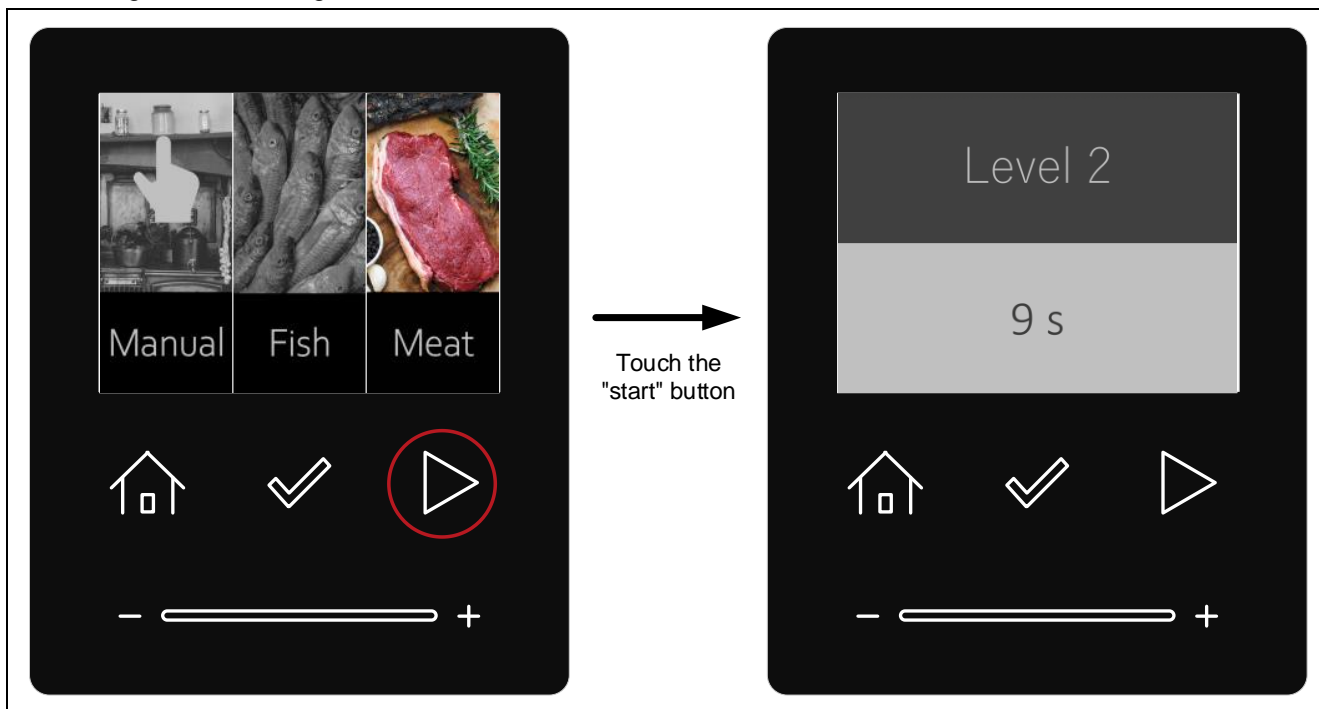


Figure 5-20 Start defrosting in Meat mode

5.5 Recipe setting

Recipe mode is not available with the firmware ver.0.90.

5.5.1 Move to recipe selection screen

While "Recipe" is selected on the menu screen, touching the "select" button can move to the Recipe selection screen.

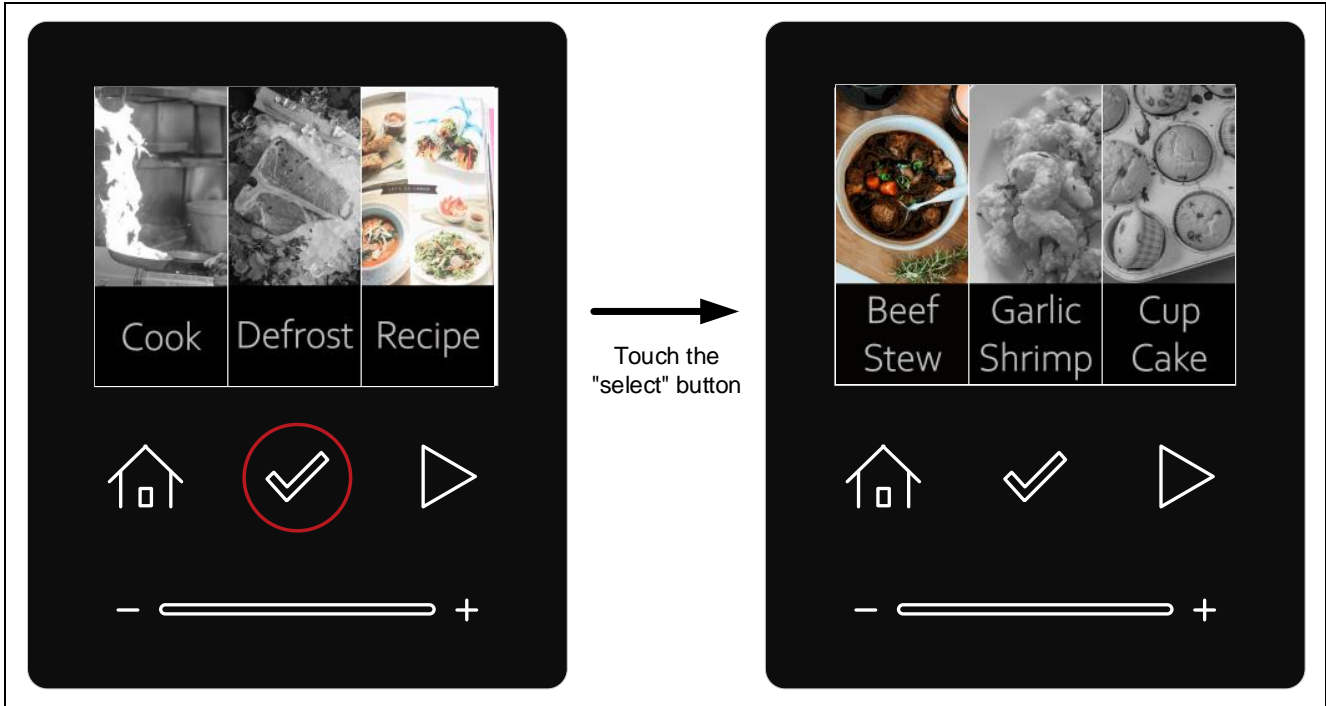


Figure 5-21 Move to the Recipe selection screen

5.5.2 Select recipe

While the Recipe selection screen is displayed, "Beef Stew", "Garlic Shrimp" or "Cup Cake" can be selected with the slider operation.

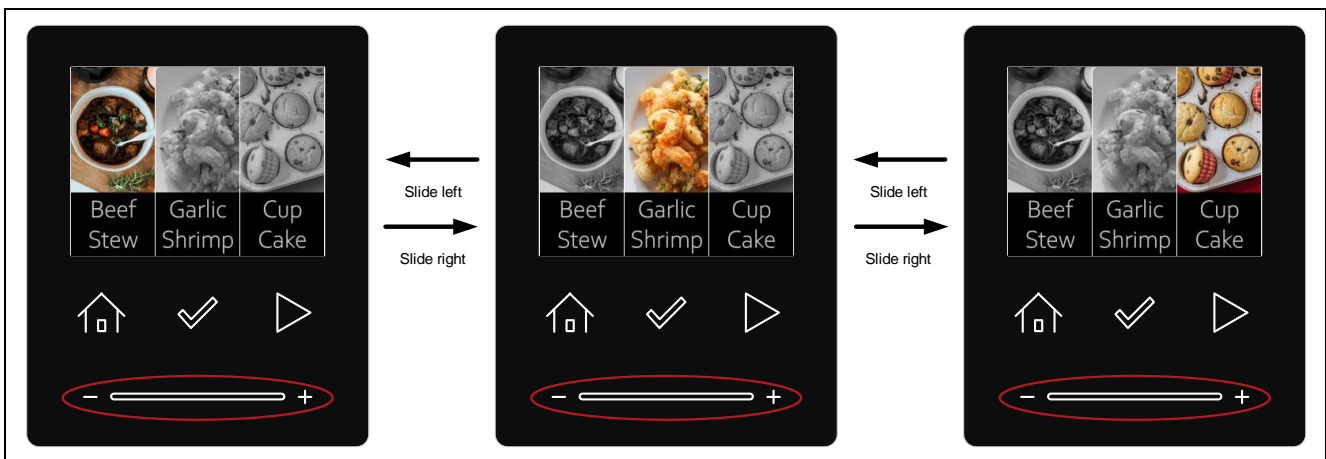


Figure 5-22 How to operate the Recipe selection screen

5.5.3 Select Beef Stew

While "Beef Stew" is selected on the Recipe selection screen, touching the "start" button can start cooking for the Settings for Beef Stew.

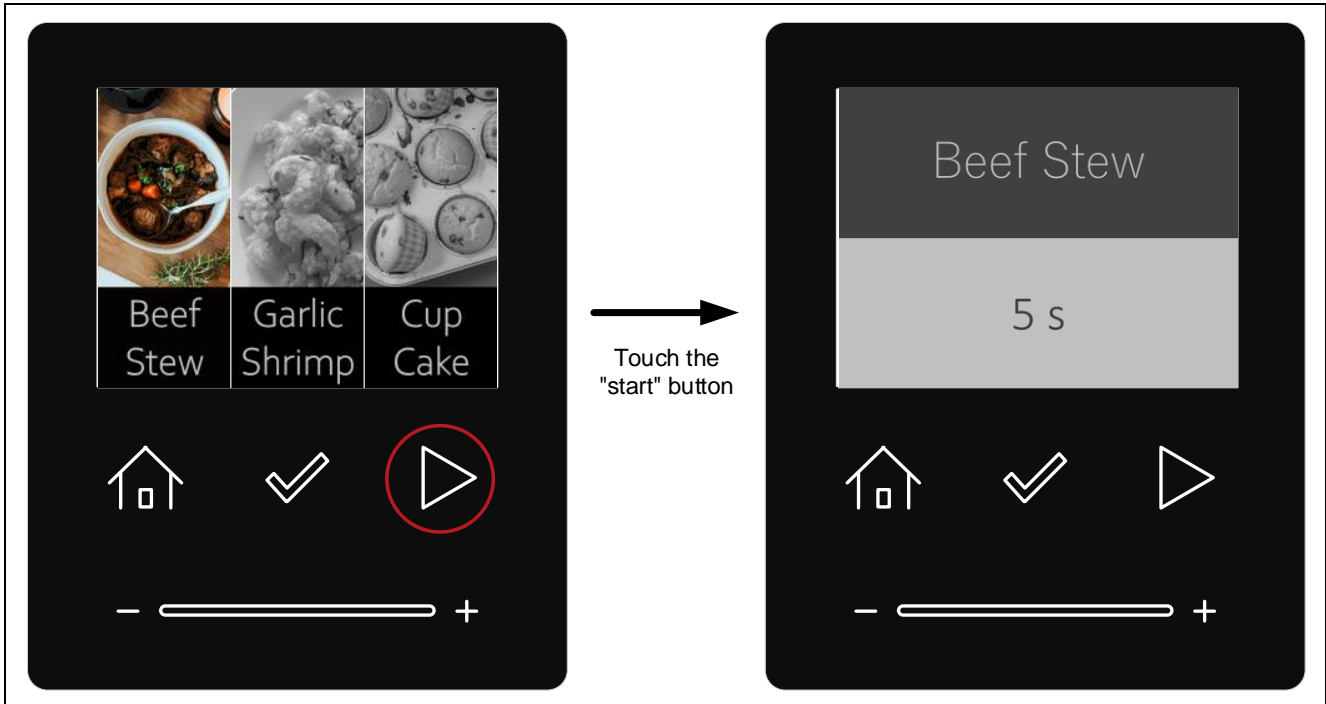


Figure 5-23 Start cooking in Beef Stew mode

5.5.4 Select Garlic Shrimp

While "Garlic Shrimp" is selected on the Recipe selection screen, touching the "start" button can start cooking for the Settings for Garlic Shrimp.

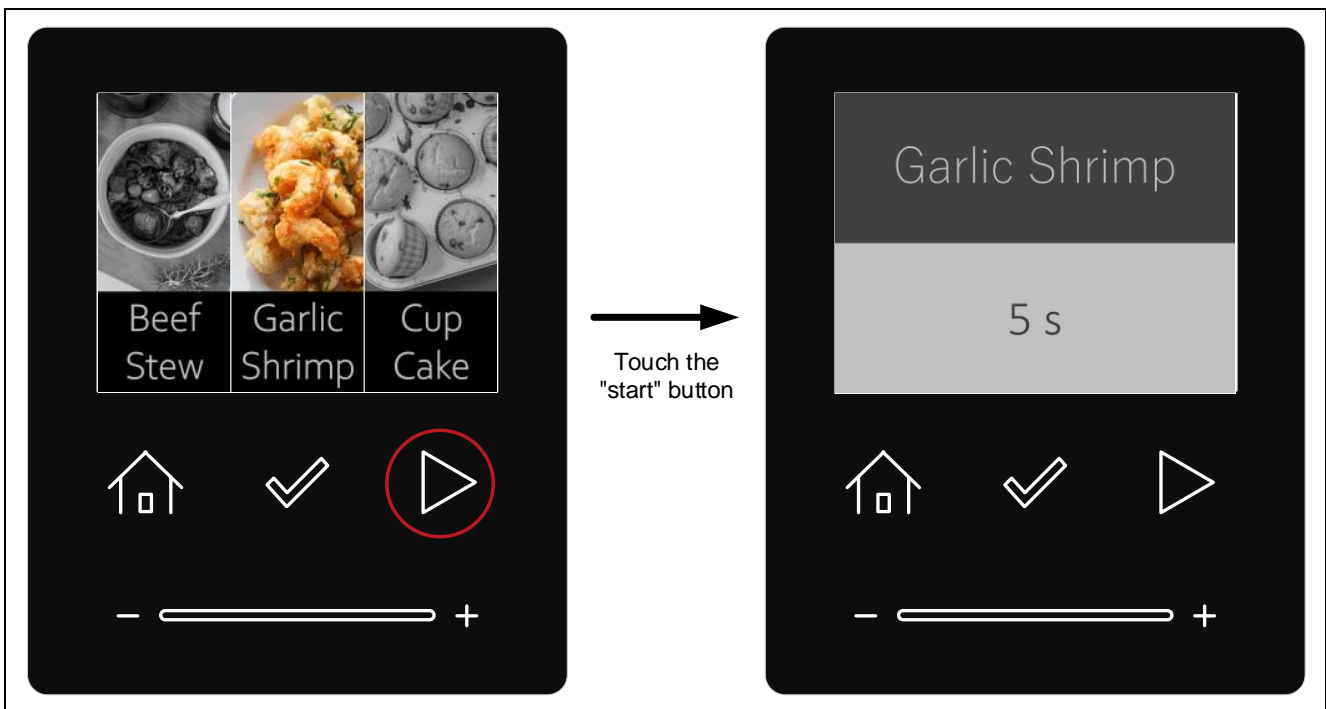


Figure 5-24 Start cooking in Garlic Shrimp mode

5.5.5 Select Cup Cake

While "Cup Cake" is selected on the Recipe selection screen, touching the "start" button can start cooking for the Settings for Cup Cake.

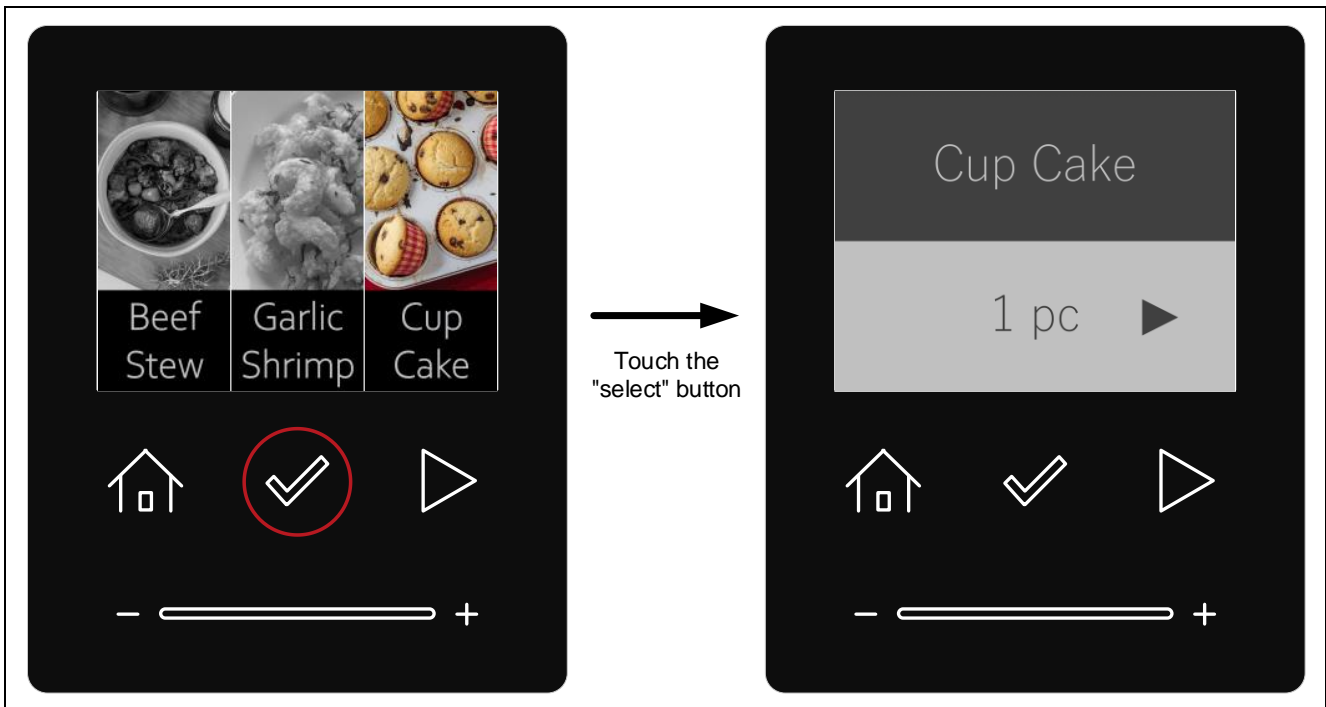


Figure 5-25 Move to the Cup Cake detail setting screen

5.5.5.1 Set the number of cupcakes

You can set the number of cupcakes with the slider. "1pc", "2pcs" and "3pcs" can be selected as the cooking amount.

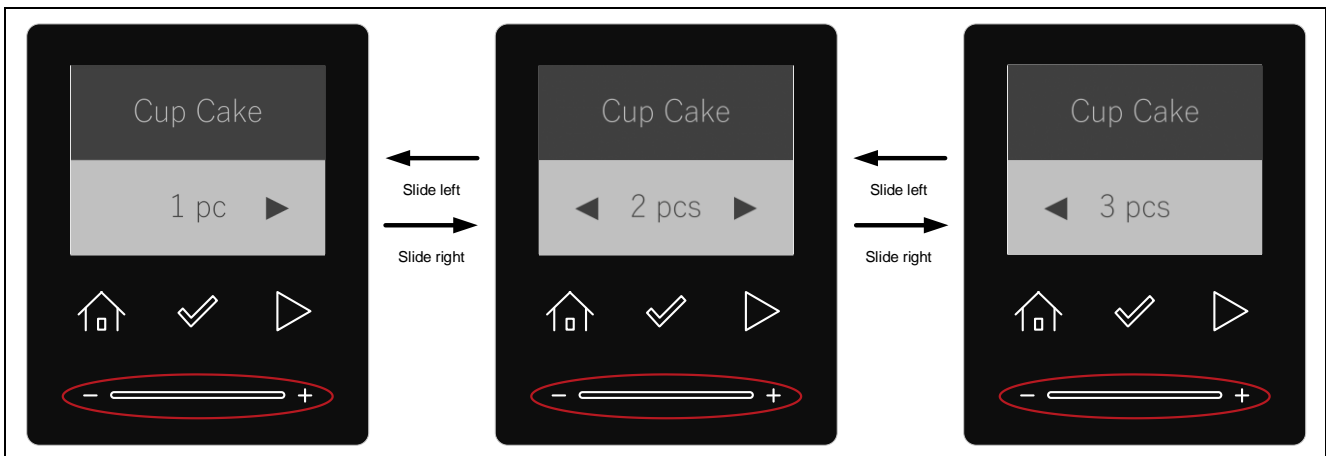


Figure 5-26 Setting the number of cupcakes

5.5.5.2 Start cooking

While the Cup Cake detail setting screen is displayed, touching the "start" button can start cooking.

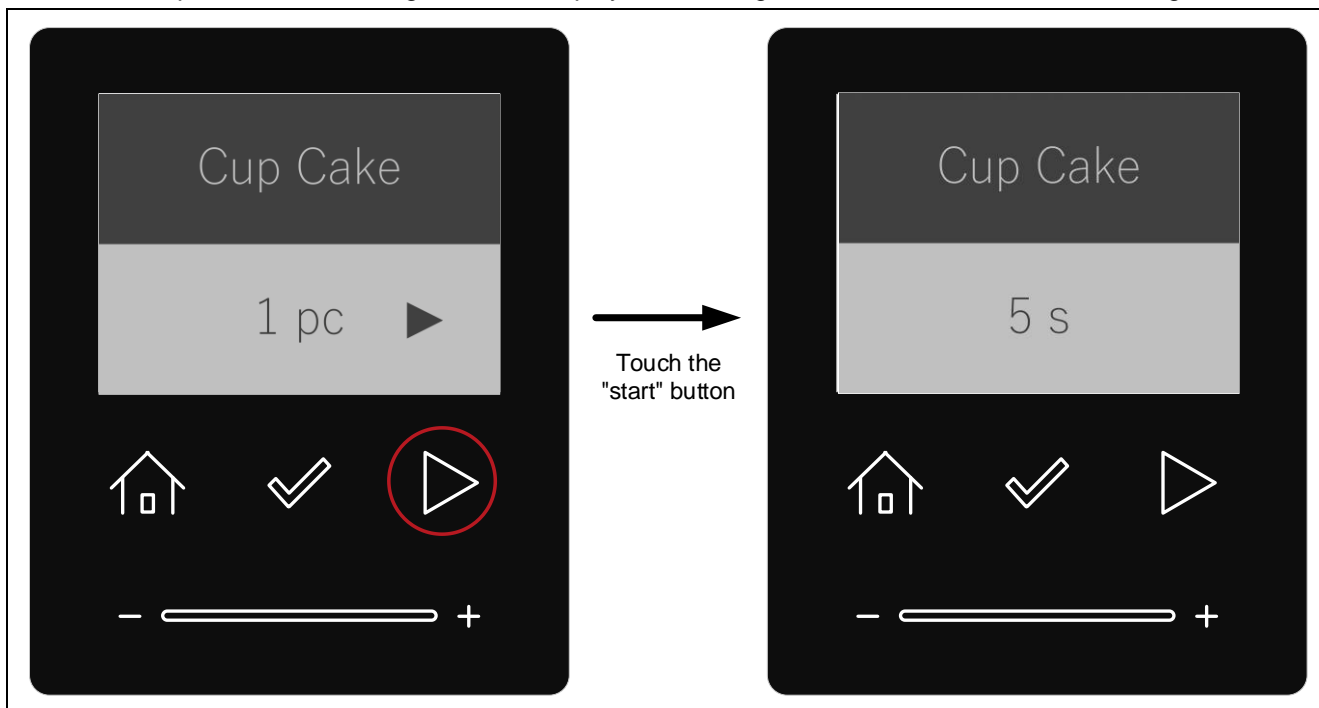


Figure 5-27 Start cooking in Cup Cake mode

5.6 About the "home" button

The "home" button returns to the menu screen from any screen.

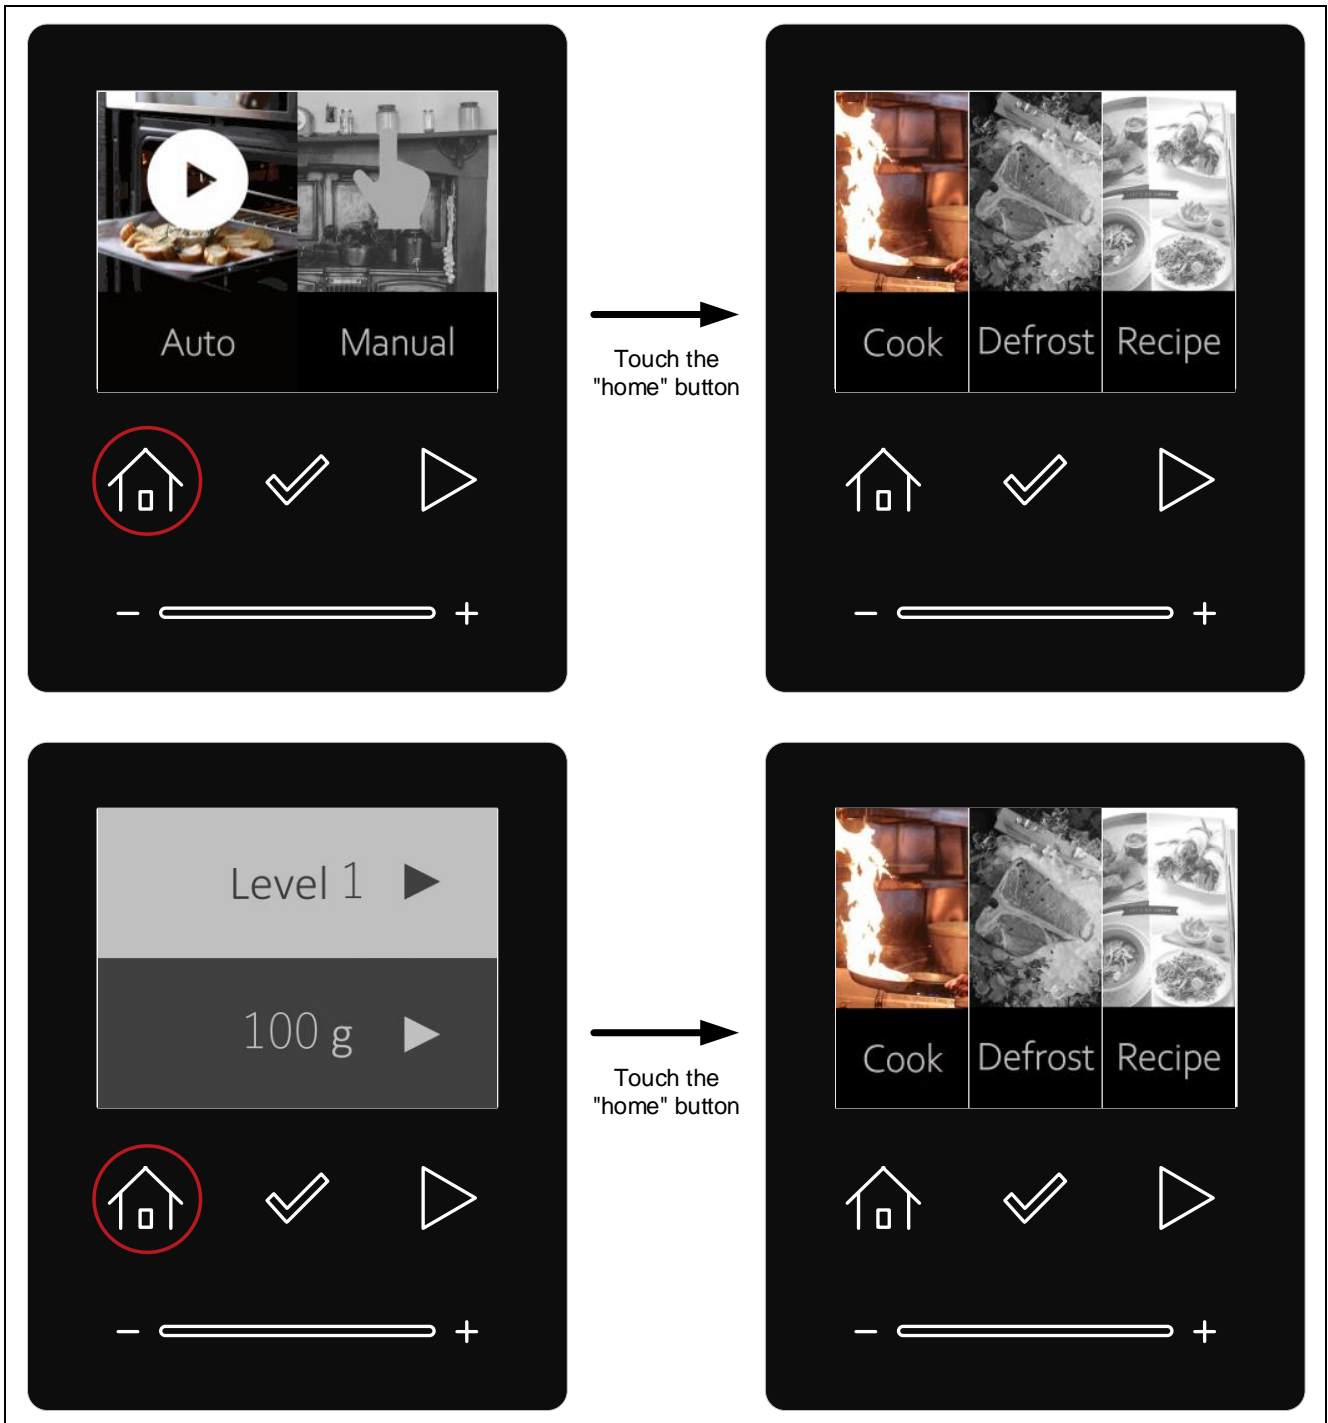


Figure 5-28 Example of "home" button operation

5.7 About the cooking completion screen

While completed cooking, the cooking completion screen is displayed for 3 seconds. After that, move to the menu screen automatically.

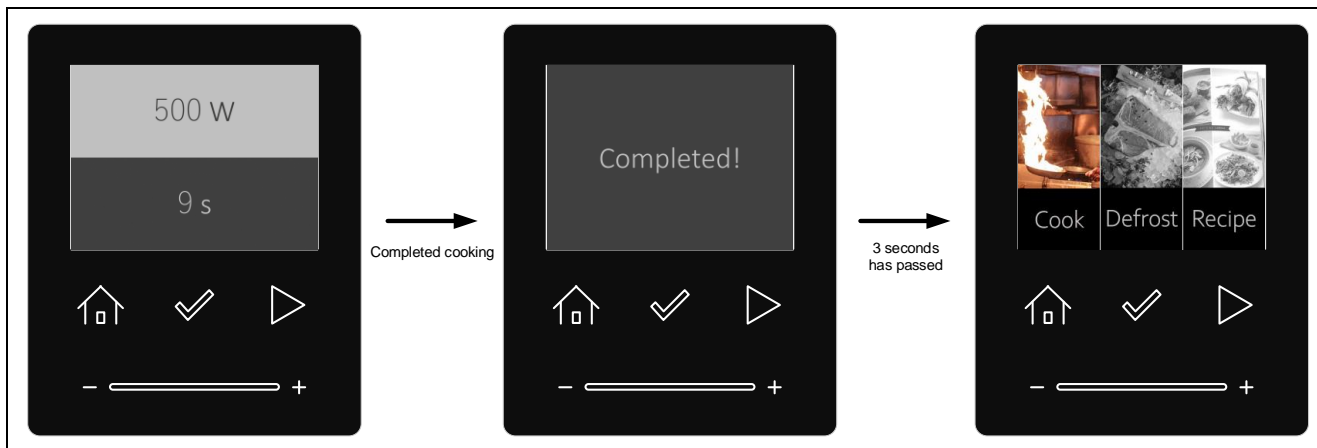


Figure 5-29 Example of cooking completion operation

5.8 Automatic LCD off function

If no touch operation is performed for 10 seconds, the LCD will turn off. Touching any buttons will return to the previous screen.

6. Update firmware version

Two version of firmware are available in this application note. One of them has firmware version 0.90 and its file name is userprog_v0.90.rsu, the other firmware version is 1.00 and its file name is userprog_v1.00.rsu. In the initial state, version 0.90 firmware including a bootloader that supports FOTA is written, and can update it to version 1.00 firmware by following the procedure described later.

The differences by firmware version are shown below. The firmware version in use is displayed on the initial screen. In addition, the menu screen is different for each version.



Figure 6-1 Differences by firmware version

1. Upload and save the OTA update firmware userprog_v0.90.rsu or userprog_v1.00.rsu to Amazon S3 bucket as described in "1.2 Create an Amazon S3 bucket" in "How to implement FreeRTOS OTA by using Amazon Web Services on RX65N".

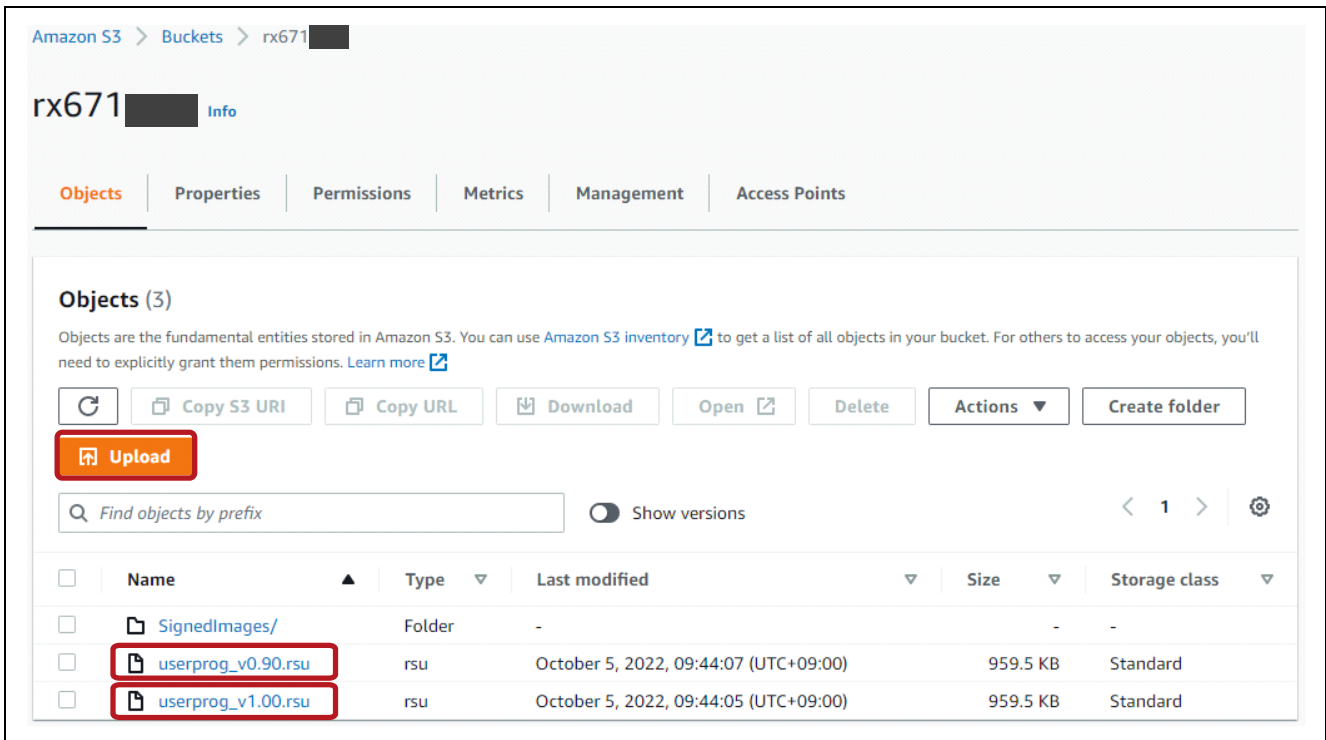


Figure 6-2 userprog.rsu upload

2. Create job to update firmware on RX671 PoC.

AWS IoT Jobs is a service that notifies one or more connected devices that they have a pending "job". A job can be used to manage large numbers of devices, update firmware and security certificates on devices, or perform administrative tasks such as rebooting and diagnostics devices.

—Select [AWS IoT] → [Manage] → [Jobs] → [Create] → [Create OTA Update job] → Set job name → [Next]

—Create a FreeRTOS OTA update job as below:

Select the name of the thing. (Figure 6-3 (a), Figure 7-11)

Select Code signing profile. (Figure 6-3 (b))

Select firmware image from S3 for FOTA. (Figure 6-3 (c))

Select IAM role. (Figure 6-3 (d))

—Click [Next]

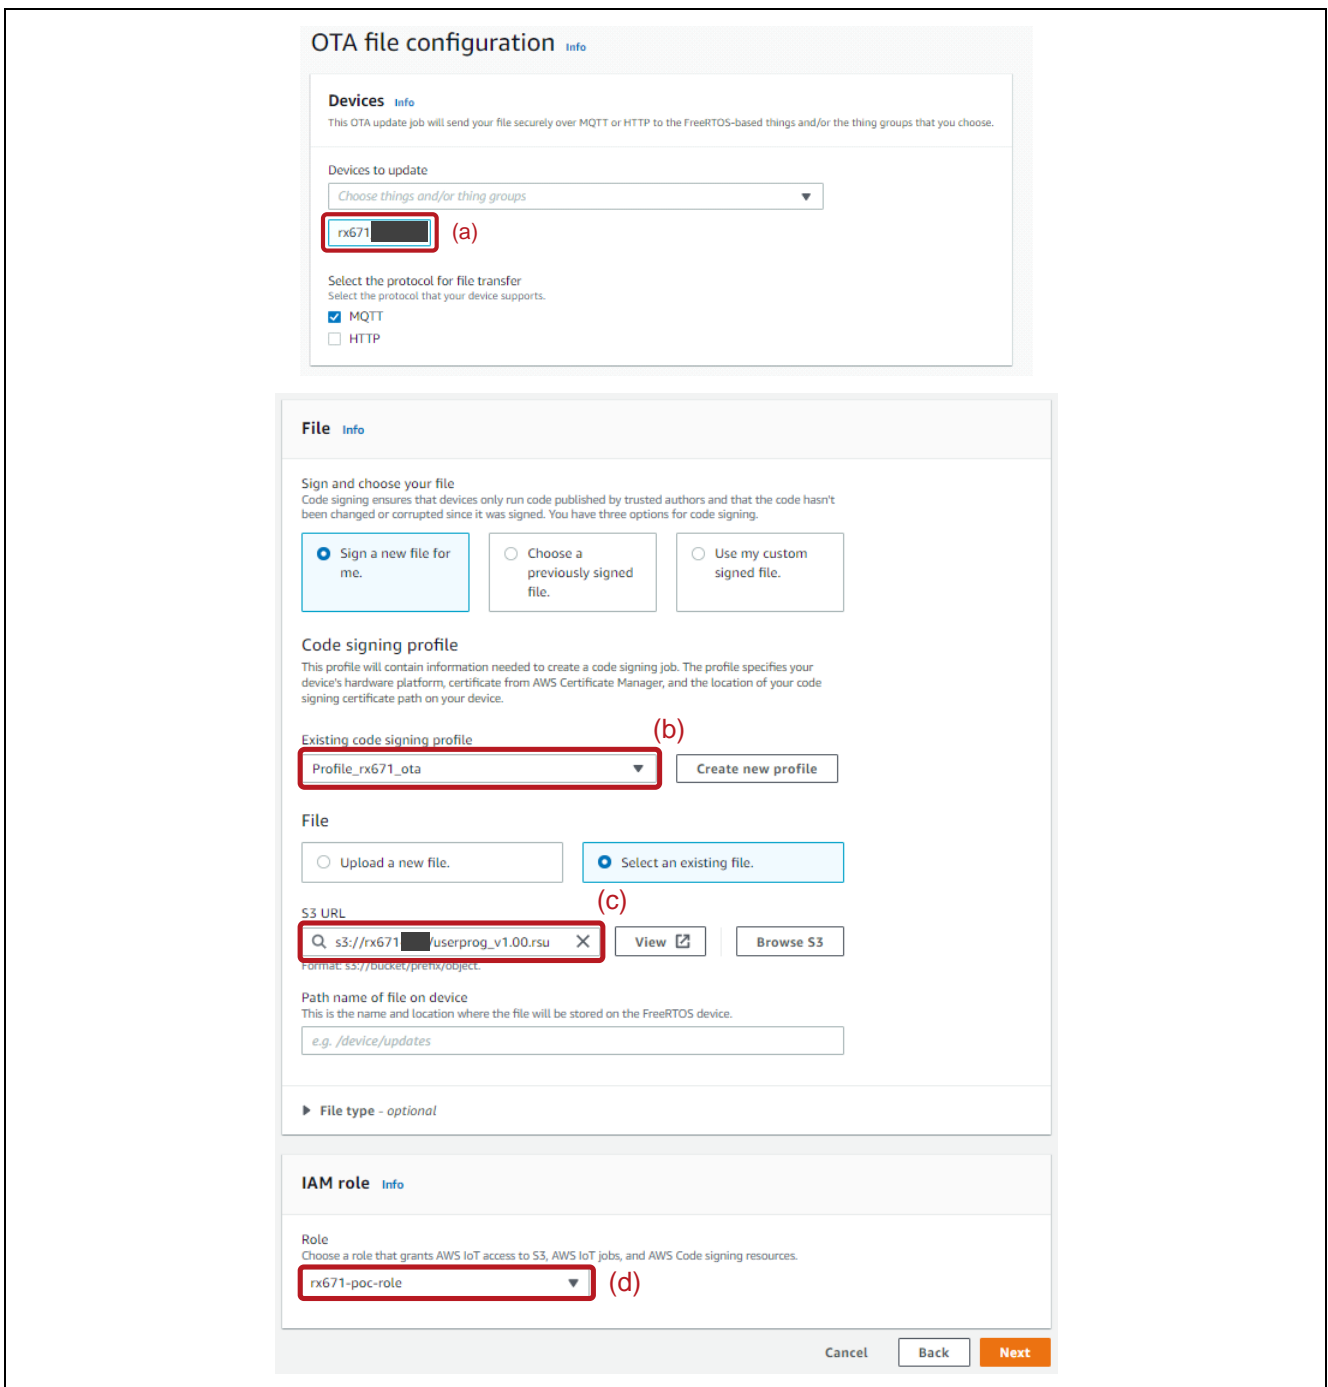


Figure 6-3 Job creation (1)

3. Click [Create job].

OTA job configuration [Info](#)

Job run type

Choose how to run this job.

- Your job will complete after deploying to the devices and groups that you chose (snapshot)
- Your job will continue to deploy to any devices added to the groups that you chose (continuous)

▶ **Job start rollout configuration - optional**

Specify how quickly devices will be notified when a pending job starts.

▶ **Job stop configuration - optional**

These configurations define when to automatically stop the job. The job stops if a percentage of devices fail the deployment after a minimum number have deployed. The job cancels if any of the criteria are met after the job starts.

▶ **Job run timeout configuration - optional**

Specify how long the job will run.

Cancel

Figure 6-4 Job creation (2)

- Open Tera Term and confirm that the firmware has been updated.
OTA demonstration version is 1.00 and has been updated successfully.

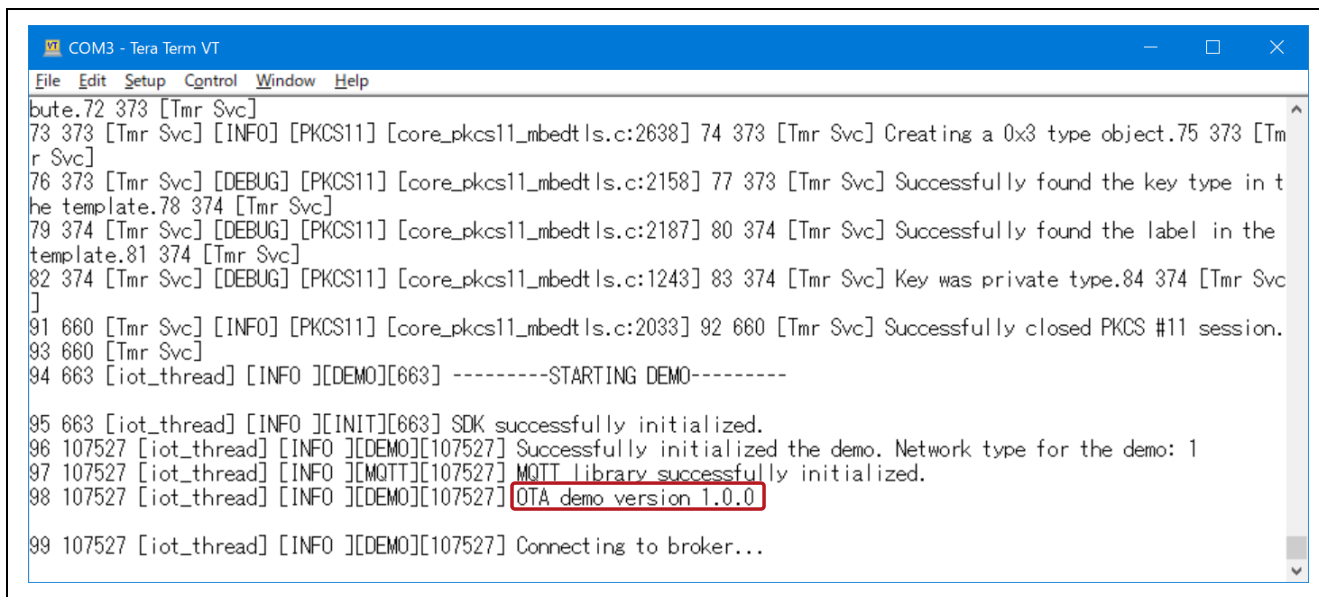


Figure 6-5 Check Execution Result

The Tera Term setup is shown below. If do not have Tera Term on PC, please download from <https://tssh2.osdn.jp/index.html.en>.

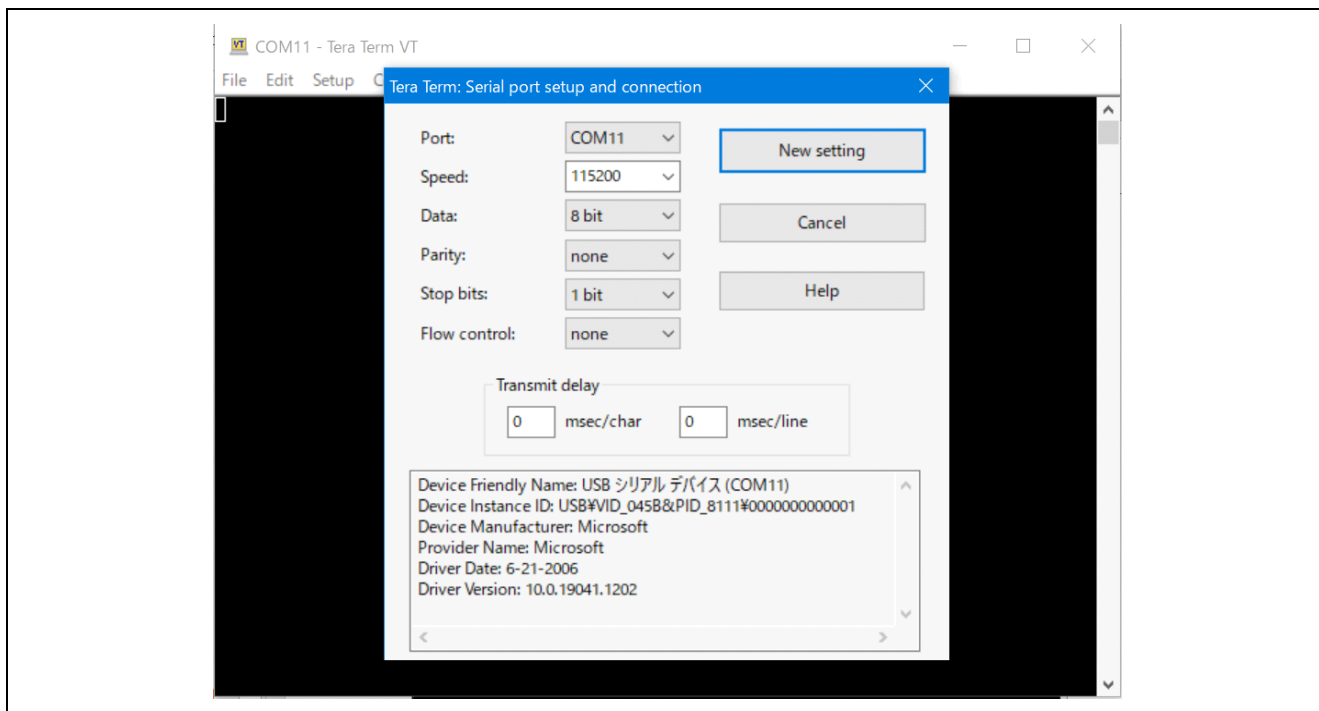


Figure 6-6 Tera Term

5. Check job status to be "Succeeded".

The screenshot shows the AWS IoT console interface for managing a job. The breadcrumb navigation is 'AWS IoT > Manage > Remote Actions > Jobs > AFR_OTA-job_ota_rx671'. The job name 'AFR_OTA-job_ota_rx671' is displayed with an 'info' icon. There are buttons for 'Refresh', 'Edit', and 'Save as a job template'. The 'Job executions' tab is active, showing an 'Execution overview' table with the following data:

Succeeded	Failed	Canceled	Rejected
1	0	0	0
Queued	In progress	Removed	Timed out
0	0	0	0

Below the overview, there is a section for 'Job executions (1) Info' with a 'Cancel execution' button. A search bar is present with the text 'Find job executions'. A dropdown menu shows 'All job executions (1)'. A table lists the job execution details:

Thing name	Retry attempts	Retries remain...	Last updat...	Queued at	Status
rx671	-	Retries not set	September 0...	September 0...	Succeeded

Figure 6-7 Check Succeeded

7. How to create a user program that supports OTA

This section describes how to rewrite the program from the cloud by OTA.

The program is rewritten in the background and automatically switched to the new program at the next power-on.

First, user can select the version of Amazon FreeRTOS package. The selected version will be downloaded from GitHub and imported automatically into the project. This makes it easier for the user, so that the user can focus only on Amazon FreeRTOS configuration and writing program.

7.1 AWS Preparation

To perform OTA from the cloud, it is necessary to prepare a cloud environment.

Use AWS as the cloud. Refer to the following for more information on preparing for AWS.

RX Family How to implement FreeRTOS OTA by using Amazon Web Services on RX65N (R01AN5549).

7.2 Import, configure head file and build aws_demos and boot_loader

The figure below shows how to import Amazon FreeRTOS project:

1. Launch e² studio.
2. Select [File] → [Import...]
3. Select [Renesas GitHub FreeRTOS (with IoT libraries) Project]

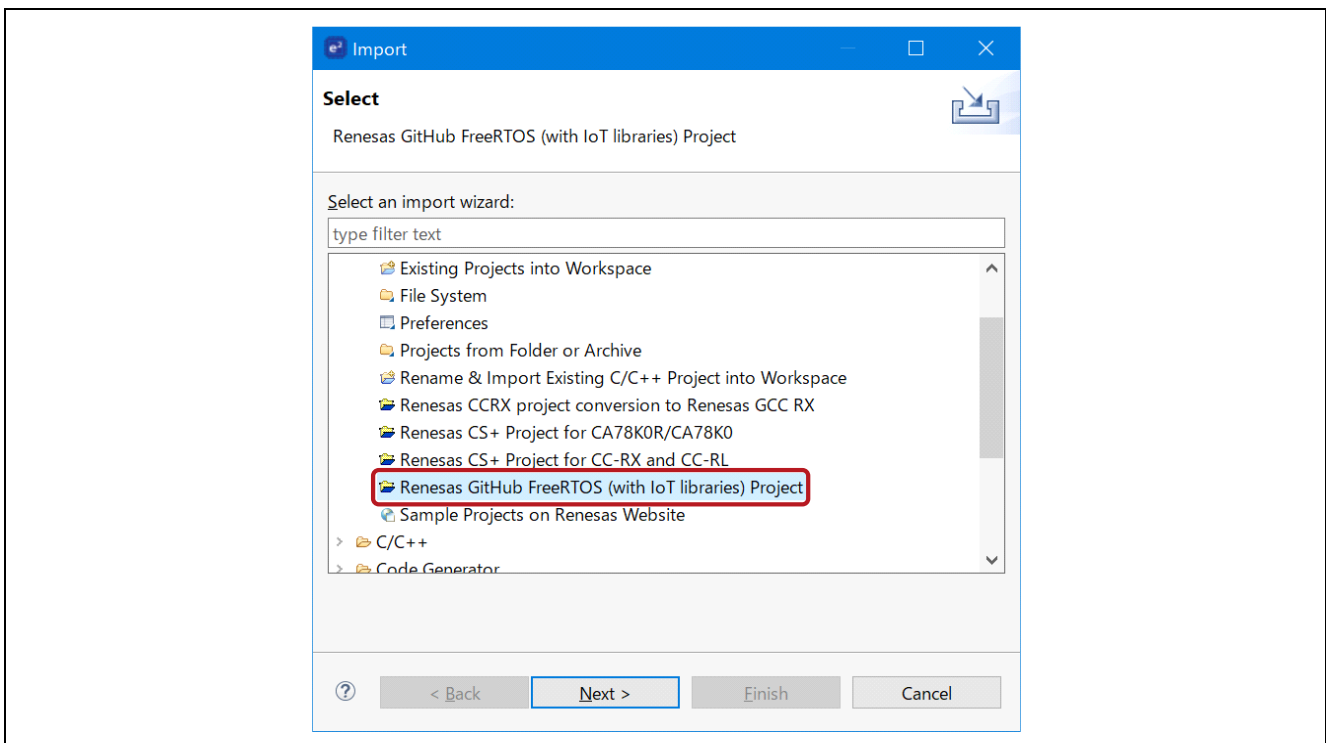


Figure 7-1 Importing Projects

4. Click [Check for more version...] to show the “FreeRTOS (with IoT libraries)” dialog.

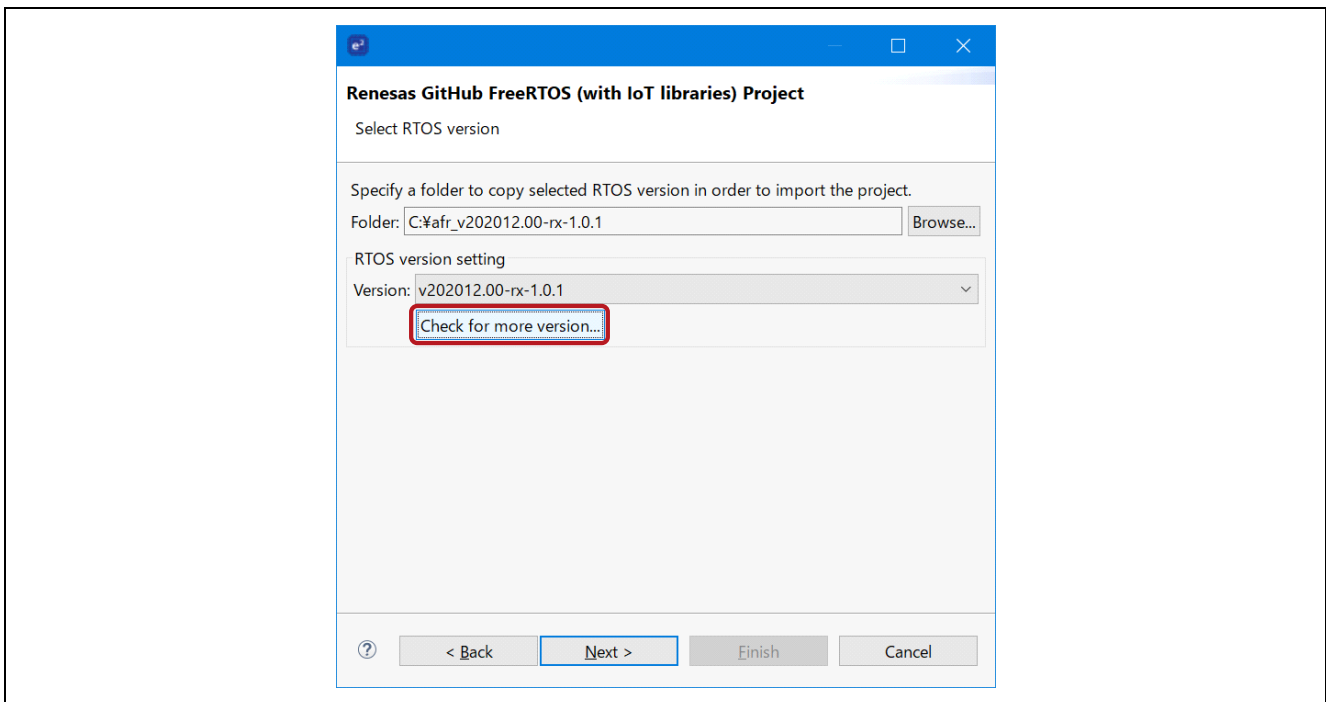


Figure 7-2 “FreeRTOS (with IoT libraries)” dialog

5. Select the latest version. (If the latest version is not displayed, create a new e² studio workspace)

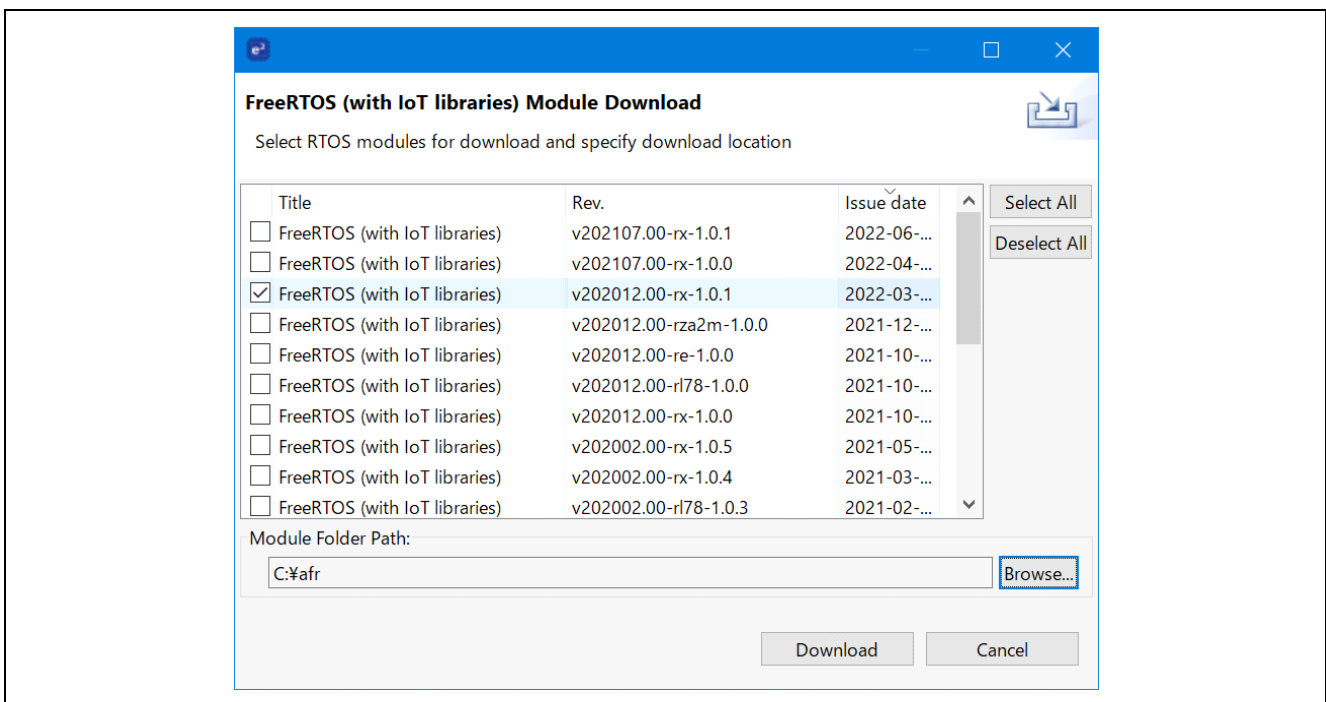


Figure 7-3 Select OS version

6. Agree to the end user license agreement

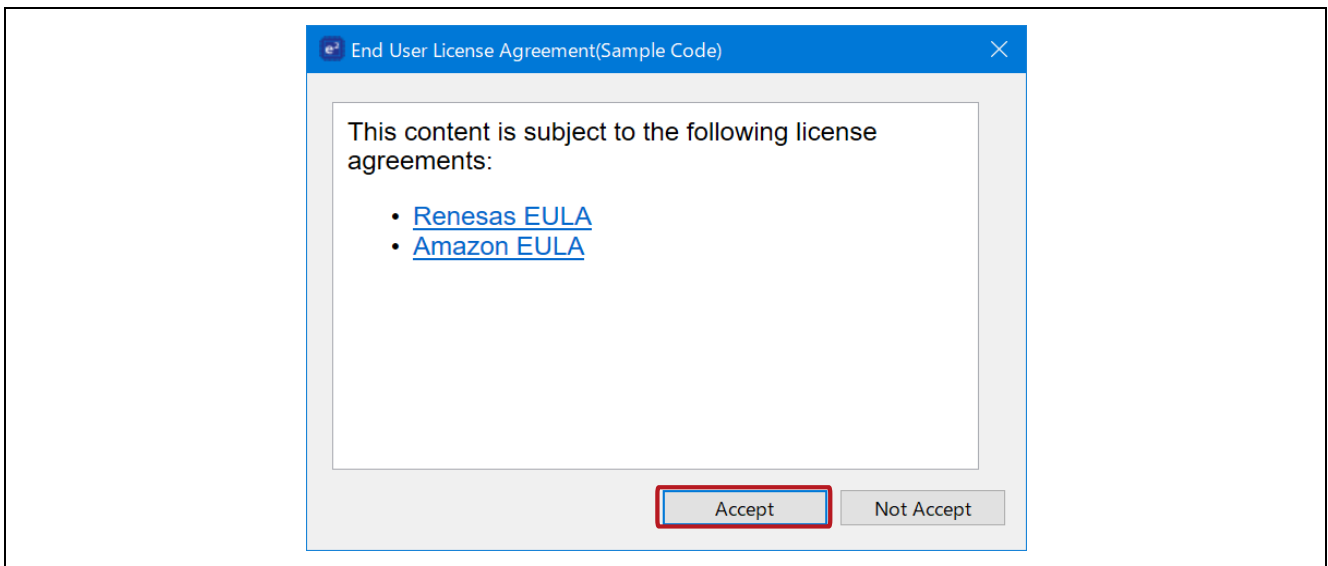


Figure 7-4 Agree to End User License Agreement

7. Wait for the download to complete.

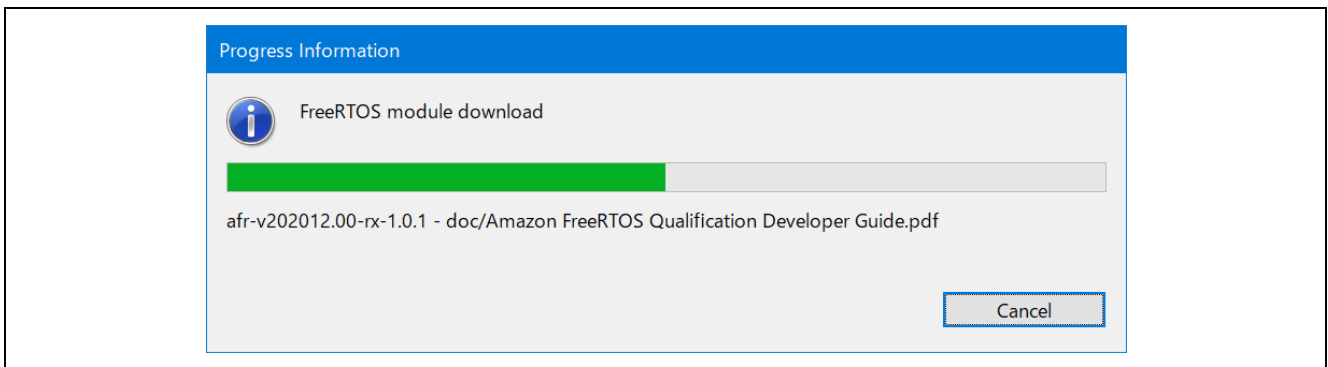


Figure 7-5 Waiting for download

8. Select the project to import. Select [aws_demos] and [boot_loader] project.

The `aws_demos` and `boot_loader` used in this demonstration have not been officially released in May 2023. Please contact our distributors and sales offices to request individual supplies.

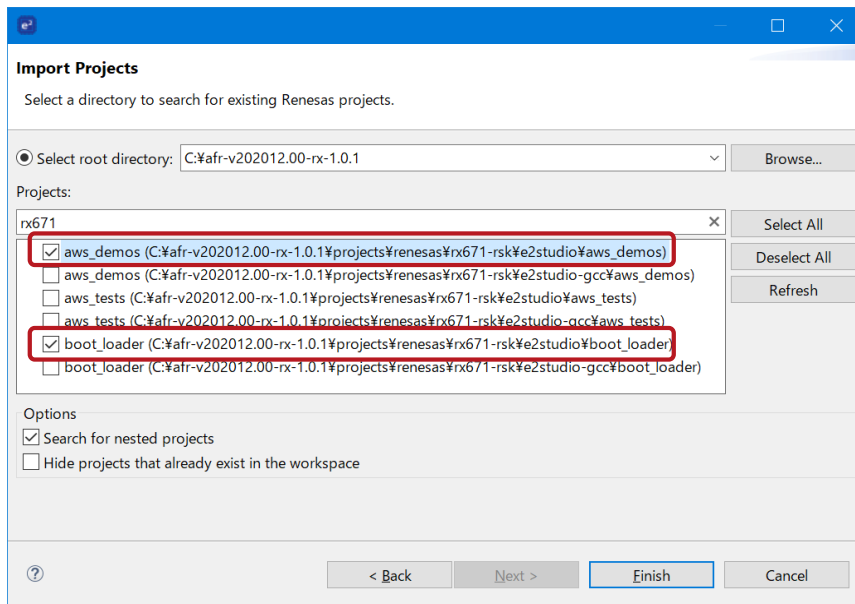


Figure 7-6 Select a project to import

- Open [Project] → [Properties] → [C/C++ Build] → [Tool Chain Editor] in both projects and select "Toolchain" and "Builder" to set the toolchain. Also, select [Setting] → [Toolchain] to set the version.

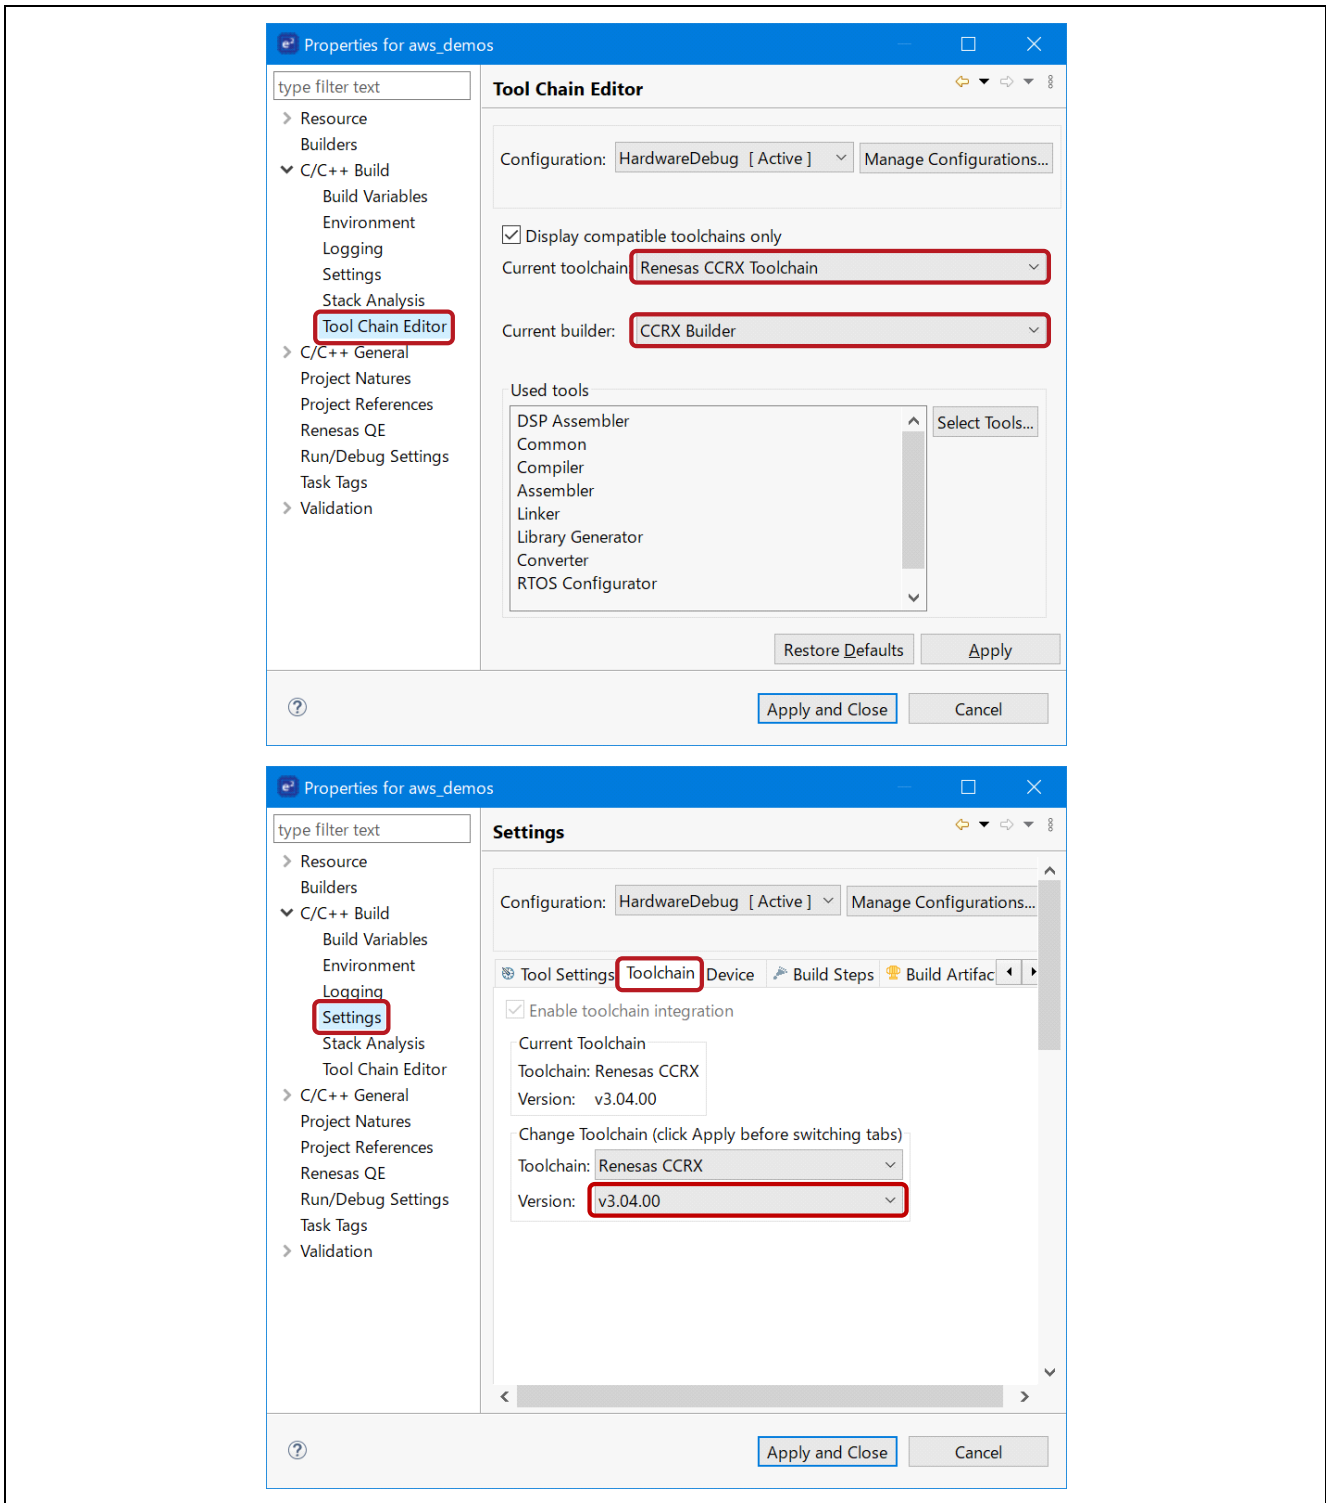


Figure 7-7 Tool Chain and Versioning

10. Select [Project] → [Properties] → [C/C++ Build] → [Settings] → [Converter] → [Output] and set [Motorola S format file].

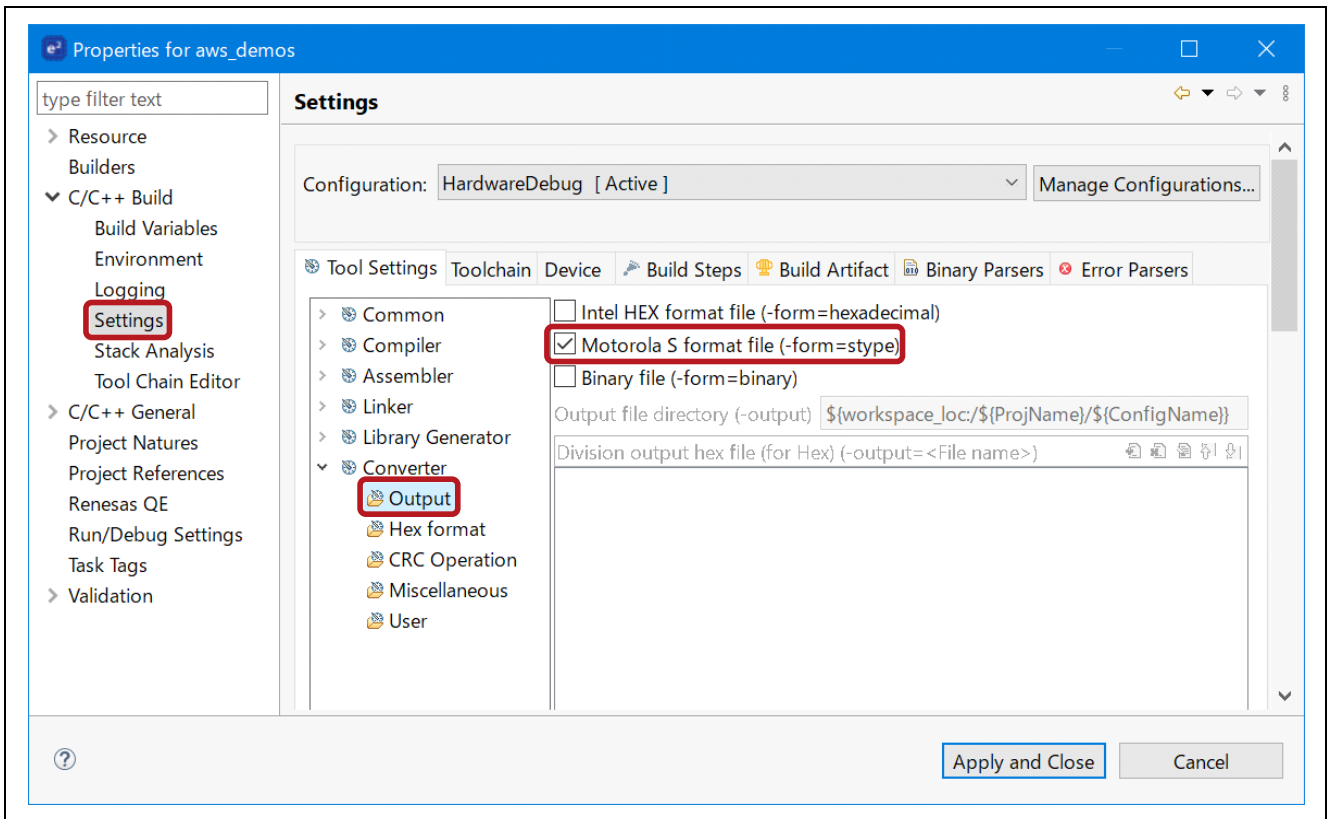


Figure 7-8 Motorola S format File output settings

11. Input the public key

In bootloader project, open

projects\renesas\rx671-rsk\le2studio\boot_loader\src\key\code_signer_public_key.h and input public key. Please refer to “Renesas MCU Firmware Update Design Policy” section “7.3 Generating ECDSA-SHA256 Key Pairs with OpenSSL” to create public key.

When completed to create public key, build and generate the boot_loader.mot file for the boot loader project.

The aws_demos and boot_loader used in this demonstration have not been officially released in May 2023. Please contact our distributors and sales offices to request individual supplies.

```

2
20
24
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223
2224
2225
2226
2227
2228
2229
2230
2231
2232
2233
2234
2235
2236
2237
2238
2239
2240
2241
2242
2243
2244
2245
2246
2247
2248
2249
2250
2251
2252
2253
2254
2255
2256
2257
2258
2259
2260
2261
2262
2263
2264
2265
2266
2267
2268
2269
2270
2271
2272
2273
2274
2275
2276
2277
2278
2279
2280
2281
2282
2283
2284
2285
2286
2287
2288
2289
2290
2291
2292
2293
2294
2295
2296
2297
2298
2299
2300
2301
2302
2303
2304
2305
2306
2307
2308
2309
2310
2311
2312
2313
2314
2315
2316
2317
2318
2319
2320
2321
2322
2323
2324
2325
2326
2327
2328
2329
2330
2331
2332
2333
2334
2335
2336
2337
2338
2339
2340
2341
2342
2343
2344
2345
2346
2347
2348
2349
2350
2351
2352
2353
2354
2355
2356
2357
2358
2359
2360
2361
2362
2363
2364
2365
2366
2367
2368
2369
2370
2371
2372
2373
2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385
2386
2387
2388
2389
2390
2391
2392
2393
2394
2395
2396
2397
2398
2399
2400
2401
2402
2403
2404
2405
2406
2407
2408
2409
2410
2411
2412
2413
2414
2415
2416
2417
2418
2419
2420
2421
2422
2423
2424
2425
2426
2427
2428
2429
2430
2431
2432
2433
2434
2435
2436
2437
2438
2439
2440
2441
2442
2443
2444
2445
2446
2447
2448
2449
2450
2451
2452
2453
2454
2455
2456
2457
2458
2459
2460
2461
2462
2463
2464
2465
2466
2467
2468
2469
2470
2471
2472
2473
2474
2475
2476
2477
2478
2479
2480
2481
2482
2483
2484
2485
2486
2487
2488
2489
2490
2491
2492
2493
2494
2495
2496
2497
2498
2499
2500
2501
2502
2503
2504
2505
2506
2507
2508
2509
2510
2511
2512
2513
2514
2515
2516
2517
2518
2519
2520
2521
2522
2523
2524
2525
2526
2527
2528
2529
2530
2531
2532
2533
2534
2535
2536
2537
2538
2539
2540
2541
2542
2543
2544
2545
2546
2547
2548
2549
2550
2551
2552
2553
2554
2555
2556
2557
2558
2559
2560
2561
2562
2563
2564
2565
2566
2567
2568
2569
2570
2571
2572
2573
2574
2575
2576
2577
2578
2579
2580
2581
2582
2583
2584
2585
2586
2587
2588
2589
2590
2591
2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
```


- 12. Open AWS IoT console
 - Browse to the AWS IoT console.
 - Select [Settings]. Make a note of the Endpoint. (Figure 7-10(e))

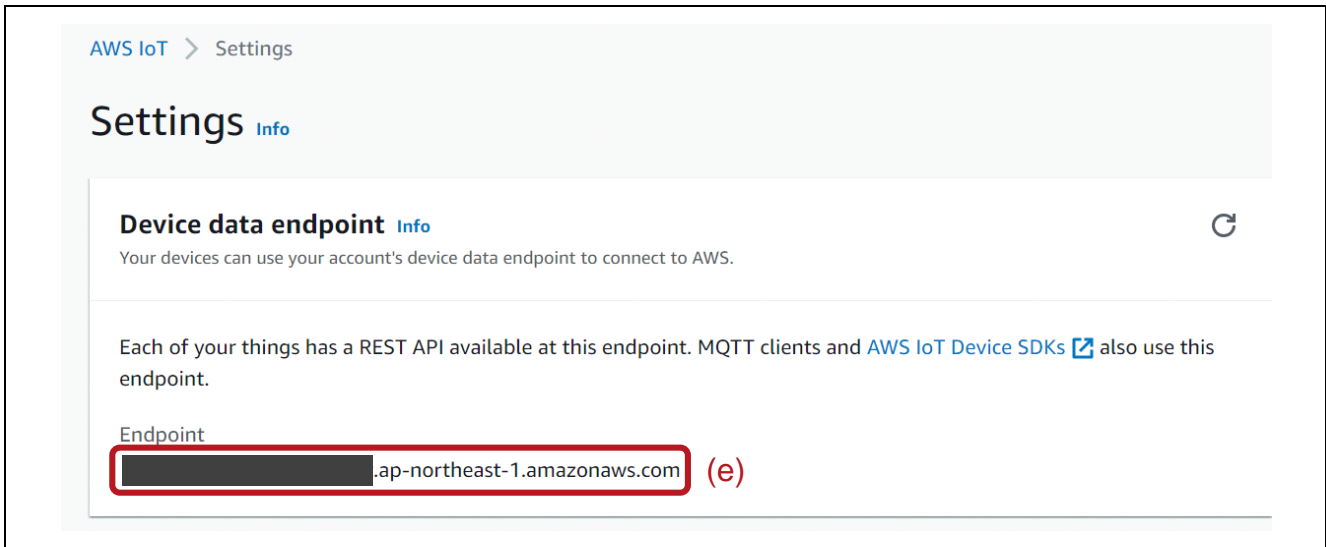


Figure 7-10 Check AWS Endpoint

- Select [Manage] → [Things]. Make a note of AWS IoT thing name. (Figure 7-11(f))

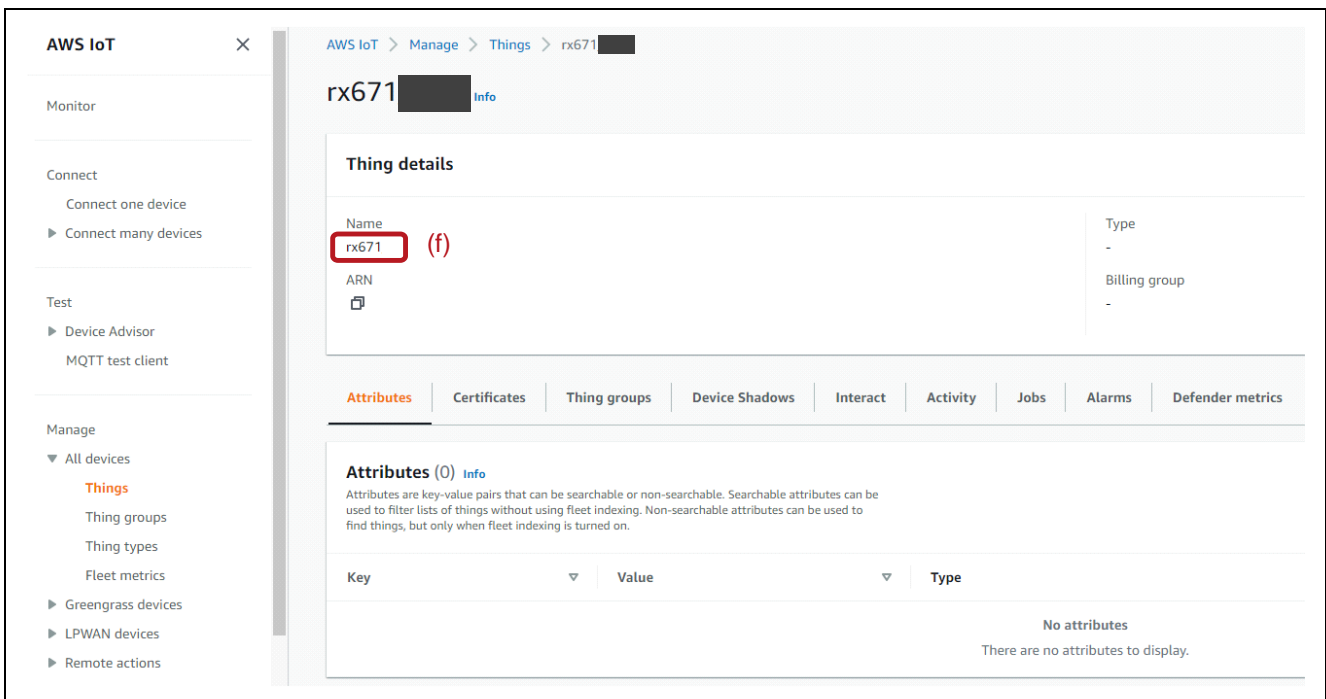


Figure 7-11 thing name

13. Open aws_demos project.

—Open /demos/include/aws_clientcredential.h and specify the following values

- #define clientcredentialMQTT_BROKER_ENDPOINT "Figure 7-10 (e) The Endpoint"
- #define clientcredentialIOT_THING_NAME "Figure 7-11 (f) thing name"

```

2      * * FreeRTOS V202012.00
25
26      #ifndef __AWS_CLIENTCREDENTIAL_H__
27      #define __AWS_CLIENTCREDENTIAL_H__
28
29      /*
30      * @brief MQTT Broker endpoint.
31      *
32      * @todo Set this to the fully-qualified DNS name of your MQTT broker.
33      */
34      #define clientcredentialMQTT_BROKER_ENDPOINT "██████████.iot.ap-northeast-1.amazonaws.com"
35
36      /*
37      * @brief Host name.
38      *
39      * @todo Set this to the unique name of your IoT Thing.
40      * Please note that for convenience of demonstration only we
41      * are using a #define here. In production scenarios the thing
42      * name can be something unique to the device that can be read
43      * by software, such as a production serial number, rather
44      * than a hard coded constant.
45      */
46      #define clientcredentialIOT_THING_NAME "██████████"
47
    
```

Figure 7-12 Input the endpoint and thing name

14. Open “Certificate Configuration Tool”

- Move to the FreeRTOS path downloaded in 7.1 step 5.
- Open [tools] → [certificate_congiguration] → CertificateConfigurator.html
- Import certificate PEM file and Private Key PEM file which were downloaded on 1.1 step (4) of "How to implement FreeRTOS OTA by using Amazon Web Services on RX65N"
- Generate awa_clientcredential_keys.h.

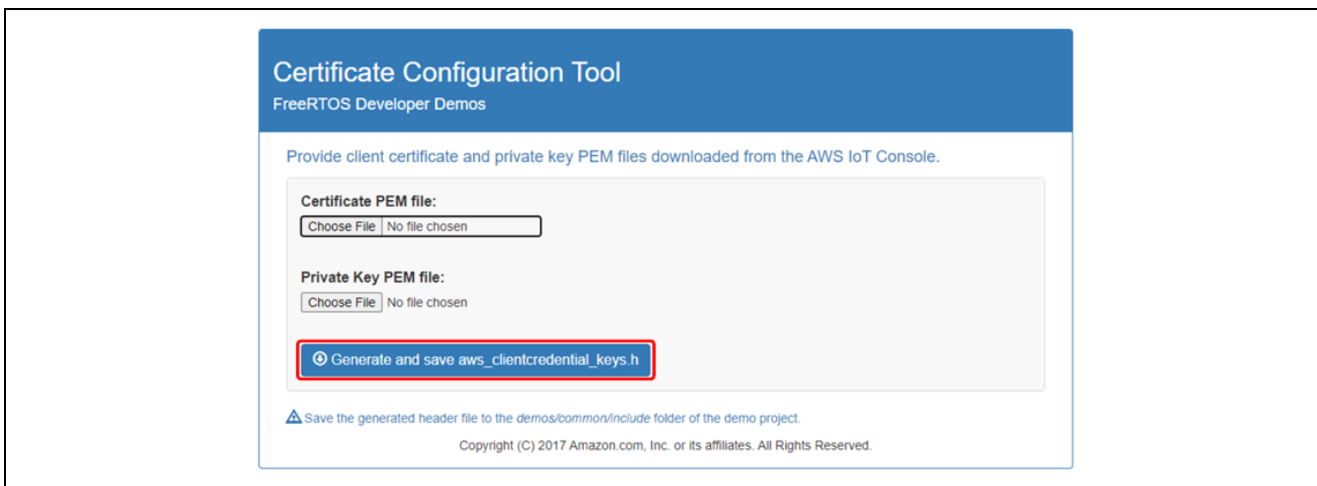


Figure 7-13 Generate clientcredential key

15. Open aws_demos project again


—Replace the aws_clientcredential_keys.h generated above with the file in /demos/include/.

—Open /demos/include/aws_ota_codesigner_certificate.h specify values below

signingcredentialSIGNING_CRETIFICATE_PEM [] = "xxxx";

"xxxx" is value from secp256r1.crt. Remember the "\n" after each line of certification.

For creating secp256r1.crt please refer to "How to implement FreeRTOS OTA by using Amazon web Services on RX65N" section "7.3 Generating ECDSA-SHA256 Key Pairs with OpenSSL".

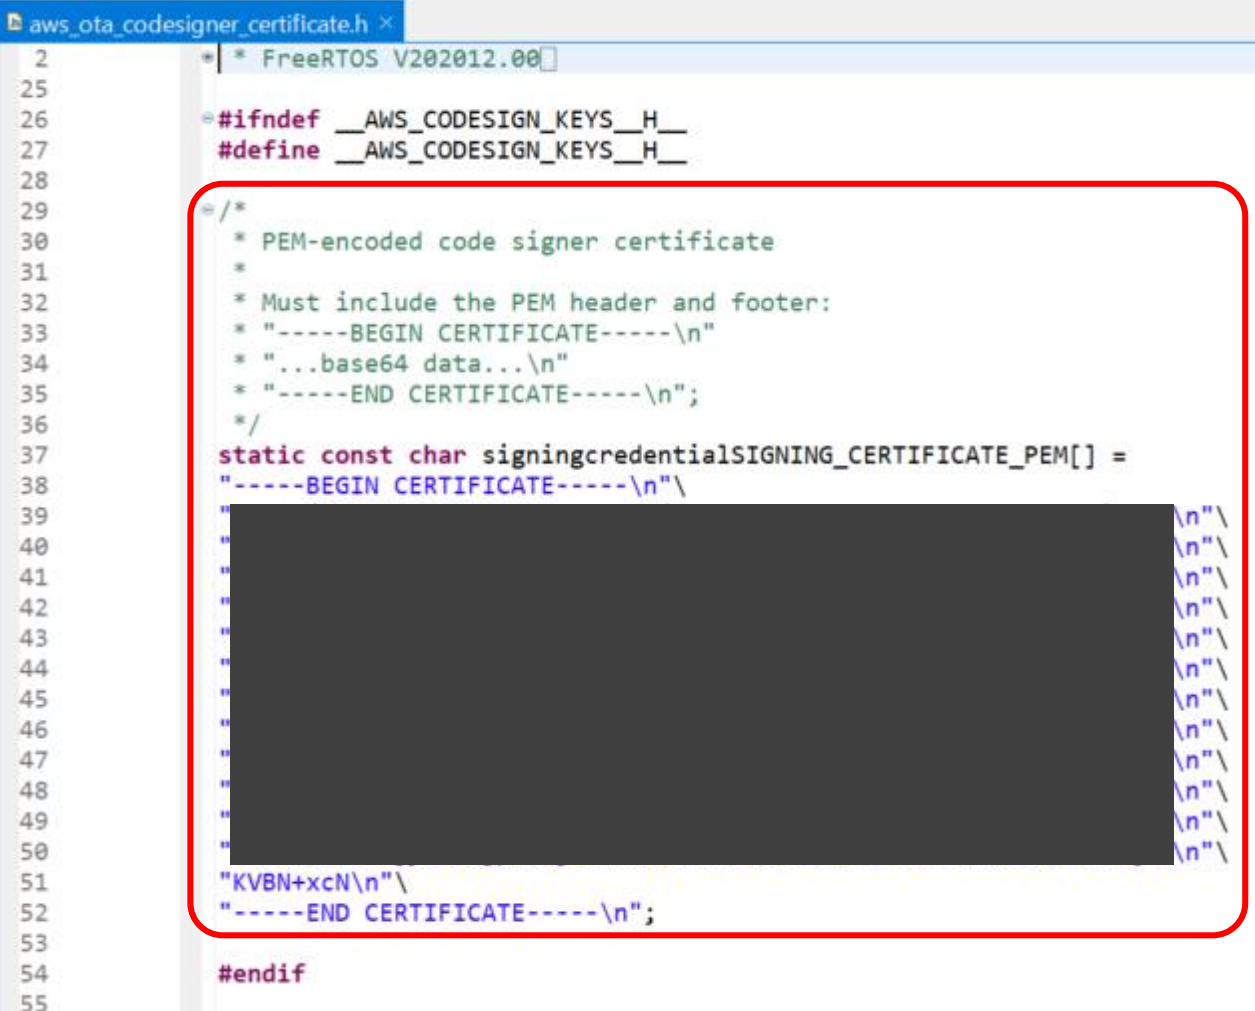

```


aws_ota_codesigner_certificate.h
* FreeRTOS V202012.00
2
25
26 #ifndef __AWS_CODESIGN_KEYS_H__
27 #define __AWS_CODESIGN_KEYS_H__
28
29 /*
30  * PEM-encoded code signer certificate
31  *
32  * Must include the PEM header and footer:
33  * "-----BEGIN CERTIFICATE-----\n"
34  * "...base64 data...\n"
35  * "-----END CERTIFICATE-----\n";
36  */
37 static const char signingcredentialSIGNING_CERTIFICATE_PEM[] =
38 "-----BEGIN CERTIFICATE-----\n"
39
40
41
42
43
44
45
46
47
48
49
50
51 "KVBN+xcN\n"
52 "-----END CERTIFICATE-----\n";
53
54 #endif
55

```

Figure 7-14 Input clientcredential

7.3 Install the initial version of firmware


1. Check the FreeRTOSApplicationConfig.h setting.

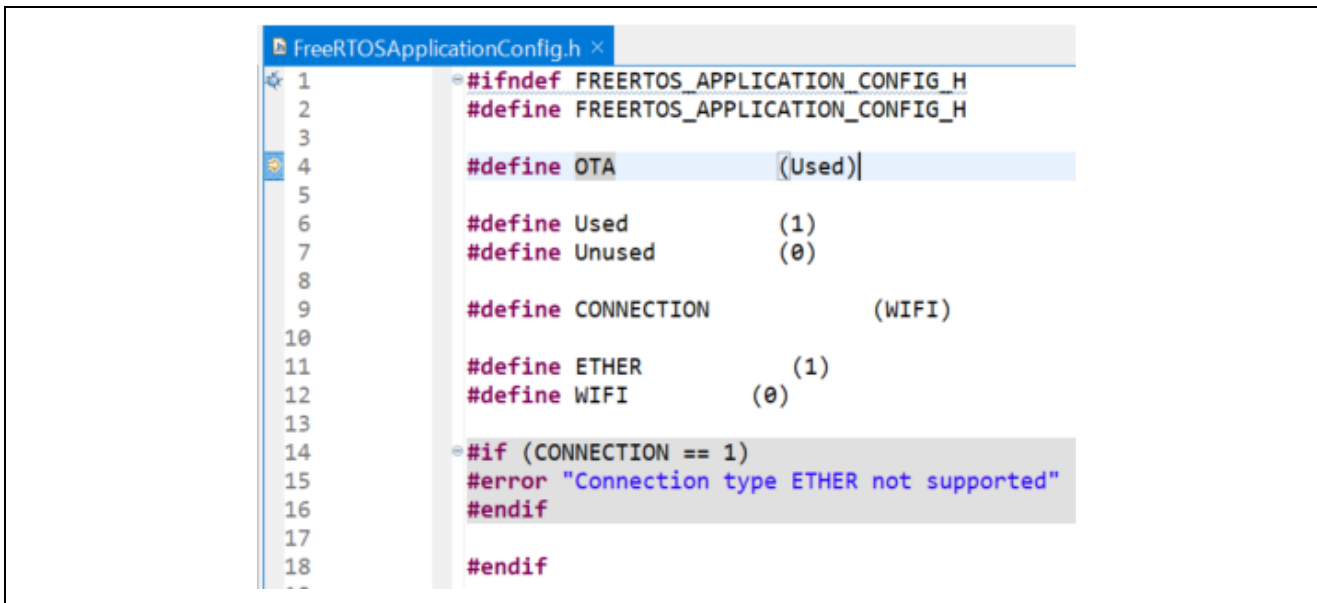

```
FreeRTOSApplicationConfig.h
1  #ifndef FREERTOS_APPLICATION_CONFIG_H
2  #define FREERTOS_APPLICATION_CONFIG_H
3
4  #define OTA (Used)
5
6  #define Used (1)
7  #define Unused (0)
8
9  #define CONNECTION (WIFI)
10
11 #define ETHER (1)
12 #define WIFI (0)
13
14 #if (CONNECTION == 1)
15 #error "Connection type ETHER not supported"
16 #endif
17
18 #endif
```

Figure 7-15 Check Setup

2. Open amazon-freertos/demos/include/ aws_application_version.h, set initial version of firmware to 0.90.

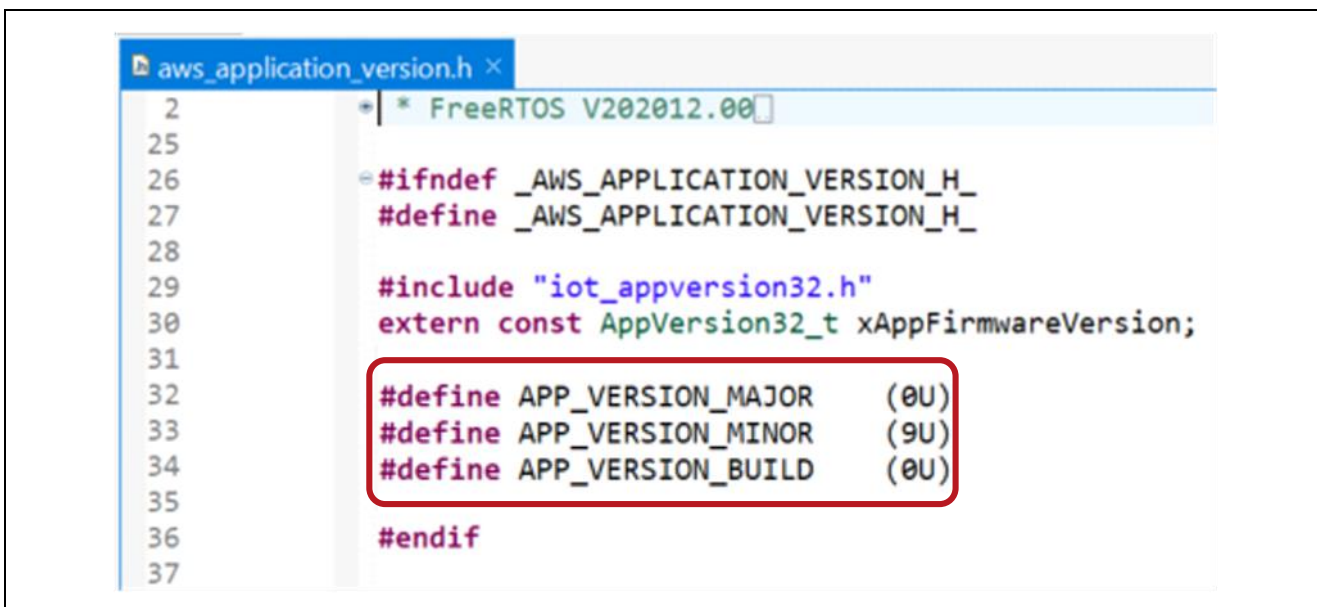

```
aws_application_version.h
2  * FreeRTOS V202012.00
25
26 #ifndef _AWS_APPLICATION_VERSION_H_
27 #define _AWS_APPLICATION_VERSION_H_
28
29 #include "iot_appversion32.h"
30 extern const AppVersion32_t xAppFirmwareVersion;
31
32 #define APP_VERSION_MAJOR (0U)
33 #define APP_VERSION_MINOR (9U)
34 #define APP_VERSION_BUILD (0U)
35
36 #endif
37
```

Figure 7-16 Firmware initial version definition

3. Open Section Viewer by selecting [Project] → [Properties] → [C / C ++ Build] → [Settings] → [Tool Settings] tab → [Linker] → [Section] → [...] and change section of aws_demos as following picture.

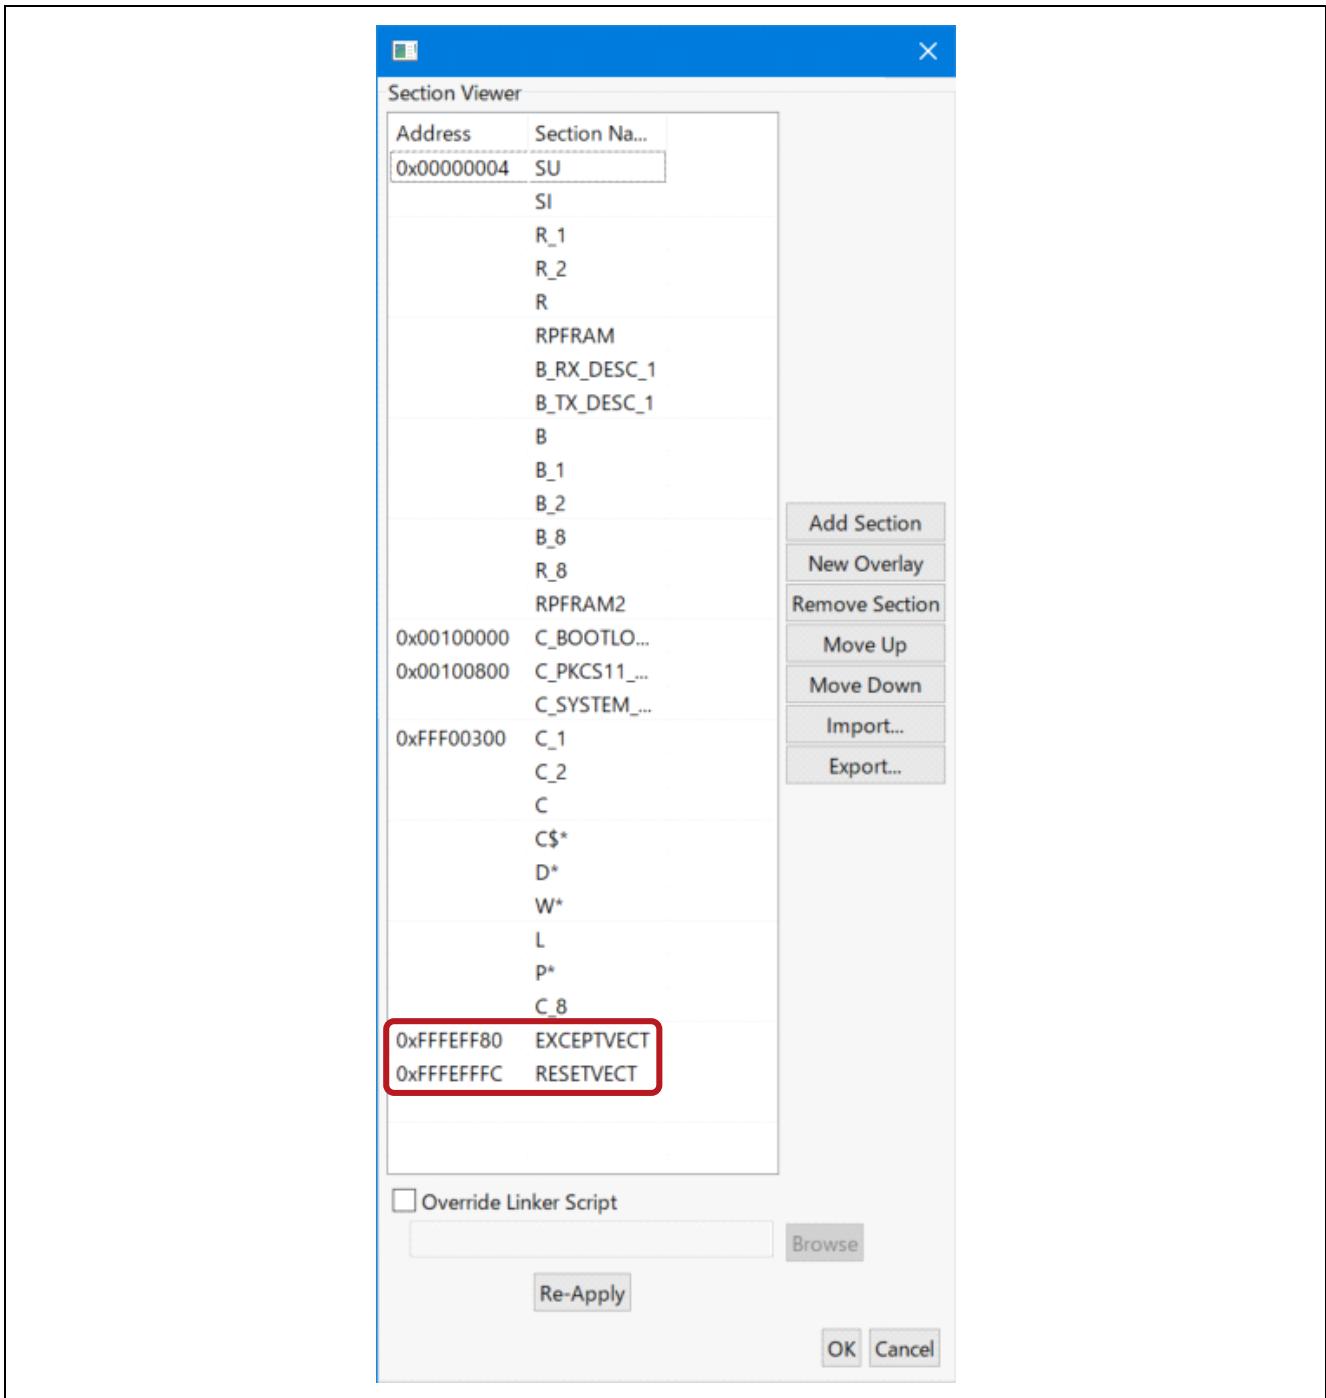


Figure 7-17 Section Settings

4. Build to create aws_demos.mot file.

5. Create userprog.mot from Renesas Secure Flash Programmer.

userprog.mot is a combination of aws_demos.mot and boot_loader.mot. Users can flash this file to RX671 PoC to install initial firmware.

Download Renesas Secure Flash Programmer release 1.0.1 and open Renesas Secure Flash Programmer.exe. Also downloads other files.

—Select [Initial Firm] tab and then set parameters as following picture.

- Private Key Path : location to secp256r1.privatekey
(¥projects¥renesas¥rx671-rsk¥e2studio¥boot_loader¥HardwareDebug)
- Boot Loader File Path : location to boot_loader.mot
(¥projects¥renesas¥rx671-rsk¥e2studio¥aws_demos¥HardwareDebug)
- Bank 0 User Program File Path : location to aws_demos.mot
(¥projects¥renesas¥rx671-rsk¥e2studio¥aws_demos¥HardwareDebug)

—Select [Generate] to generate userprog.mot and save it in the init_firmware folder. Check Generate succeeded is displayed.

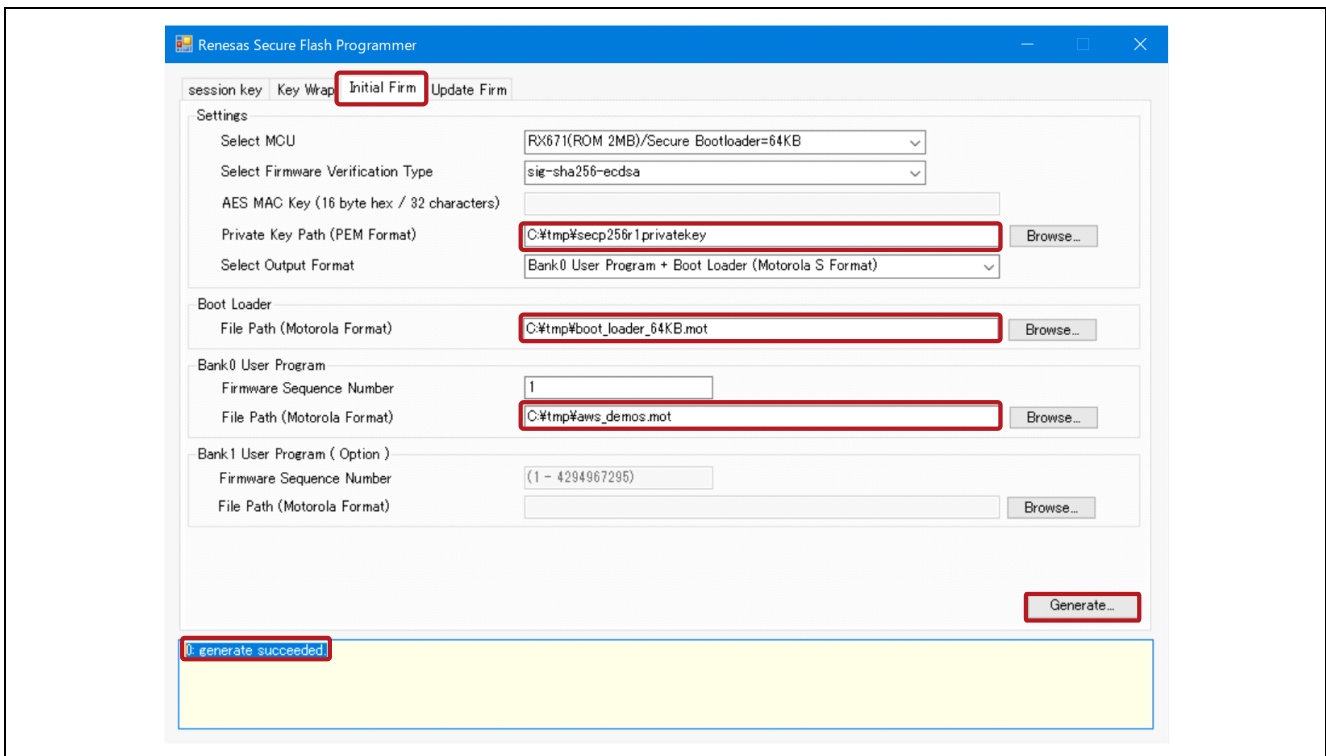


Figure 7-18 Generate userprog.mot

6. Erase the flash ROM of the RX671 PoC.

- Download the latest version of Renesas Flash Programmer below.
<https://www.renesas.com/rfp>
- Open the following project in Renesas Flash Programmer.
¥vendors¥renesas¥rx_mcu_boards¥boards¥rx671-rsk¥aws_demos¥flash_project
¥erase_from_bank¥erase.rpj
- Select [Operation] tab and click [Start] to erase the flash ROM.

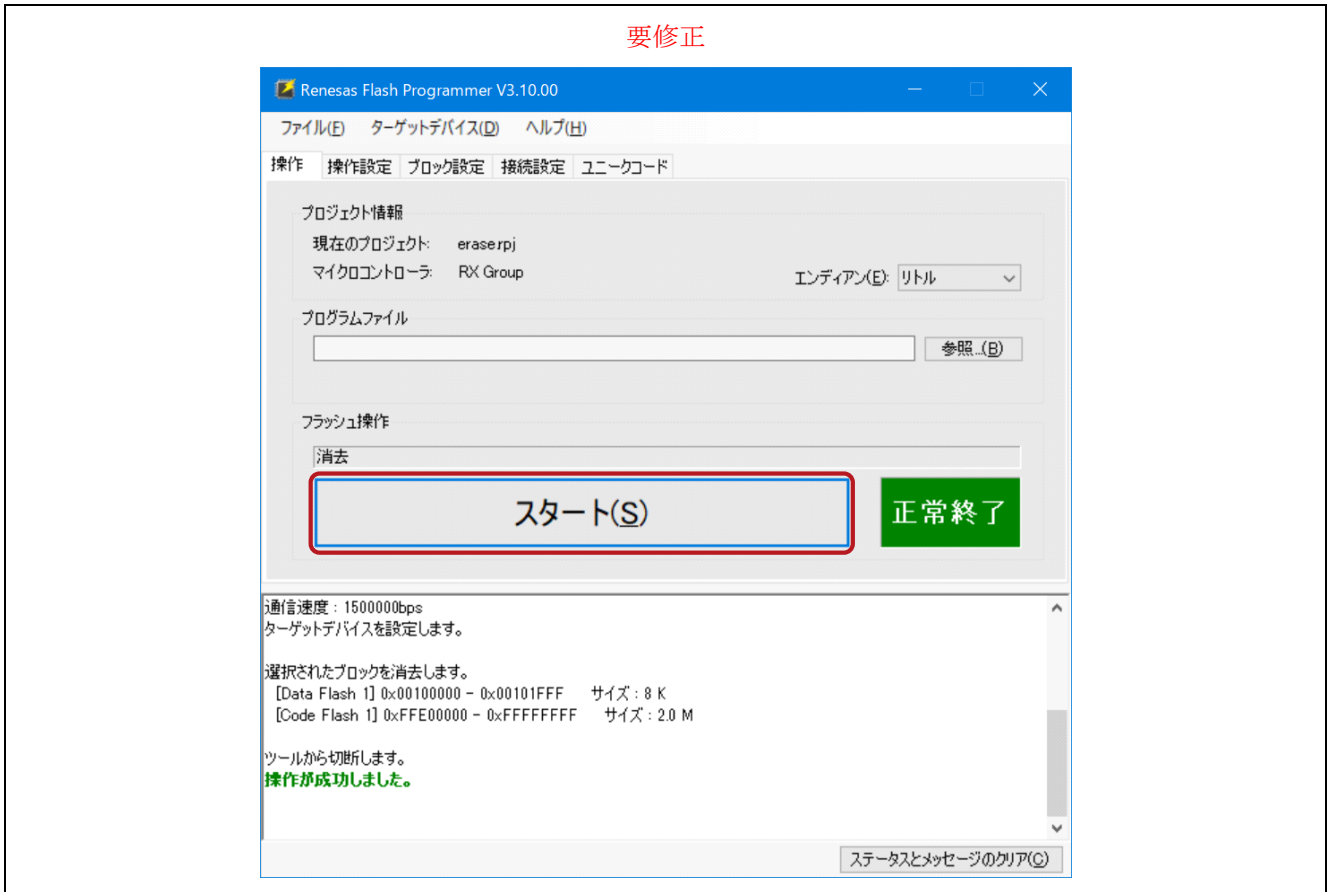


Figure 7-19 Flash ROM erase

7. Write initial firmware on RX671 PoC.

- Create a new project with Renesas Flash Programmer (Ex : flash_project.rpj)
- Select [Operation] tab and set userprog.mot stored in the init_firmware folder of the Program File.
- Click [Start].

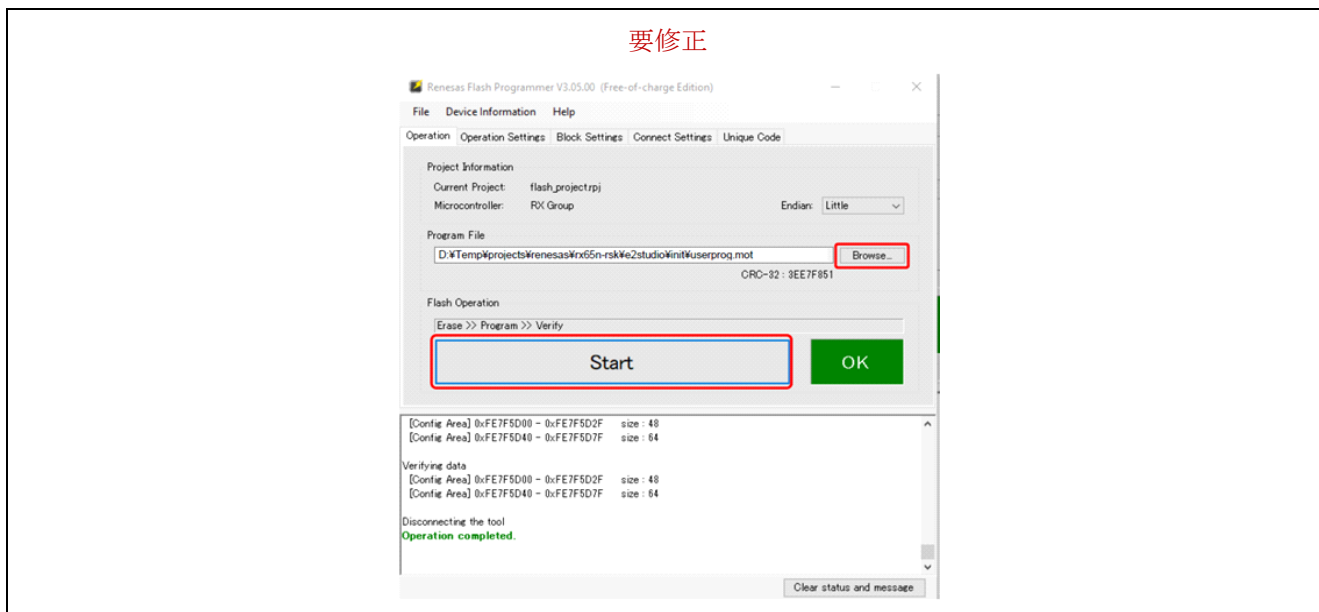


Figure 7-20 Writing initial firmware

8. Open Tera Term

The Tera Term setup is shown below.

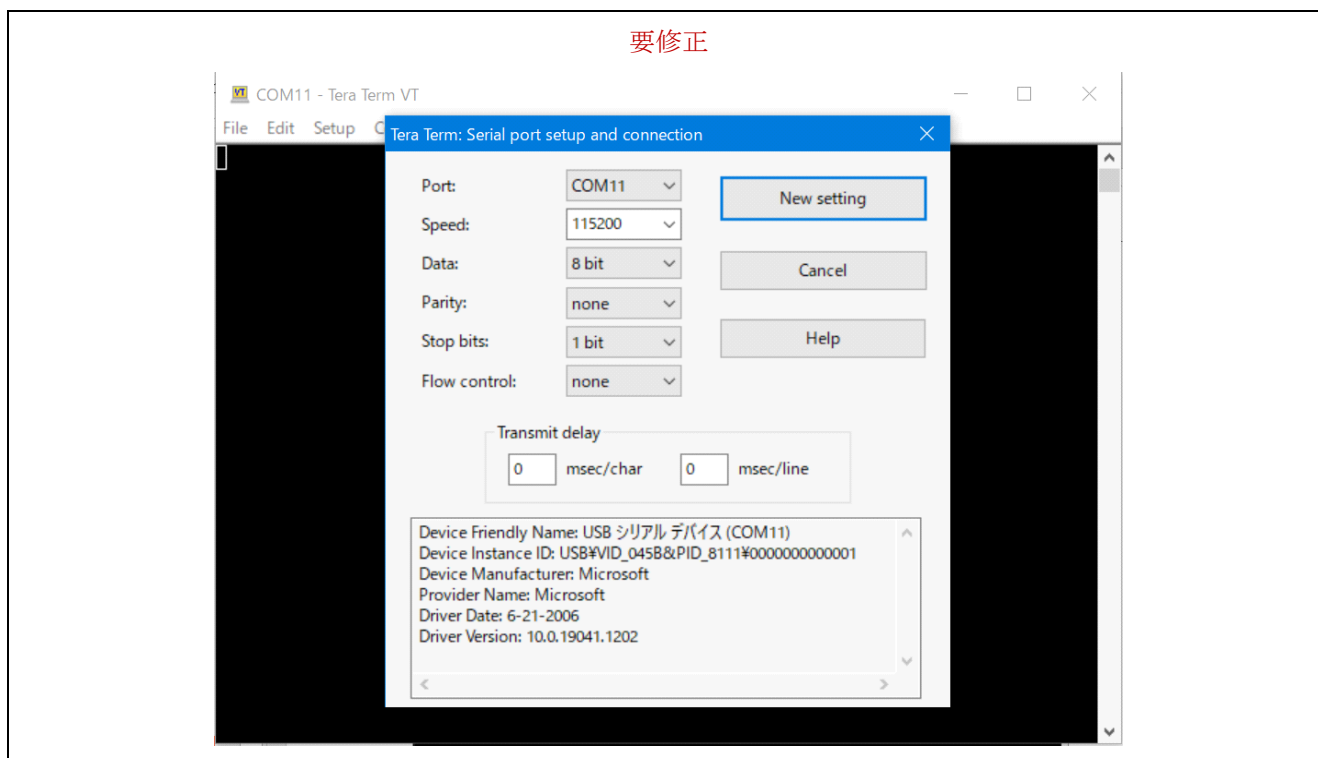


Figure 7-21 Tera Term

Version 0.90 (initial version) is installed in RX671 PoC. RX671 PoC is now ready to receive OTA updates. The output log is shown below.

```
-----
RX671 secure boot program
-----
Checking data flash ROM status.
Loading user code signer public key: not found.
provision the user code signer public key: OK.
Checking code flash ROM status.
bank 0 status = 0xfc [LIFECYCLE_STATE_INITIAL_FIRM_INSTALLED]
bank 1 status = 0xff [LIFECYCLE_STATE_BLANK]
bank info = 1. (start bank = 0)
started 10us software timer using CMT channel 0.
integrity check scheme = sig-sha256-ecdsa
bank0(execute area) on code flash integrity check...OK
erase bank1 secure boot mirror area...OK
OK
copy secure boot (part2) from bank0 to bank1...OK
jump to user program
0 83 [Tmr Svc] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:449] 1 83 [Tmr Svc] PKCS #11
module was successfully initialized.2 83 [Tmr Svc]
3 83 [Tmr Svc] [INFO] [PKCS11] [core_pkcs11_mbedtls.c:1504] 4 83 [Tmr Svc] PKCS #11
successfully initialized.5 83 [Tmr Svc]
6 83 [Tmr Svc] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:1717] 7 83 [Tmr Svc] Successfully
Returned a PKCS #11 slot with ID 1 with a count of 1.8 83 [Tmr Svc]
9 83 [Tmr Svc] [WARN] [PKCS11] [core_pkcs11_mbedtls.c:1749] 10 83 [Tmr Svc]
C_GetTokenInfo is not implemented.11 83 [Tmr Svc]
12 83 [Tmr Svc] [WARN] [PKCS11] [core_pkcs11_mbedtls.c:1839] 13 83 [Tmr Svc] C_InitToken
is not implemented.14 83 [Tmr Svc]
70 373 [Tmr Svc] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:471] 71 373 [Tmr Svc]
Successfully found object class attribute.72 373 [Tmr Svc]
```

```
73 373 [Tmr Svc] [INFO] [PKCS11] [core_pkcs11_mbedtls.c:2638] 74 373 [Tmr Svc] Creating a
0x3 type object.75 373 [Tmr Svc]
76 373 [Tmr Svc] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:2158] 77 373 [Tmr Svc]
Successfully found the key type in the template.78 374 [Tmr Svc]
79 374 [Tmr Svc] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:2187] 80 374 [Tmr Svc]
Successfully found the label in the template.81 374 [Tmr Svc]
82 374 [Tmr Svc] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:1243] 83 374 [Tmr Svc] Key was
private type.84 374 [Tmr Svc]
91 660 [Tmr Svc] [INFO] [PKCS11] [core_pkcs11_mbedtls.c:2033] 92 660 [Tmr Svc]
Successfully closed PKCS #11 session.93 660 [Tmr Svc]
94 663 [iot_thread] [INFO ][DEMO][663] -----STARTING DEMO-----

95 663 [iot_thread] [INFO ][INIT][663] SDK successfully initialized.
96 107527 [iot_thread] [INFO ][DEMO][107527] Successfully initialized the demo. Network
type for the demo: 1
97 107527 [iot_thread] [INFO ][MQTT][107527] MQTT library successfully initialized.
98 107527 [iot_thread] [INFO ][DEMO][107527] OTA demo version 0.9.0

99 107527 [iot_thread] [INFO ][DEMO][107527] Connecting to broker...

100 107527 [iot_thread] [INFO ][DEMO][107527] MQTT demo client identifier is rx671_POC
(length 9).
101 109439 [iot_thread] [WARN] [PKCS11] [core_pkcs11_mbedtls.c:1499] 102 109439
[iot_thread] Failed to initialize PKCS #11. PKCS #11 was already initialized.103 109439
[iot_thread]
104 109439 [iot_thread] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:1717] 105 109439
[iot_thread] Successfully Returned a PKCS #11 slot with ID 1 with a count of 1.106 109439
[iot_thread]
107 109439 [iot_thread] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:1953] 108 109439
[iot_thread] Assigned a 0x2 Type Session.109 109439 [iot_thread]
110 109439 [iot_thread] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:1964] 111 109439
[iot_thread] Assigned Mechanisms to no operation in progress.112 109439 [iot_thread]
113 109439 [iot_thread] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:1980] 114 109439
[iot_thread] Current session count at 0115 109439 [iot_thread]
167 111156 [iot_thread] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:1073] 168 111156
[iot_thread] Found object in list by handle.169 111156 [iot_thread]
170 111156 [iot_thread] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:3780] 171 111157
[iot_thread] Successfully started sign operation.172 111157 [iot_thread]
173 112138 [iot_thread] [DEBUG] [PKCS11] [core_pkcs11_mbedtls.c:3966] 174 112138
[iot_thread] Ended Sign operation.175 112138 [iot_thread]
176 112223 [iot_thread] [INFO ][MQTT][112223] Establishing new MQTT connection.
177 112223 [iot_thread] [INFO ][MQTT][112223] (MQTT connection 23f18, CONNECT operation
240b8) Waiting for operation completion.
178 112351 [NetRecv] [INFO] [MQTT] [core_mqtt_serializer.c:970] 179 112351 [NetRecv]
CONNACK session present bit not set.180 112351 [NetRecv]
181 112351 [NetRecv] [INFO] [MQTT] [core_mqtt_serializer.c:912] 182 112351 [NetRecv]
Connection accepted.183 112351 [NetRecv] no
184 112351 [iot_thread] [INFO ][MQTT][112351] (MQTT connection 23f18, CONNECT operation
240b8) Wait complete with result SUCCESS.
185 112351 [iot_thread] [INFO ][MQTT][112351] New MQTT connection 6a54 established.
186 112353 [iot_thread] [OTA_AgentInit_internal] OTA Task is Ready.
187 112353 [OTA Agent T] [prvPAL_GetPlatformImageState] is called.
188 112353 [OTA Agent T] Function call: prvPAL_GetPlatformImageState: [2]
189 112353 [OTA Agent T] [prvExecuteHandler] Called handler. Current State [Ready] Event
[Start] New state [RequestingJob]
190 112358 [OTA Agent T] [INFO ][MQTT][112358] (MQTT connection 23f18) SUBSCRIBE
operation scheduled.
191 112358 [OTA Agent T] [INFO ][MQTT][112358] (MQTT connection 23f18, SUBSCRIBE
operation 2a960) Waiting for operation completion.
192 112473 [OTA Agent T] [INFO ][MQTT][112473] (MQTT connection 23f18, SUBSCRIBE
operation 2a960) Wait complete with result SUCCESS.
193 112473 [OTA Agent T] [prvSubscribeToJobNotificationTopics] OK:
$/aws/things/rx671_POC/jobs/$next/get/accepted
194 112478 [OTA Agent T] [INFO ][MQTT][112478] (MQTT connection 23f18) SUBSCRIBE
operation scheduled.
195 112478 [OTA Agent T] [INFO ][MQTT][112478] (MQTT connection 23f18, SUBSCRIBE
operation 241f8) Waiting for operation completion.
```

```
196 112585 [OTA Agent T] [INFO ][MQTT][112585] (MQTT connection 23f18, SUBSCRIBE
operation 241f8) Wait complete with result SUCCESS.
197 112585 [OTA Agent T] [prvSubscribeToJobNotificationTopics] OK:
$aws/things/rx671_POC/jobs/notify-next
198 112585 [OTA Agent T] [prvRequestJob_Mqtt] Request #0
199 112594 [OTA Agent T] [INFO ][MQTT][112594] (MQTT connection 23f18) MQTT PUBLISH
operation queued.
200 112594 [OTA Agent T] [INFO ][MQTT][112594] (MQTT connection 23f18, PUBLISH operation
241f8) Waiting for operation completion.
201 112670 [OTA Agent T] [INFO ][MQTT][112670] (MQTT connection 23f18, PUBLISH operation
241f8) Wait complete with result SUCCESS.
202 112670 [OTA Agent T] [prvExecuteHandler] Called handler. Current State
[RequestingJob] Event [RequestJobDocument] New state [WaitingForJob]
203 112672 [OTA Agent T] [prvParseJSONbyModel] Extracted parameter [ clientToken:
0:rx671_POC ]
204 112672 [OTA Agent T] [prvParseJSONbyModel] Extracted parameter [ timestamp:
1662611090 ]
205 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: execution
206 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: jobId
207 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: jobDocument
208 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: afr_ota
209 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: protocols
210 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: files
211 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: filepath
212 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: filesize
213 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: fileid
214 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: certfile
215 112672 [OTA Agent T] [prvParseJSONbyModel] parameter not present: sig-sha256-ecdsa
216 112672 [OTA Agent T] [prvParseJobDoc] No active jobs available in the service for
execution.
217 112674 [OTA Agent T] [prvParseJobDoc] Ignoring job without ID.
222 113353 [iot_thread] [INFO ][DEMO][113353] State: Ready Received: 1 Queued: 0
Processed: 0 Dropped: 0

223 114353 [iot_thread] [INFO ][DEMO][114353] State: WaitingForJob Received: 1 Queued:
0 Processed: 0 Dropped: 0

224 115353 [iot_thread] [INFO ][DEMO][115353] State: WaitingForJob Received: 1 Queued:
0 Processed: 0 Dropped: 0

225 116353 [iot_thread] [INFO ][DEMO][116353] State: WaitingForJob Received: 1 Queued:
0 Processed: 0 Dropped: 0

226 117353 [iot_thread] [INFO ][DEMO][117353] State: WaitingForJob Received: 1 Queued:
0 Processed: 0 Dropped: 0

227 118353 [iot_thread] [INFO ][DEMO][118353] State: WaitingForJob Received: 1 Queued:
0 Processed: 0 Dropped: 0
```

8. Restriction

This section describes restriction for this application note.

- FreeRTOS OTA programs with big endian operate abnormally.
Build and operate programs with little endian.

9. Reference Documents

- RX671Group User's Manual: Hardware (R01UH0905)
- Renesas Starter Kit+ for RX671User's Manual (R20UT4879)
- RX Family Using QE and FIT to Develop Capacitive Touch Applications (R01AN4516)
- RX Family QE for Display GUI Display Application Development Guide using Serial Connection LCD (R20AN0688)
- Renesas MCU Firmware Update Design Policy (R01AN5548)
- How to implement FreeRTOS OTA by using Amazon Web Services on RX65N (R01AN5549)

The latest version can be downloaded from the Renesas Electronics website.

All trademarks and registered trademarks are the property of their respective owners.

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Apr.24.23	-	First edition

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Precaution against Electrostatic Discharge (ESD)

A strong electrical field, when exposed to a CMOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop the generation of static electricity as much as possible, and quickly dissipate it when it occurs. Environmental control must be adequate. When it is dry, a humidifier should be used. This is recommended to avoid using insulators that can easily build up static electricity.

Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors must be grounded. The operator must also be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions must be taken for printed circuit boards with mounted semiconductor devices.

2. Processing at power-on

The state of the product is undefined at the time when power is supplied. The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the time when power is supplied. In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the time when power is supplied until the reset process is completed. In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the time when power is supplied until the power reaches the level at which resetting is specified.

3. Input of signal during power-off state

Do not input signals or an I/O pull-up power supply while the device is powered off. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Follow the guideline for input signal during power-off state as described in your product documentation.

4. Handling of unused pins

Handle unused pins in accordance with the directions given under handling of unused pins in the manual. The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of the LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible.

5. Clock signals

After applying a reset, only release the reset line after the operating clock signal becomes stable. When switching the clock signal during program execution, wait until the target clock signal is stabilized. When the clock signal is generated with an external resonator or from an external oscillator during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Additionally, when switching to a clock signal produced with an external resonator or by an external oscillator while program execution is in progress, wait until the target clock signal is stable.

6. Voltage application waveform at input pin

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between V_{IL} (Max.) and V_{IH} (Min.) due to noise, for example, the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between V_{IL} (Max.) and V_{IH} (Min.).

7. Prohibition of access to reserved addresses

Access to reserved addresses is prohibited. The reserved addresses are provided for possible future expansion of functions. Do not access these addresses as the correct operation of the LSI is not guaranteed.

8. Differences between products

Before changing from one product to another, for example to a product with a different part number, confirm that the change will not lead to problems. The characteristics of a microprocessing unit or microcontroller unit products in the same group but having a different part number might differ in terms of internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/.