

Contents

1	Introduction	2
2	Oscillator Frequency Requirements and Recommendations	2
3	Oscillator Adjustment.....	3
3.1.	Oscillator Adjustment using the ZSSC3154 Evaluation Kit	3
3.2.	Oscillator Adjustment using the SSC Terminal Program.....	4
4	Related Documents	6
5	Glossary	6
6	Document Revision History	6

List of Tables

Table 3.1	Steps for Adjusting the Internal Oscillator Frequency f_{OSC} with the Evaluation Kit.....	3
Table 3.2	Steps for Adjusting the Internal Oscillator Frequency f_{OSC} with the SSC Terminal Program	5

1 Introduction

This application note explains the procedure for the oscillator frequency adjustment and additional considerations regarding the effects of the adjustment. The ZSSC3154 Sensor Signal Conditioner IC has a feature for internal oscillator frequency (f_{OSC}) adjustment via EEPROM configuration settings. The recommended frequency range is from 2.6MHz to 3.2MHz range which enables and provides full performance of the ZSSC3154.

2 Oscillator Frequency Requirements and Recommendations

Minimum recommended oscillator frequency of 2.6MHz guarantees the 1ms response time and 1kHz bandwidth as specified for the ZSSC3154 sensor signal conditioner for both simple and complex measurements, including advanced diagnostics. To achieve low noise ADC conversion, the maximum oscillator frequency of 3.2MHz should not be exceeded. Above this frequency the analog output signal may deteriorate as well.

The maximum adjustment step is guaranteed according to the test limit of 200kHz. The target frequency can be adjusted with an accuracy of 125 kHz, over the operational temperature range. Within the operational voltage range, it can deviate by an additional 35 kHz. Therefore, the adjustment accuracy is better than 6% for oscillator frequencies greater than 2.6MHz. Overall the target frequency can be expected to have accuracy of 10%.

The oscillator frequency affects the ZSSC3154 calibration microcontroller (CMC) performance and therefore the following system parameters: Startup time duration, response time, sample rate, supply current, A/D conversion time, start-up time, Power-on diagnostic output duration ¹ T_{PDO} (see the *ZSSC3154 Functional Description* for details), I²C™ interfaces ^{2, 3} (interface timing specification conditions are $f_{OSC} \geq 2\text{MHz}$), OWI interface 3 and start condition (interface timing specification conditions are $f_{OSC} \geq 2\text{MHz}$), sequential Analog Output Mode duration 1 T_{SEQ} for a given phase of the sequential output and command processing time

EEPROM programming duration is typically 12.5ms and is independent of the programmed clock frequency.

The oscillator frequency can be finely adjusted in the recommended range of 2.6MHz (minimum) with a maximum of 3.2MHz.

The configuration word *CFGAPP2* (EEPROM/RAM address 16_{HEX}) is used to adjust f_{OSC} :

Bits 0:3 (OSCADJ: adjust frequency f_{OSC} of internal oscillator)

Bit 4 (OSCSS: enable Oscillator Spread Spectrum Mode)

Using the Oscillator Spread Spectrum Mode reduces electromagnetic emission (EME).

¹ Timing can be shortened by adjusting the divider CFGAPP:TIMEDIV (configuration word at EEPROM/RAM address 15_{HEX}).

² I²C™ is a trademark of NXP.

³ Internal clock frequency f_{OSC} must be at least 5 times higher than the communication clock frequency.

3 Oscillator Adjustment

The steps below describe the sequence for f_{OSC} adjustment. The objective is to determine the actual oscillator frequency and to adjust it as needed to meet design specifications.

As an example, the target frequency is $f_{OSC} = 2.6\text{MHz}$ for the steps below.

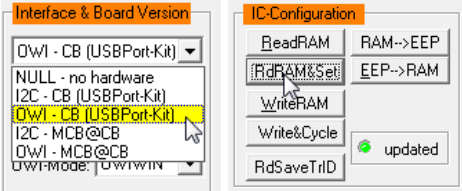

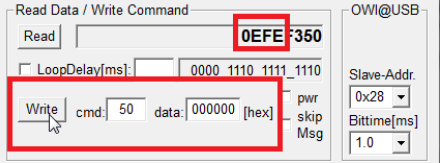
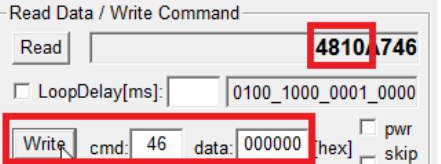
Preliminary settings:


- Slave address is 28_{HEX} .
- OWI bit time is 1ms ($f_{OWI} = 1\text{kHz}$).
- Oscillator adjustment bits [0:3] in CFGAPP2:OSCADJ are 0000_{BIN} for maximum frequency and 1111_{BIN} for minimum frequency.
- Target for the frequency adjustment for this example is 2.6MHz .

3.1. Oscillator Adjustment using the ZSSC3154 Evaluation Kit

The ZSSC3154 Evaluation Kit can be used to provide hardware and a graphical user interface (GUI) to communicate with the ZSSC3154 to adjust f_{OSC} . Before attempting the oscillator adjustment procedures in Table 3.1, refer to the *ZSSC3154 Evaluation Kit Description* for full instructions for using the kit.

Table 3.1 Steps for Adjusting the Internal Oscillator Frequency f_{OSC} with the Evaluation Kit

Step	Procedure	Evaluation Kit GUI Display
#1	Establish OWI communication from the main window. Command Mode is activated automatically. Read and set the IC RAM configuration in to the GUI software.	
#2	In the top menu, click the  icon or select "Calibration" and then "Send Command" to access the "Send Command" window. Acquire the frequency ratio ($f_{\text{RATIO}} = f_{\text{OSC}} / f_{\text{OWI}}$) by sending the command 50_{HEX} (ADJ_OSC_ACQ). The software automatically reads four bytes for which the first two bytes are the ratio result (0EFE_{HEX} in adjacent example).	
#3	Read the CFGAPP2 register via the RAM-EEPROM dialog or by sending the command 46_{HEX} (READ_EEP for address 16_{HEX}). Bits [0:3] contain the present oscillator adjustment setting: 0000_{BIN} , which corresponds to the maximum f_{OSC} setting 3.838MHz .	
#4	Convert the f_{RATIO} readout (0EFE_{HEX} for this example) to decimal (3838_{DEC}) and calculate the oscillator frequency with $f_{\text{OWI}} = 1\text{kHz}$.	$f_{\text{RATIO}} = \frac{f_{\text{OSC}}}{f_{\text{OWI}}}$ $f_{\text{OSC}} = f_{\text{OWI}} * f_{\text{RATIO}} = 1\text{kHz} * 3838 = 3.838\text{MHz}$

Step	Procedure	Evaluation Kit GUI Display
#5	Calculate the steps count for frequency adjustment to target frequency of 2.6MHz for this example. Average step size is approximately 125kHz.	Steps = $\frac{f_{OSC} - f_{TARGET}}{125kHz} = \frac{3.838MHz - 2.6MHz}{125kHz} = 9.9 \approx 10_{DEC} = A_{HEX}$
#6	Add the result to the existing oscillator adjustment settings and generate the new CFGAPP2 register content.	$0_{HEX} + A_{HEX} = A_{HEX}$ CFGAPP2 _{NEW} → 481A _{HEX}
#7	Write the new CFGAPP2 register content to the EEPROM using the RAM-Register dialog or click the WriteRAM and RAM->EEP buttons on the main screen. The enable for EEPROM writing and signature generation are done automatically by the GUI software.	 The screenshot shows a table with columns labeled 'u', '2b', and '14'. The rows are labeled '8', '9', 'A', and 'B'. The values in the '2b' column are 0, 481A, 4000, and EA20. To the right of the table is a control panel titled 'IC-Configuration' with buttons for 'ReadRAM', 'RAM->EEP', 'RdRAM&Set', 'EEP->RAM', and 'WriteRAM'.

3.2. Oscillator Adjustment using the SSC Terminal Program

An alternate method of adjusting f_{OSC} is to use the SSC Terminal Program, which is available for download from www.IDT.com/ZSSC3154KIT.

The SSC Terminal Program enables sending commands to the ZSSC3154 using the OWI interface. Table 3.2 gives the steps for adjusting f_{OSC} using the commands in the adjacent columns.¹ Refer to *SSC Command Syntax* for more information about interface commands. This spreadsheet is included with the SSC Terminal Program download.

¹ Commands can also be sent using the ZSSC3154 Evaluation Kit.

Table 3.2 Steps for Adjusting the Internal Oscillator Frequency f_{OSC} with the SSC Terminal Program

Step	Procedure	Command (HEX)	Data (HEX)	Terminal Program syntax1	Result (HEX)
#1	Reset the CB and trigger the power supply at next command.			r tso31150 os_14 t11030	
#2	Establish OWI communication and enter the Command Mode by sending the START_CM command.	72	74	OWT280027274	C372 _{HEX} upon success
#3	Acquire frequency ratio f_{RATIO} (the longer the OWI bit time is, the more accurate the result will be). Convert the f_{RATIO} readout (OEFE _{HEX} for this example) to decimal (3838 _{DEC}) and calculate the f_{OSC} oscillator frequency with $f_{OWI} = 1\text{kHz}$.	50	-	OW_2800150 OR_28002	$f_{OSC} = f_{OWI} * f_{RATIO}$ $f_{OSC} = 1\text{kHz} * 3838_{DEC}$ $= 3.838\text{MHz}$
#4	Read the CFGAPP2 register to determine the present setting for OSCADJ by sending the command 46 _{HEX} (READ_EEP for address 16 _{HEX}).	46	-	OW_2800146 OR_28002	Result: 4810 _{HEX} OSCADJ = 0000 _{BIN} (presently set for maximum frequency, which is 3.838MHz) OSCSSL = 1 _{BIN} (Spread Spectrum Mode Enabled)
#5	Adjust to the target frequency of 2.6MHz from 3.838MHz by setting OSCADJ to 10 steps (A _{HEX}) as calculated in Table 3.1.	65	481A	OW_2800365481A	OSCADJ = 0 _{HEX} + A _{HEX} CFGAPP2 = 481A _{HEX}
#6	Enable data write to EEPROM	6C	F742	OW_280036CF742	C36C _{HEX} upon success
#7	Write CFGAPP2 _{new} to EEPROM at address 16 _{HEX} .	B6	481A	OW_28003B6481A	
#8	Generate and write EEPROM signature by sending the GEN_EEP_SIGN command.	C9	-	OW_28001C9	

4 Related Documents

Document
ZSSC3154 Data Sheet
ZSSC3154 Functional Description
SSC Command Syntax
ZSSC3154 Evaluation Kit Description

Visit www.IDT.com/ZSSC3154 and www.IDT.com/3154KIT or contact your nearest sales office for the latest version of these documents.

5 Glossary

Term	Description
CMC	Calibration Microcontroller
EME	Electromagnetic Emission
OWI	One-Wire Interface

6 Document Revision History

Revision	Date	Description
1.00	August 28, 2013	First release
	April 1, 2016	Changed to IDT branding.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.