
ISL70517SEH, ISL70617SEHNeutron Test Report

Introduction

This report summarizes results of 1MeV equivalent neutron testing of the [ISL70517SEH](#) and [ISL70617SEH](#) instrumentation amplifiers. The test was conducted to determine the sensitivity of the part to Displacement Damage (DD) caused by neutron or proton environments. Neutron fluences ranged from $5 \times 10^{11} \text{n/cm}^2$ to $1 \times 10^{14} \text{n/cm}^2$. This project was carried out in collaboration with Honeywell Aerospace in Clearwater, FL, and their support is gratefully acknowledged.

Product Description

The ISL70517SEH is a differential input, single-ended output instrumentation amplifier designed for precision analog to digital applications. The ISL70617SEH is a differential input, differential output instrumentation amplifier, differing only in a metal mask option.

Both parts operate across a supply range of 8V ($\pm 4\text{V}$) to 36V ($\pm 18\text{V}$) and feature a differential input voltage range of $\pm 30\text{V}$. The output stages have rail-to-rail output drive capability optimized for ADC driver applications. The gain of the ISL70x17SEH can be programmed from 0.1 to 10,000 using two external resistors, RIN and RFB. The gain accuracy is determined by the matching of RIN and RFB. The gain resistors use Kelvin sensing, which removes gain error terms due to PC trace resistance. The input and output stages have individual power supply pins, which enable input signals riding on a high common-mode voltage to be level shifted to a low voltage device, such as an A/D converter. The rail-to-rail output stage can be powered from the same supplies as the ADC, which preserves the ADC maximum input dynamic range and eliminates ADC input overdrive. The ISL70x17SEH is offered in a 24 Ld ceramic flatpack package and is ensured across the -55°C to $+125^\circ\text{C}$ temperature range.

Specifications for Rad Hard QML devices are controlled by the Defense Logistics Agency (DLA) in Columbus, OH. The SMD is the controlling document and must be cited when ordering.

Related Literature

For a full list of related documents, visit our website:

- [ISL70517SEH](#), [ISL70617SEH](#) device pages
- MIL-STD-883 test method 1017

1. Test Description

1.1 Irradiation Facility

Neutron fluence irradiations were performed on the test samples on June 25, 2018, at the WSMR Fast Burst Reactor (FBR) per Mil-STD-883G, Method 1017.2, with each part unpowered during irradiation and all leads shorted. The target irradiation levels were $5 \times 10^{11} \text{n/cm}^2$, $2 \times 10^{12} \text{n/cm}^2$, $1 \times 10^{13} \text{n/cm}^2$, and $1 \times 10^{14} \text{n/cm}^2$. As neutron irradiation activates many of the heavier elements found in a packaged integrated circuit, the parts exposed at the higher neutron levels required (as expected) some cool down time before being shipped back to Renesas (Palm Bay, FL) for electrical testing.

1.2 Test Fixturing

No formal irradiation test fixturing is involved, as these DD tests are considered bag tests, which means the parts are irradiated with all leads shorted together.

1.3 Radiation Dosimetry

[Table 1](#) shows the TLD and Sulfur pellet dosimetry from WSMR indicating the total accumulated gamma dose and actual neutron fluence exposure levels for each set of ISL70517SEH samples. [Table 2](#) shows the same parameters for the ISL70617SEH. This dosimetry process is traceable to NIST (IAW ASTM E722).

Table 1. ISL70517SEH Neutron Fluence Dosimetry Data

TLD		Sulfur Pellet						
TLD #	cGy(Si)	Pellet #	Distance (inches)	Exposure ID	Flu >3MeV (n/cm ²)	% Unc	Total Fluence (n/cm ²)	1Mev Si (n/cm ²)
289	1.223E+02	6475	26.6	Free Field	7.465E+10	7.1%	6.036E+11	5.192E+11
279	4.304E+02	6415	13.45	Free Field	3.067E+11	7.1%	2.419E+12	2.145E+12
259	2.242E+03	6484	24	Free Field	1.375E+12	7.1%	1.079E+13	9.642E+12
257	1.562E+04	6481	8	Free Field	9.879E+12	7.1%	7.755E+13	6.927E+13

Table 2. ISL70617SEH Neutron Fluence Dosimetry Data

TLD		Sulfur Pellet						
TLD #	cGy(Si)	Pellet #	Distance (inches)	Exposure ID	Flu >3MeV (n/cm ²)	% Unc	Total Fluence (n/cm ²)	1Mev Si (n/cm ²)
295	1.170E+02	6120	26.6	Free Field	7.750E+10	7.1%	6.267E+11	5.390E+11
277	4.028E+02	6413	13.45	Free Field	2.883E+11	7.1%	2.274E+12	2.017E+12
264	2.022E+03	6489	24	Free Field	1.378E+12	7.1%	1.105E+13	9.567E+12
255	1.677E+04	6470	8	Free Field	1.097E+13	7.1%	8.610E+13	7.692E+13

Notes:

- 1cGy(Si) = 1rad(Si)
- The Uncertainty (% Unc) column is applicable only to the Fluence > 3MeV.

1.4 Characterization Equipment and Procedures

Electrical testing was performed before and after irradiation using the Intersil production Automated Test Equipment (ATE). All electrical testing was performed at room temperature.

1.5 Experimental Matrix

Testing proceeded in general accordance with the guidelines of MIL-STD-883 TM 1017. The planned experimental matrix consisted of five samples irradiated at $5 \times 10^{11} \text{n/cm}^2$, five samples irradiated at $2 \times 10^{12} \text{n/cm}^2$, five irradiated at $1 \times 10^{13} \text{n/cm}^2$, and five irradiated at $1 \times 10^{14} \text{n/cm}^2$. Three control units were used.

ISL70517SEH samples were drawn from Lot X4JADA. ISL70617SEH samples were taken from Lot X4J4ABBA. All samples were packaged in the standard hermetic 24 Ld ceramic flatpack, Package Outline Drawing (POD) K24.A. Samples were processed through burn-in before irradiation and were screened to the SMD limits at room, low, and high temperatures before the start of neutron testing.

2. Results

Neutron testing of the ISL70x17SEH is complete and the results are reported in the balance of this report. It should be understood when interpreting the data that each neutron irradiation was performed on a different set of samples; this is *not* total dose testing, where the damage is cumulative.

2.1 Attributes Data

[Table 3](#) summarizes the neutron exposure test results. The maximum planned fluence of $1 \times 10^{14} \text{n/cm}^2$ was not quite achieved, with the actual maximum fluence only reaching $6.93 \times 10^{13} \text{n/cm}^2$ for the ISL70517SEH and $7.70 \times 10^{13} \text{n/cm}^2$ for the ISL70617SEH.

Table 3. ISL70517SEH and ISL70617SEH Attributes Data

Fluence, (n/cm ²)			Sample Size	Pass (Note 3)	Fail
Planned	ISL70517SEH Actual	ISL70617SEH Actual			
5×10^{11}	5.20×10^{11}	5.40×10^{11}	5	5	0
2×10^{12}	2.20×10^{12}	2.02×10^{12}	5	5	0
1×10^{13}	9.64×10^{12}	9.60×10^{12}	5	5	0
1×10^{14}	6.93×10^{13}	7.70×10^{13}	5	0	5

Note:

3. A Pass indicates a sample that passes all SMD limits.

2.2 Variables Data

The plots in [Figures 1](#) through [30](#) show data plots for key parameters before and after irradiation to each level. The plots show the mean of each parameter as a function of neutron irradiation. The plots also include error bars at each datapoint, representing the minimum and maximum measured values of the samples, although in some plots the error bars might not be visible due to their values compared to the scale of the graph. While the applicable electrical limits taken from the SMD are also shown, it should be noted that these limits are provided for guidance only as the ISL70x17SEH is not specified for the neutron environment.

All samples passed the post-irradiation SMD limits after all exposures up to and including $1 \times 10^{13} \text{n/cm}^2$, but failed many of the SMD post-irradiation limits after $1 \times 10^{14} \text{n/cm}^2$, although they were still functional.

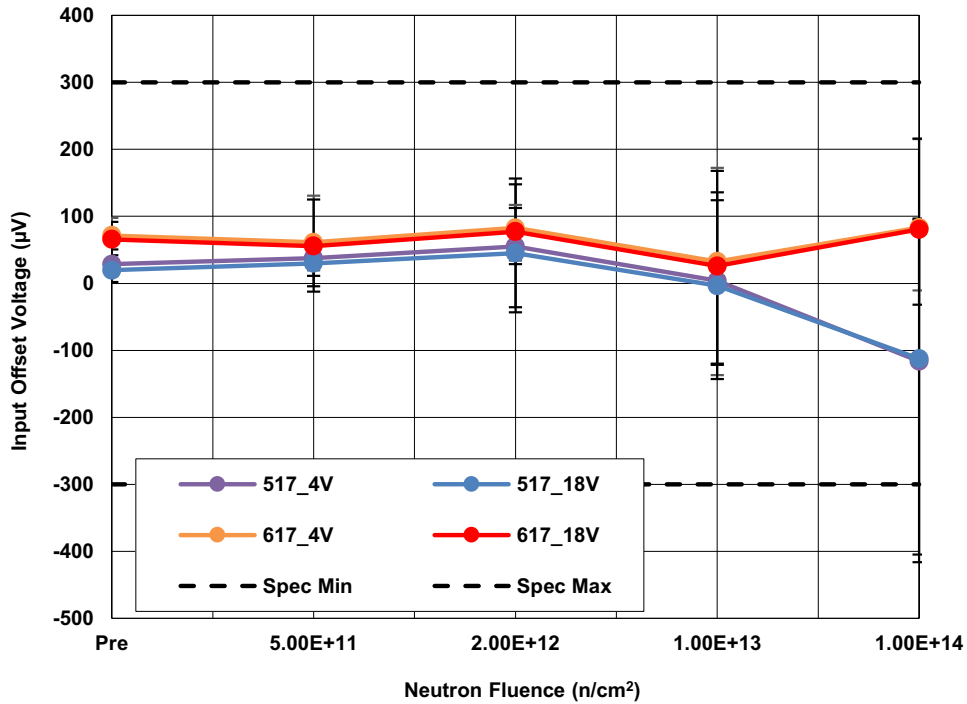


Figure 1. ISL70x17SEH input offset voltage (V_{OS}) at $\pm 4V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are $-300\mu V$ minimum and $300\mu V$ maximum.

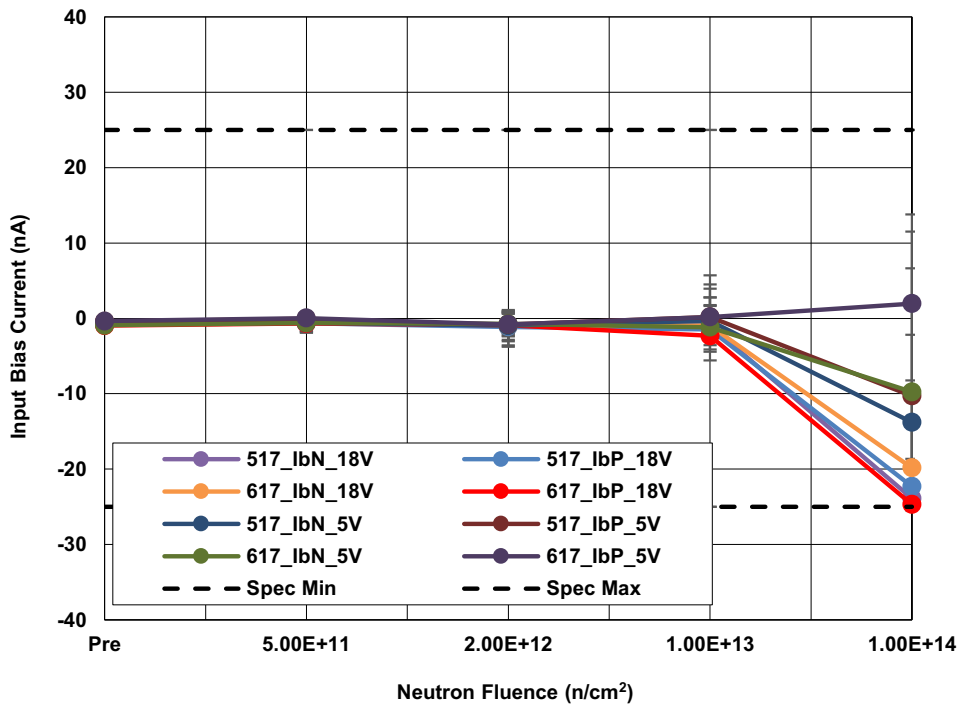


Figure 2. ISL70x17SEH input bias current (I_B) at $\pm 5V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are $-25nA$ minimum and $25nA$ maximum.

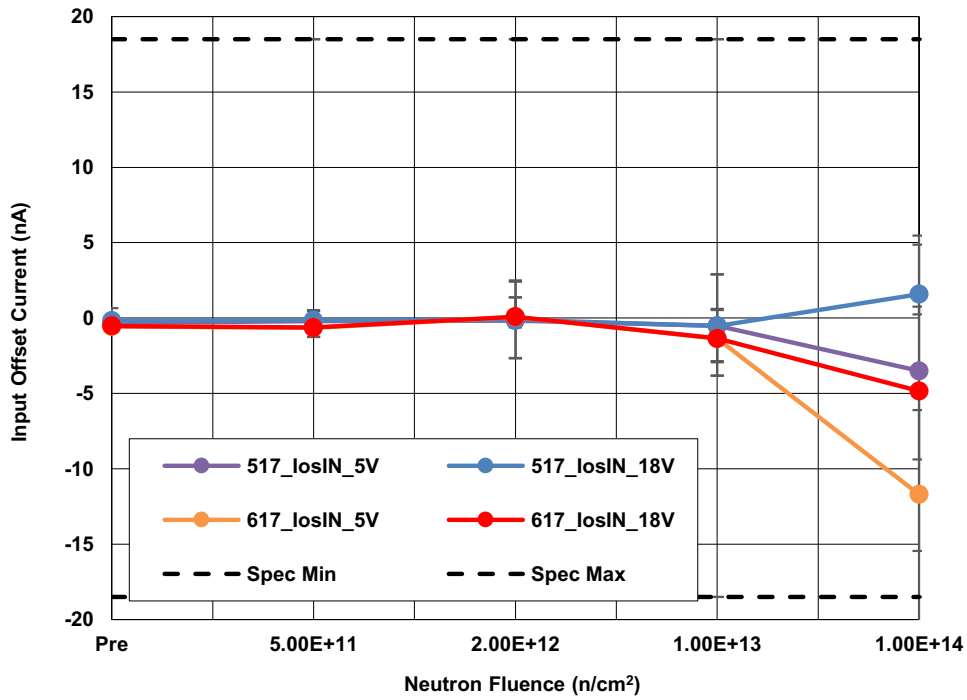


Figure 3. ISL70x17SEH input offset current (I_{OS}) at $\pm 5V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are $-18.5nA$ minimum and $18.5nA$ maximum.

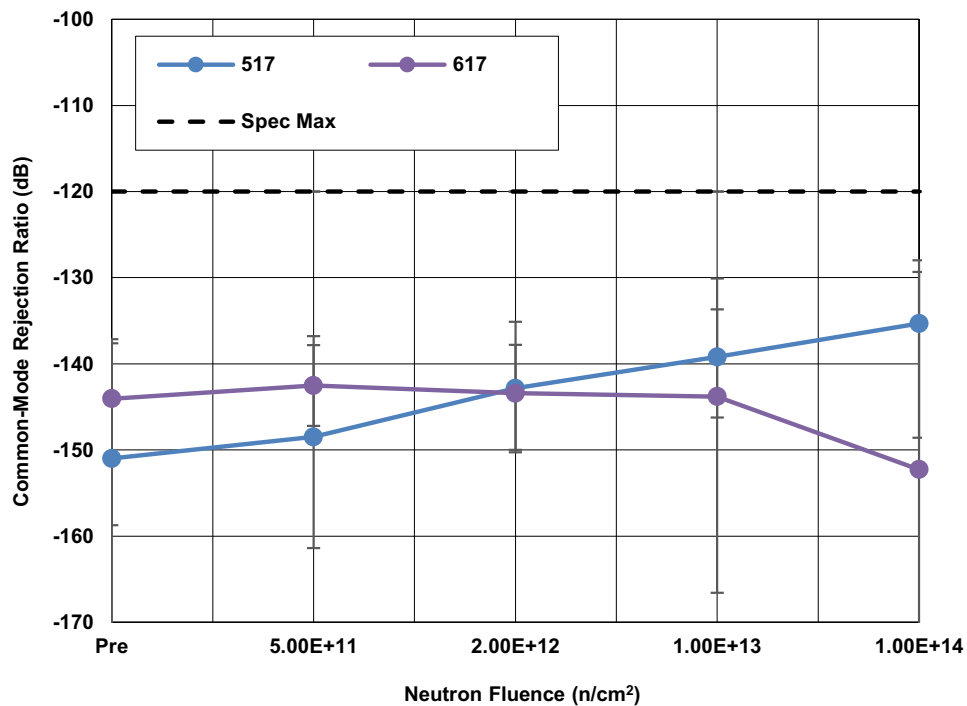


Figure 4. ISL70x17SEH common-mode rejection ratio (CMRR) with Gain = 100, following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is $-120dB$ maximum.

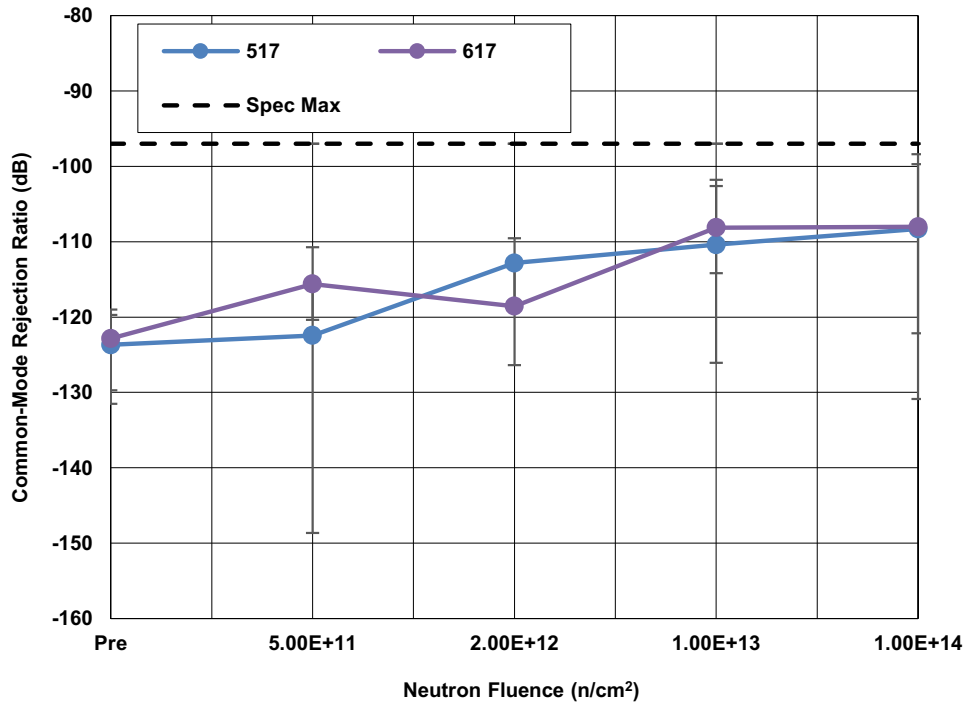


Figure 5. ISL70x17SEH common mode rejection ratio (CMRR) with Gain = 1, following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -97dB maximum.

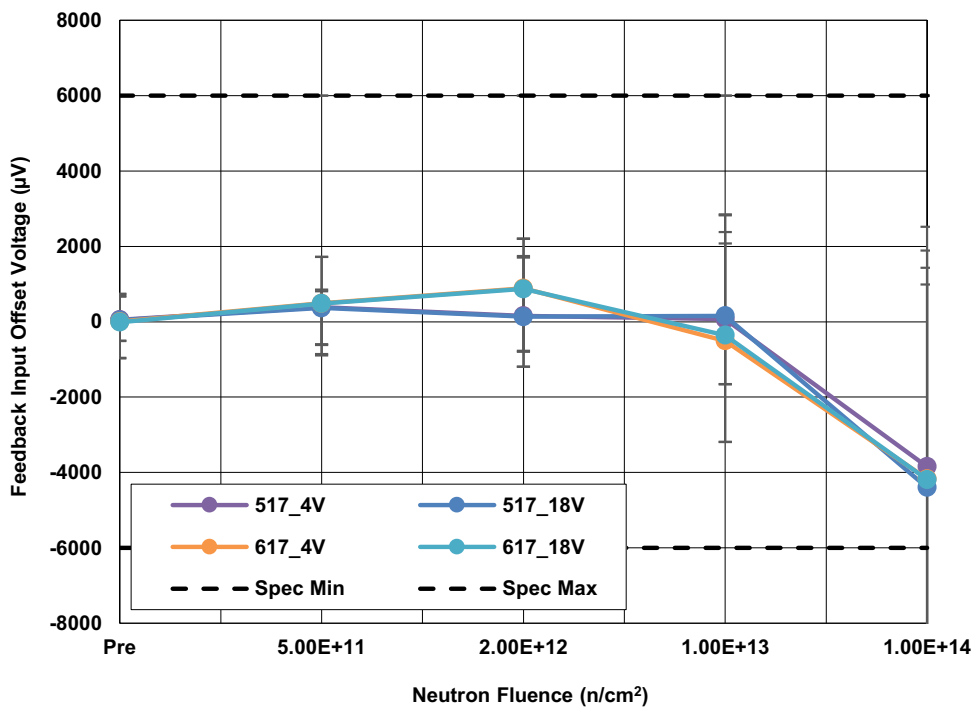


Figure 6. ISL70x17SEH feedback input offset voltage (V_{OSFB}) at $\pm 4V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -6000µV minimum and 6000µV maximum.

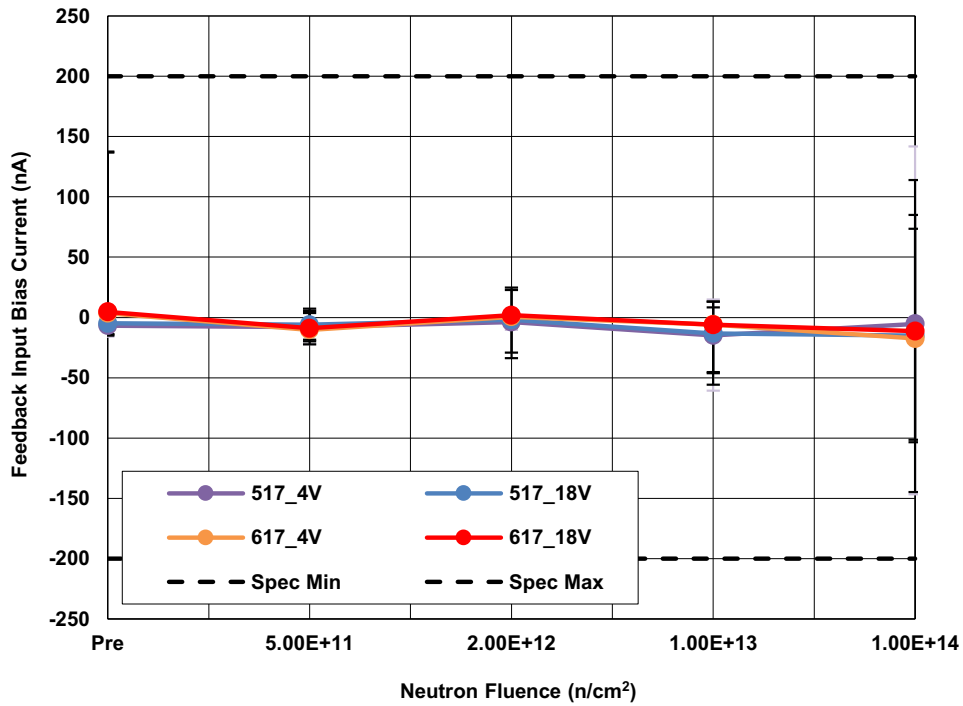


Figure 7. ISL70x17SEH feedback input bias current ($I_{B_{FB}}$) at $\pm 4V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -200nA minimum and 200nA maximum.

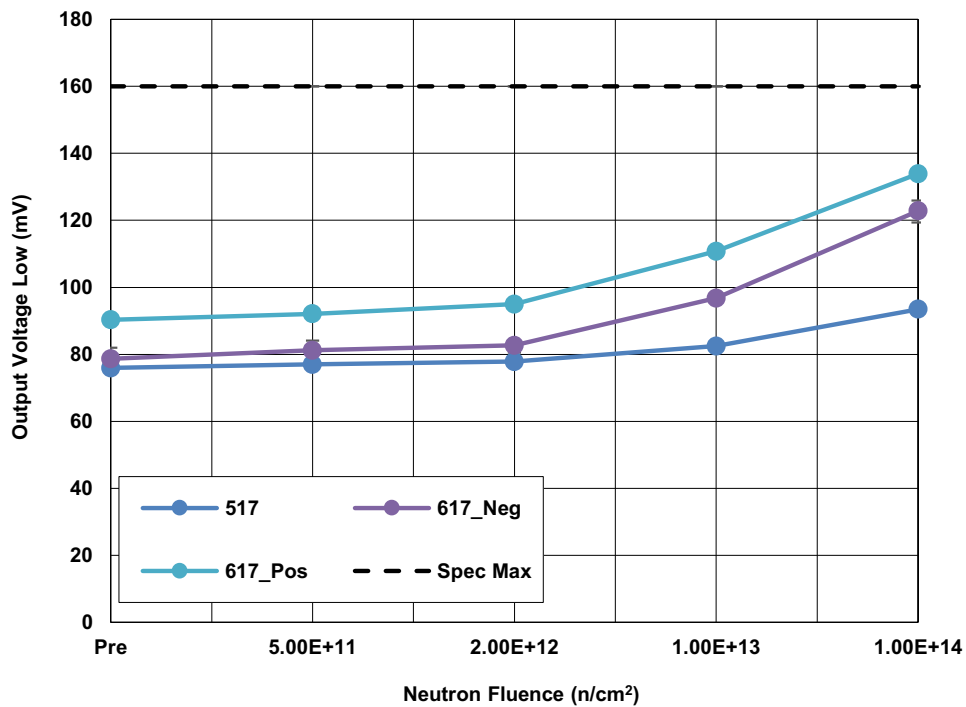


Figure 8. ISL70x17SEH low output voltage (V_{OL}) at $\pm 18V$ with $I_{OUT} = 0mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is 160mV maximum.

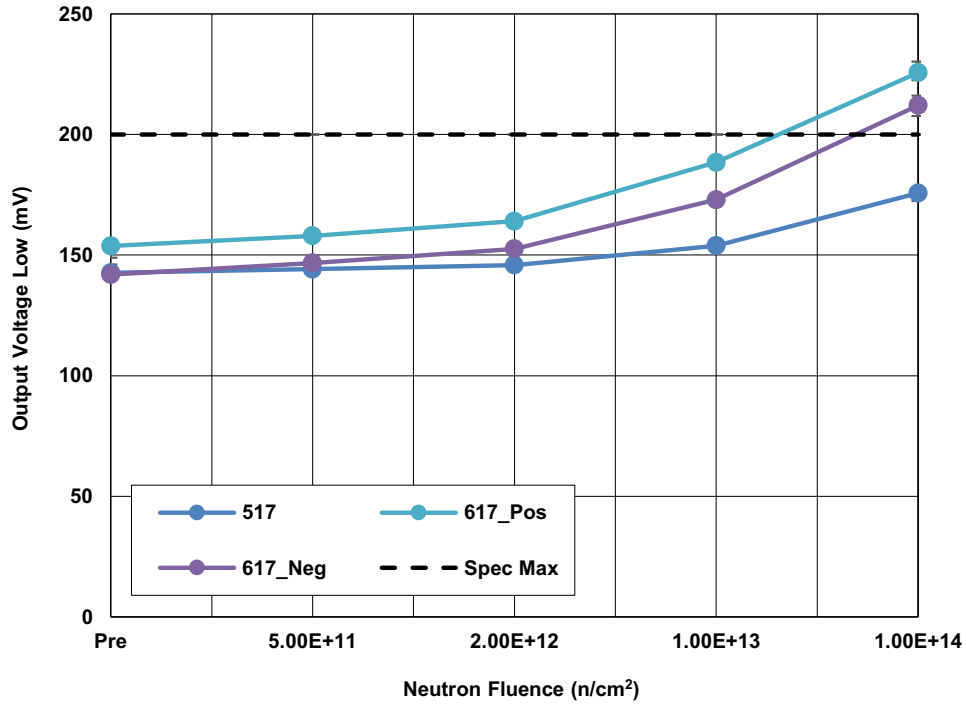


Figure 9. ISL70x17SEH low output voltage (V_{OL}) at $\pm 18V$ with $I_{OUT} = 1.5mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is 200mV maximum.

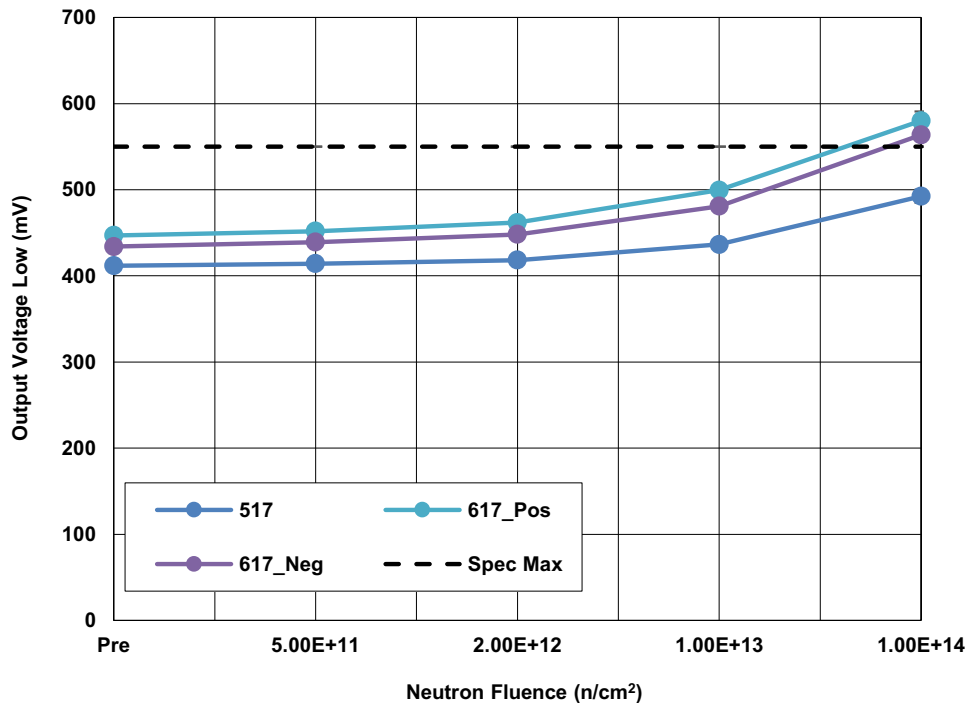


Figure 10. ISL70x17SEH low output voltage (V_{OL}) at $\pm 18V$ with $I_{OUT} = 7.5mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is 550mV maximum.

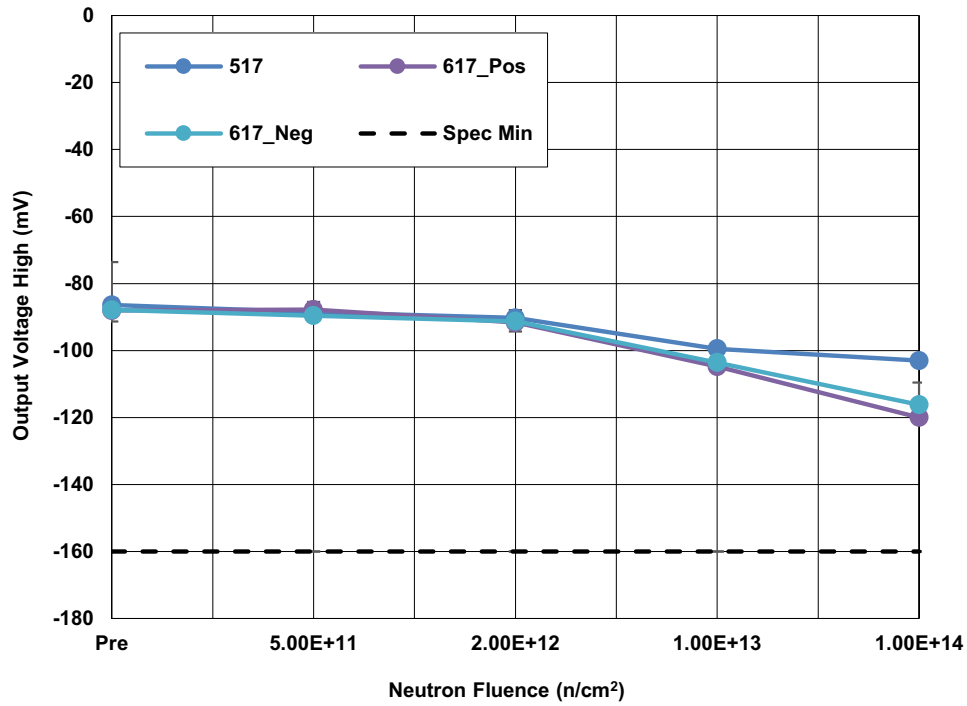


Figure 11. ISL70x17SEH high output voltage (V_{OH}) at $\pm 18V$ with $I_{OUT} = 0mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is $-160mV$ minimum.

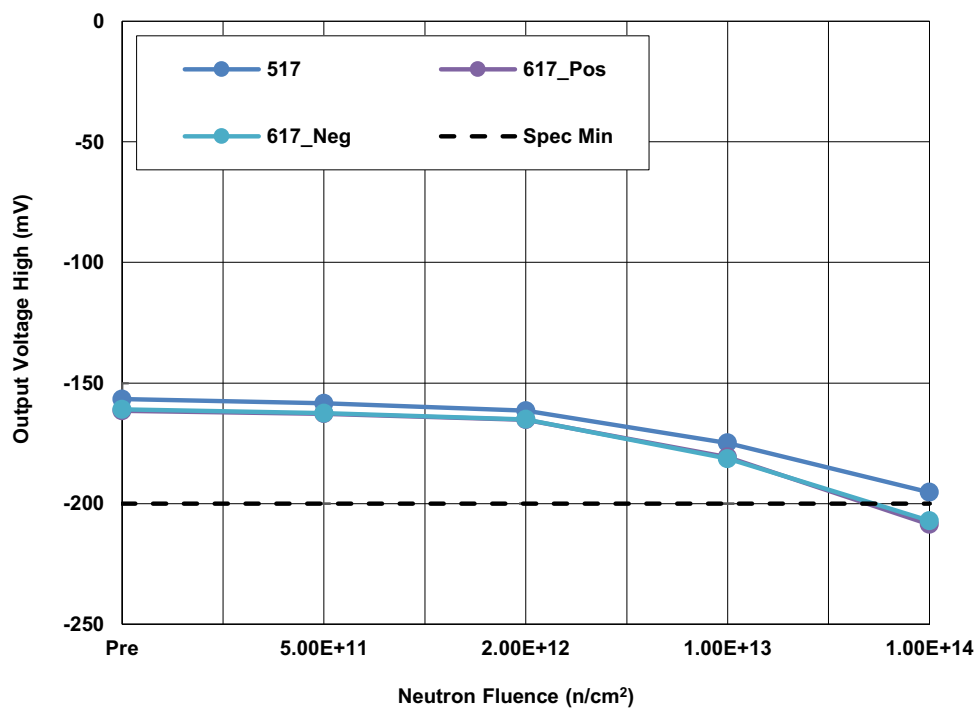


Figure 12. ISL70x17SEH high output voltage (V_{OH}) at $\pm 18V$ with $I_{OUT} = -1.5mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is $-200mV$ maximum.

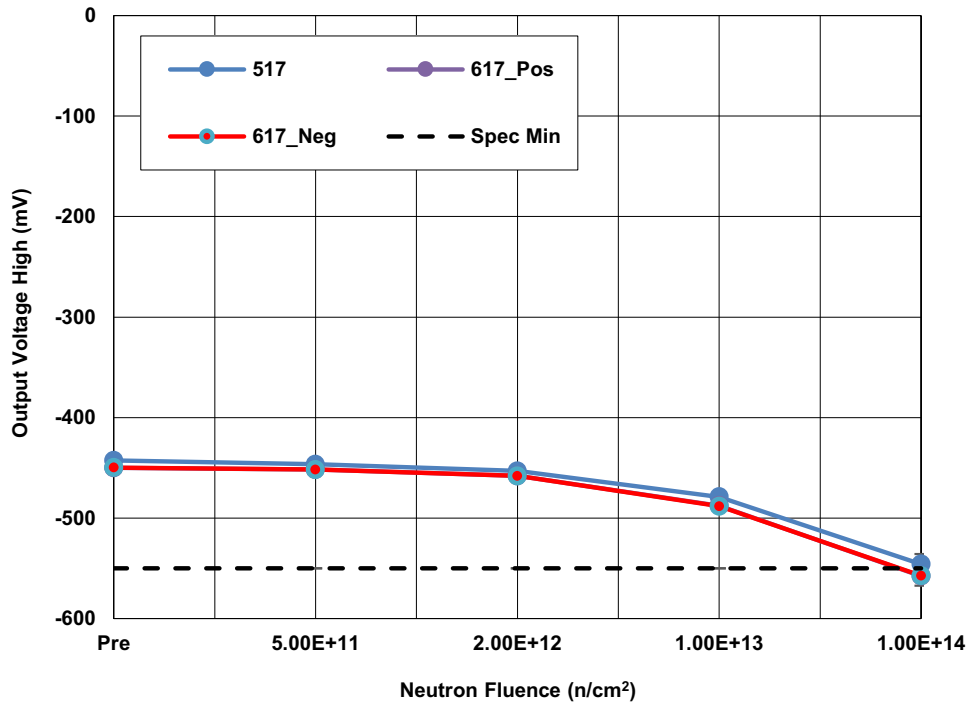


Figure 13. ISL70x17SEH high output voltage (V_{OH}) at $\pm 18V$ with $I_{OUT} = -7.5mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -550mV maximum.

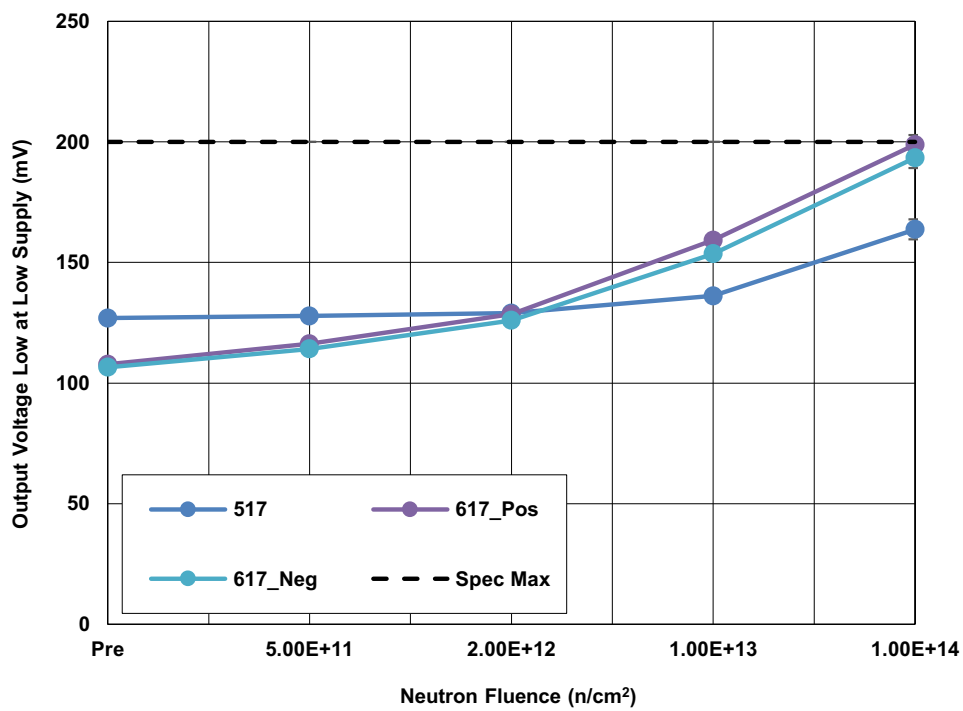


Figure 14. ISL70x17SEH low output voltage (V_{OLLV}) with $V_{CC} = 4V$, $V_{EE} = -4V$, $V_{CO} = 1.5V$, $V_{EO} = -1.5V$, $I_{OUT} = 1.5mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is 200mV maximum.

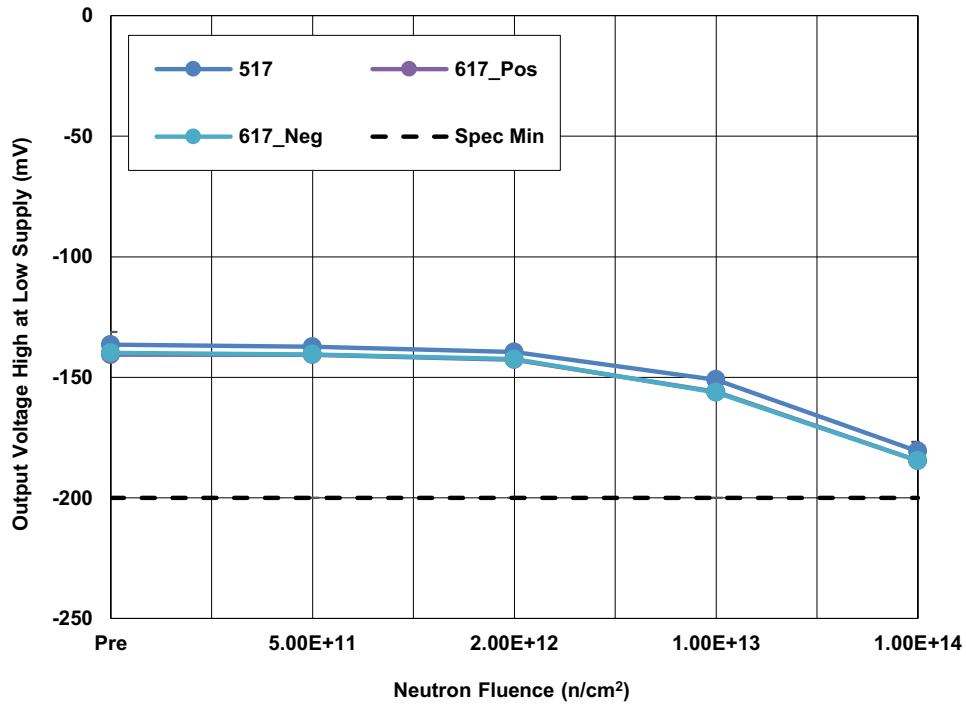


Figure 15. ISL70x17SEH high output voltage ($V_{OH(LV)}$) with $V_{CC} = 4V$, $V_{EE} = -4V$, $V_{CO} = 1.5V$, $V_{EO} = -1.5V$, $I_{OUT} = 1.5mA$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -200mV minimum.

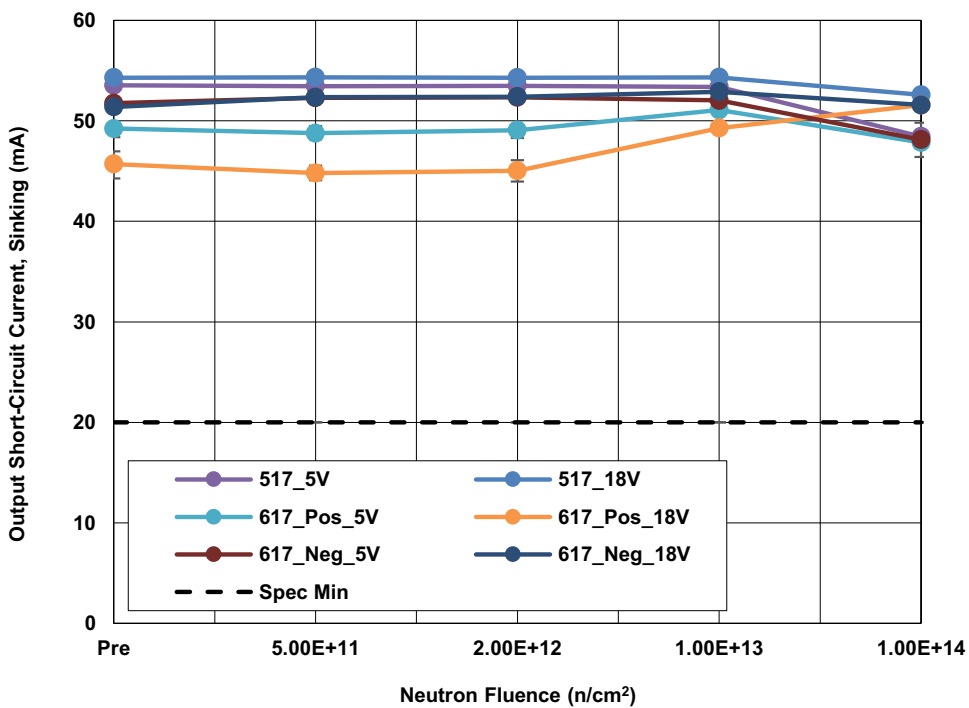


Figure 16. ISL70x17SEH output short-circuit current, sinking (I_{SC}) at $\pm 5V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is 20mA minimum.

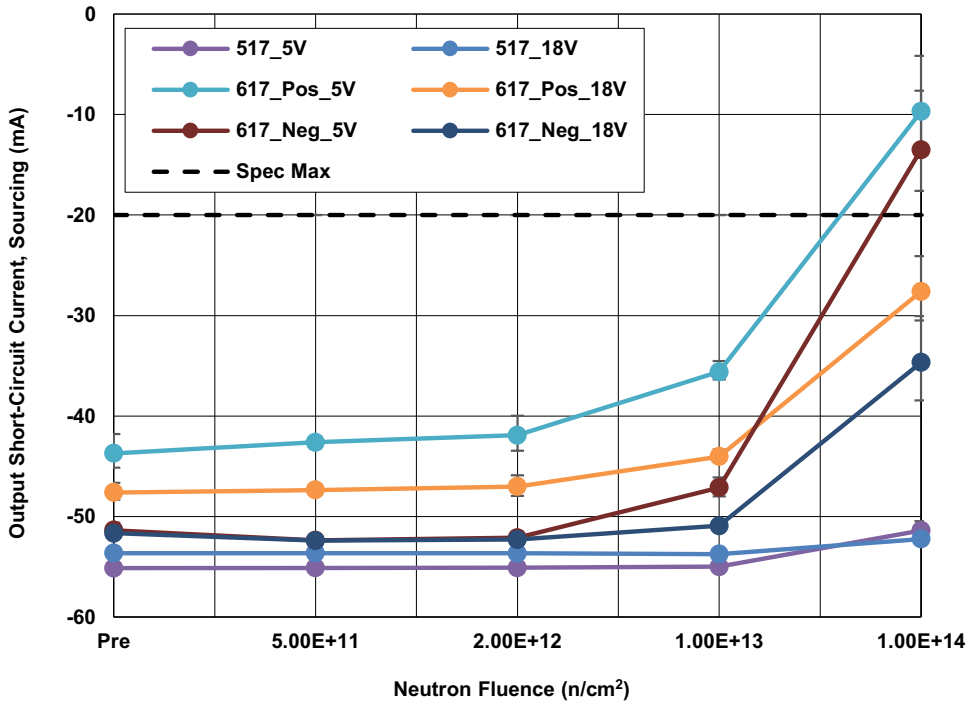


Figure 17. ISL70x17SEH output short-circuit current, sourcing (I_{SC}) at $\pm 5V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -20mA maximum.

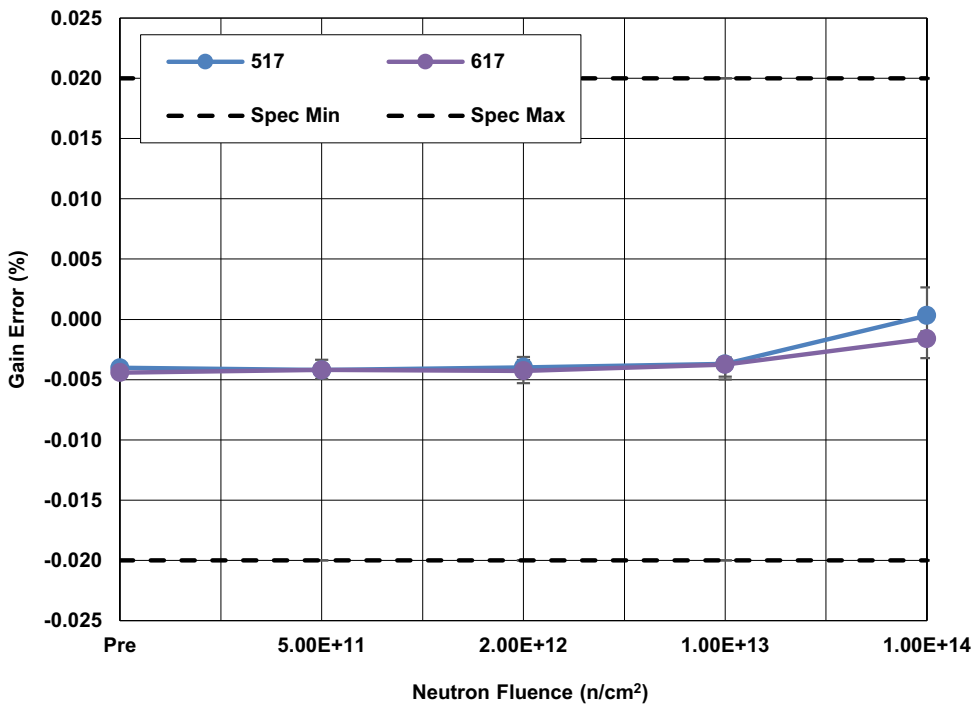


Figure 18. ISL70x17SEH gain error (E_G) with $V_{OUT} = \pm 10V$, $R_{FB} = 120k$, $Gain = 1$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are -0.02% minimum and 0.02% maximum.

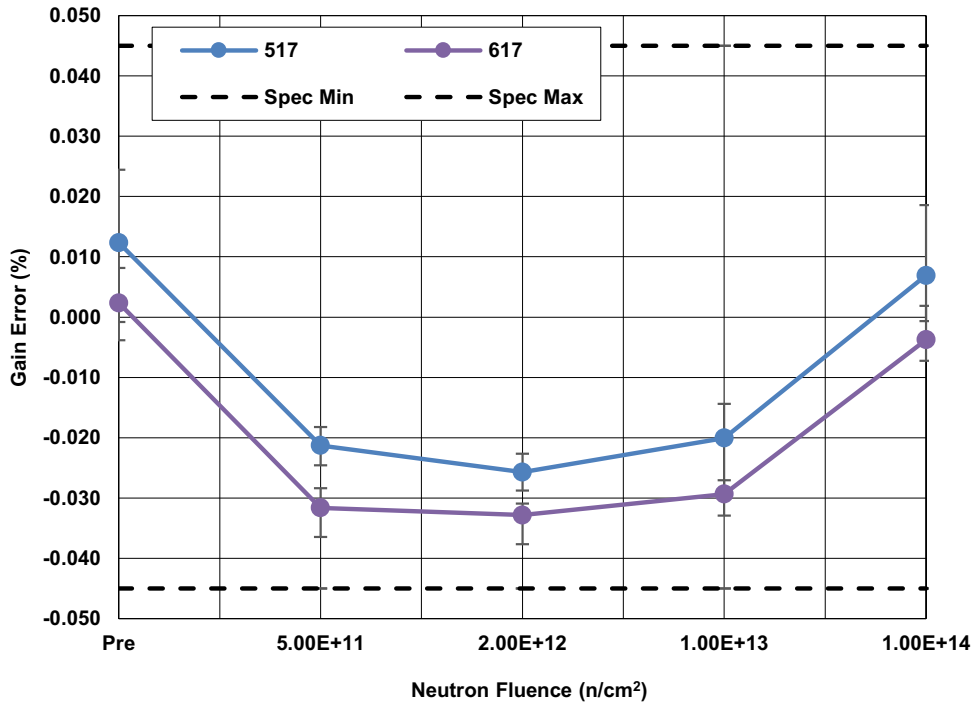


Figure 19. ISL70x17SEH gain error (E_G) with $V_{OUT} = \pm 10V$, $RFB = 120k$, $Gain = 100$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are -0.045% minimum and 0.045% maximum.

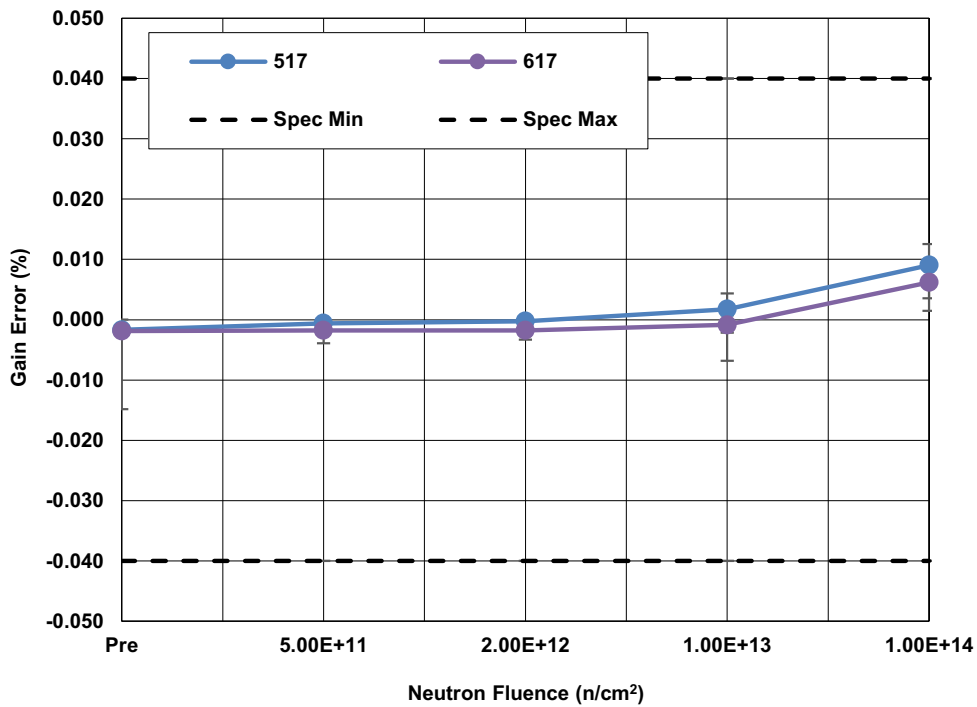


Figure 20. ISL70x17SEH gain error (E_G) with $V_{OUT} = \pm 2.5V$, $RFB = 30k$, $Gain = 1$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are -0.04% minimum and 0.04% maximum.

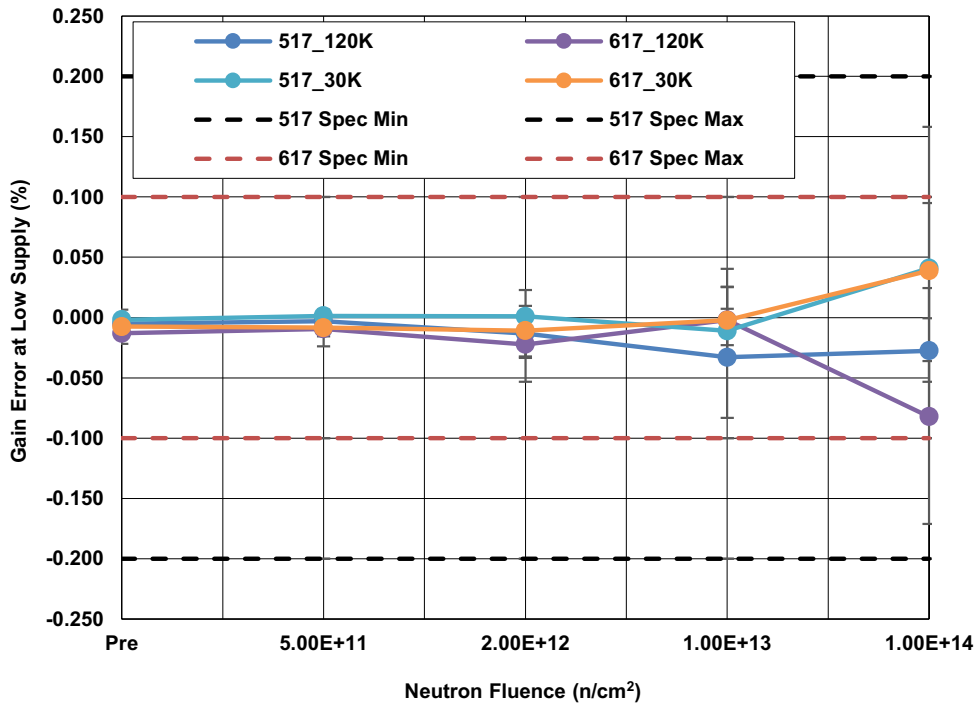


Figure 21. ISL70x17SEH gain error at low supply voltage (E_{GLV}), $V_{OUT} = \pm 0.1V$, $R_{FB} = 120k$, and $30k$, $G = 1$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are -0.2% minimum and 0.2% maximum for the ISL70517SEH and -0.1% minimum and 0.1% maximum for the ISL70617SEH.

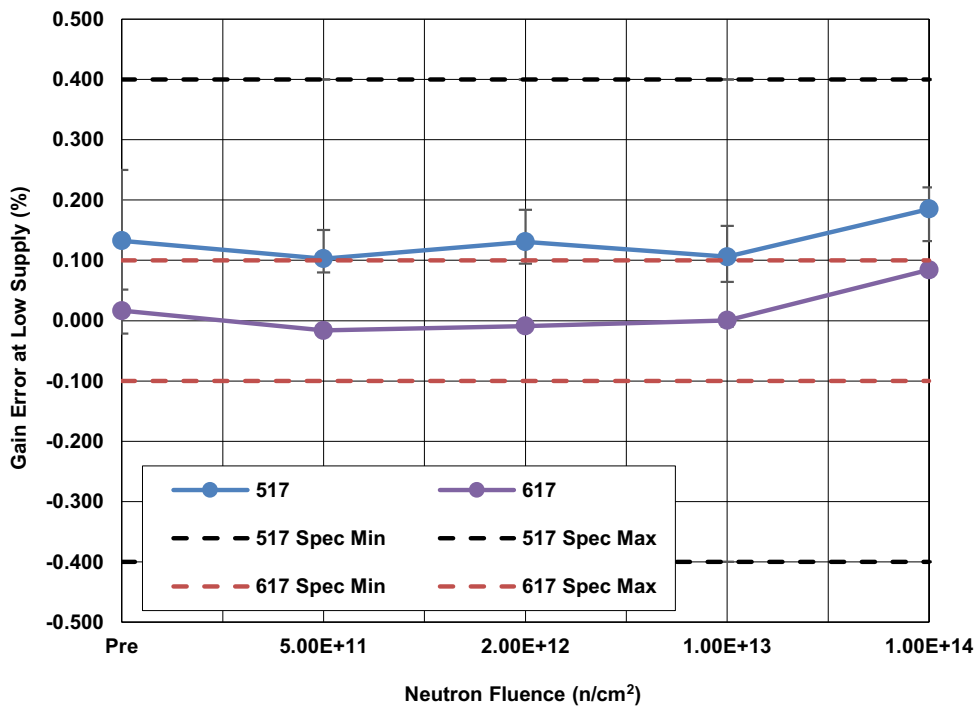


Figure 22. ISL70x17SEH gain error at low supply voltage (E_{GLV}) with $V_{OUT} = \pm 1.25V$, $R_{FB} = 120k$, $Gain = 100$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are -0.4% minimum and 0.4% maximum for the ISL70517SEH and -0.1% minimum and 0.1% maximum for the ISL70617SEH.

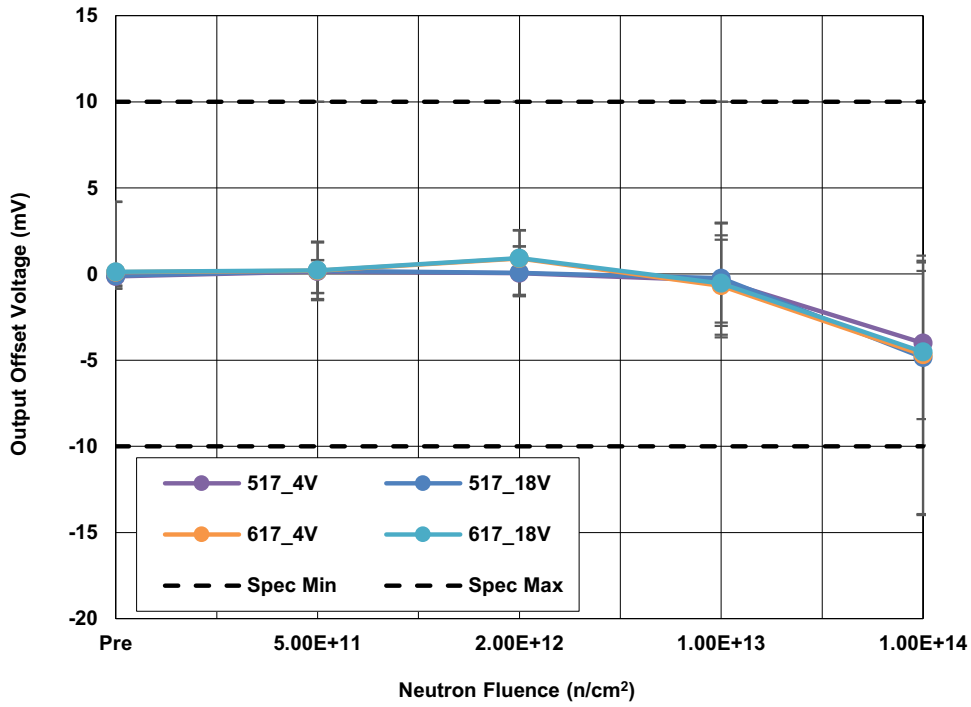


Figure 23. ISL70x17SEH output offset voltage (V_{OSOUT}), at $\pm 5V$ and $\pm 18V$, with $R_{FB} = 30k$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are $-10mV$ minimum and $10mV$ maximum.

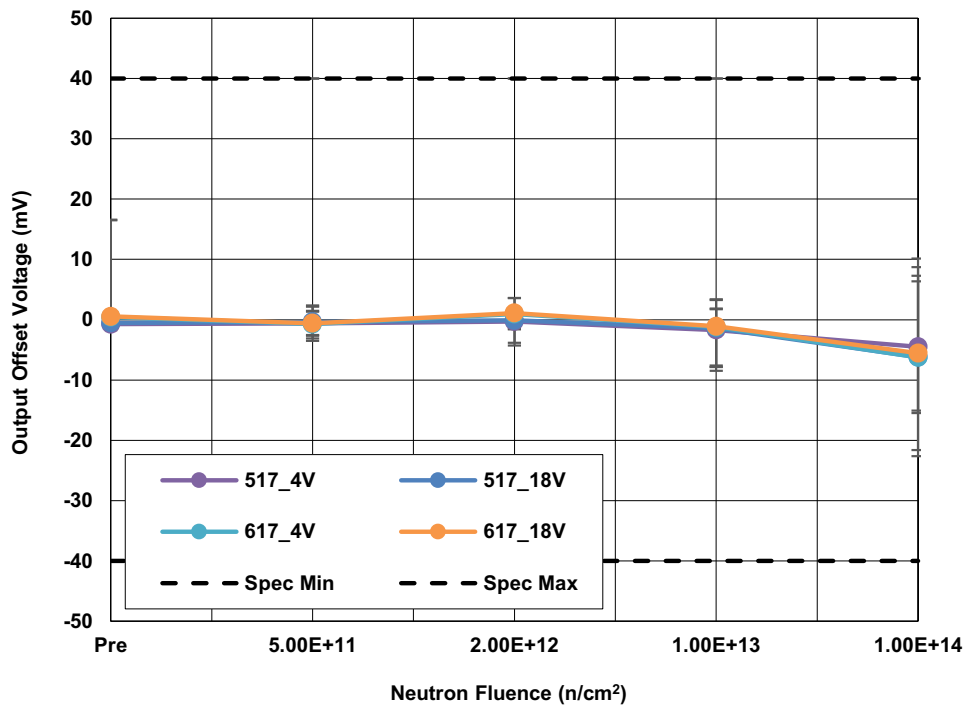


Figure 24. ISL70x17SEH output offset voltage (V_{OSOUT}), at $\pm 5V$ and $\pm 18V$, with $R_{FB} = 120k$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limits are $-40mV$ minimum and $40mV$ maximum.

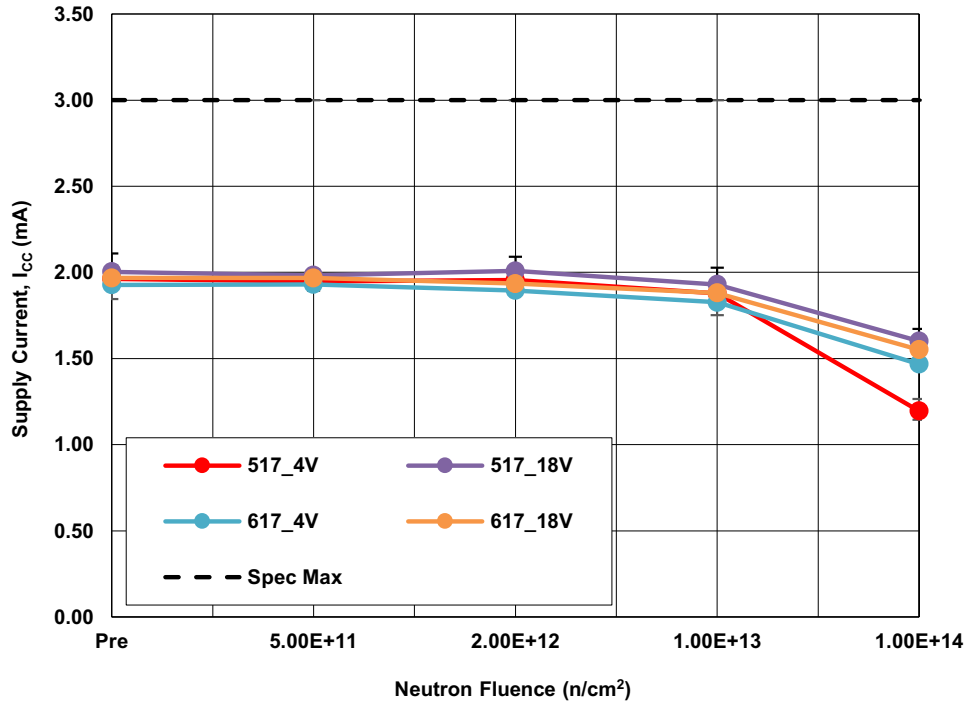


Figure 25. ISL70x17SEH supply current (I_{CC}) at $\pm 4V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is 3mA maximum.

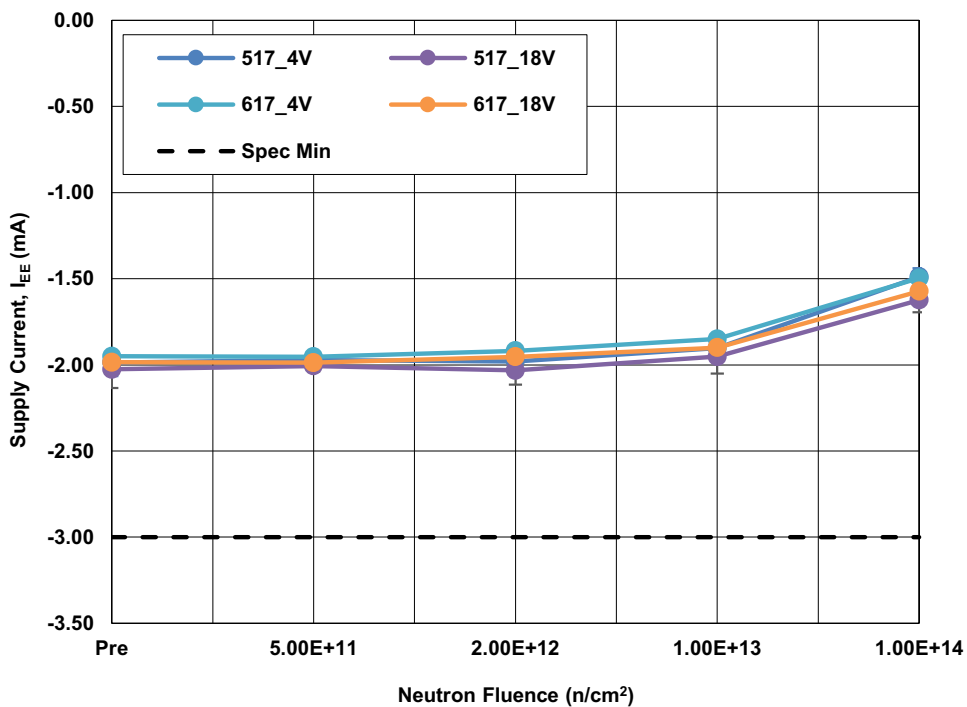


Figure 26. ISL70x17SEH supply current (I_{EE}) at $\pm 4V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -3mA minimum.

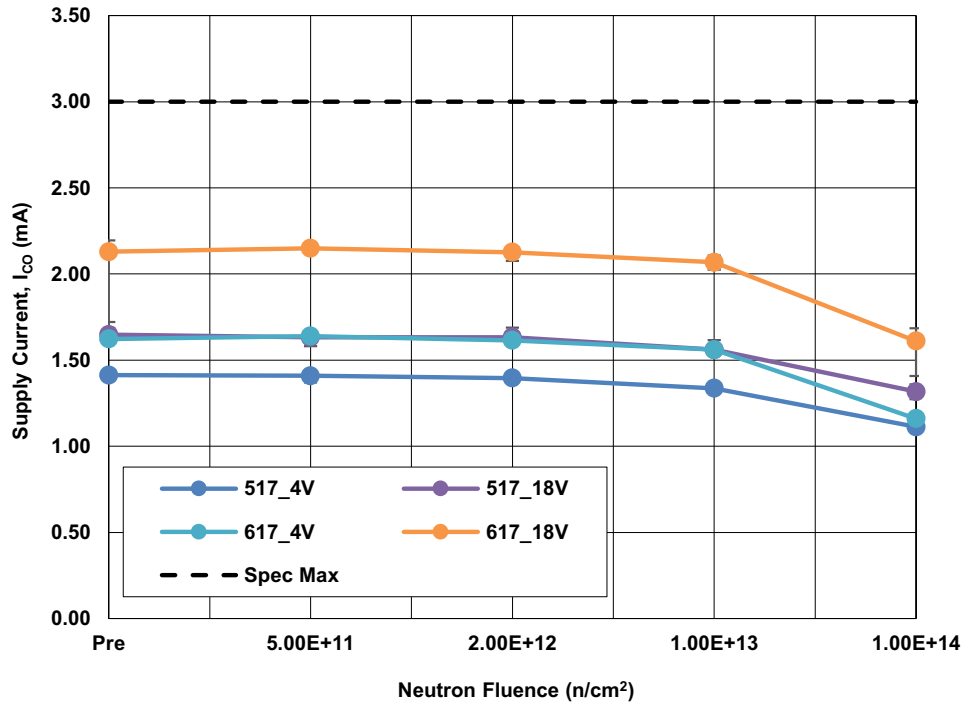


Figure 27. ISL70x17SEH supply current (I_{CO}) at $\pm 4V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is 3mA maximum.

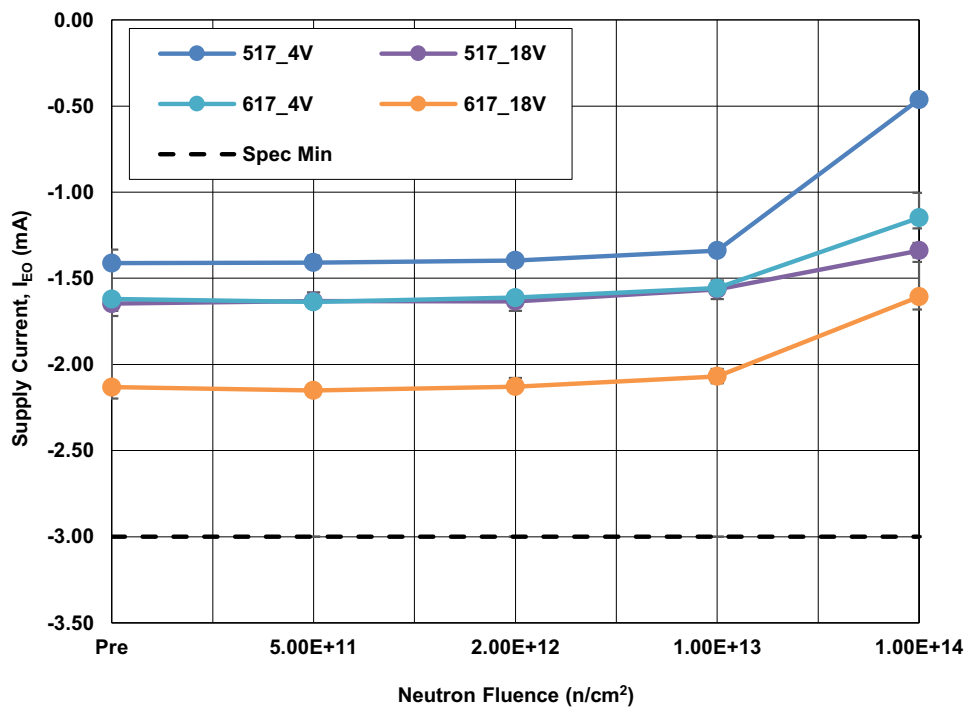


Figure 28. ISL70x17SEH supply current (I_{EO}) at $\pm 4V$ and $\pm 18V$ following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -3mA minimum.

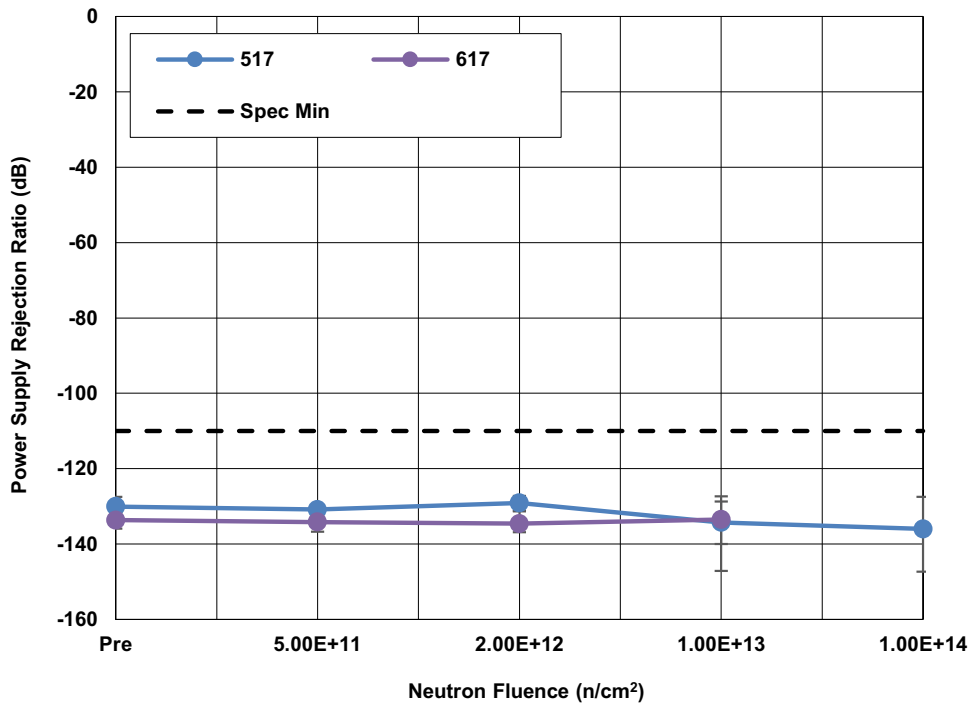


Figure 29. ISL70x17SEH input stage power supply rejection ratio (PSRRI) following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -110dB minimum.

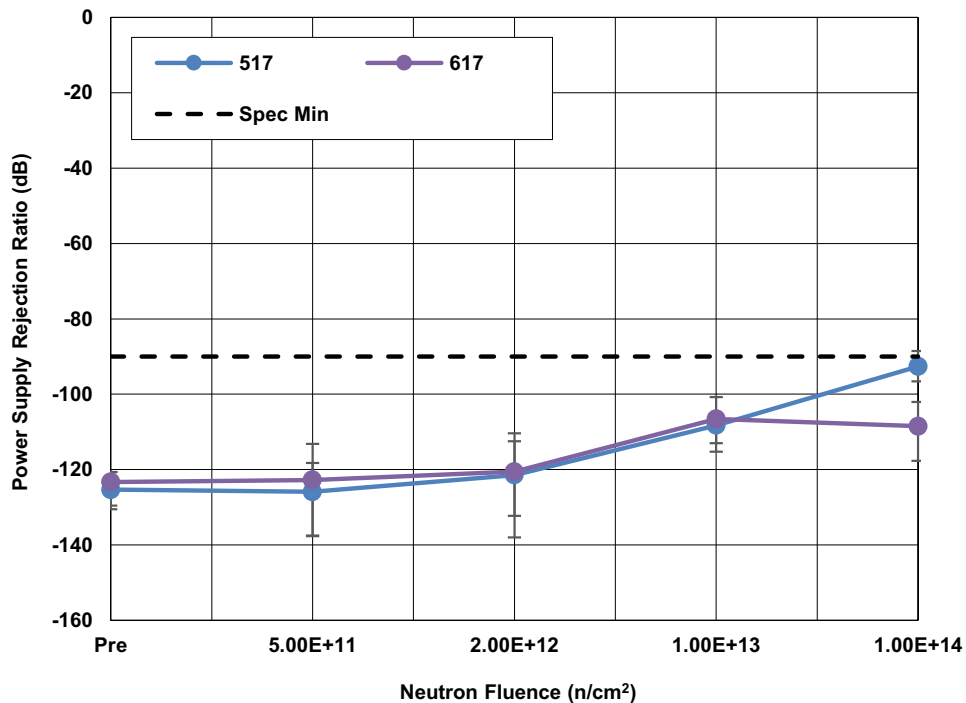


Figure 30. ISL70x17SEH output stage power supply rejection ratio (PSRRO) following irradiation to each level. The error bars represent the minimum and maximum measured values. The SMD limit is -90dB minimum.

3. Discussion and Conclusion

The results of 1MeV equivalent neutron testing of the ISL70517SEH and ISL70617SEH radiation hardened instrumentation amplifiers were reported. Parts were tested at $5 \times 10^{11} \text{n/cm}^2$, $2 \times 10^{12} \text{n/cm}^2$, $1 \times 10^{13} \text{n/cm}^2$, and $1 \times 10^{14} \text{n/cm}^2$. All samples passed the SMD limits after all exposures up to and including $1 \times 10^{13} \text{n/cm}^2$, but failed after $1 \times 10^{14} \text{n/cm}^2$ although they remained functional. The results of key parameters before and after irradiation to each level are plotted in [Figures 1](#) through [30](#). The plots show the mean of each parameter as a function of neutron irradiation, with error bars that represent the minimum and maximum measured values. The figures also show the applicable electrical limits taken from the SMD, but it should be noted that these limits are provided for guidance only as the ISL70517SEH or ISL70617SEH are not specified for the neutron environment.

4. Appendices

4.1 Reported Parameters

Figure	Parameter	Low Limit	High Limit	Unit	Notes
1	Input Offset Voltage	-300	300	μV	$\pm 4\text{V}; \pm 18\text{V}$
2	Input Bias Current	-25	25	nA	$\pm 5\text{V}; \pm 18\text{V}$
3	Input Offset Current	-18.5	18.5	nA	$\pm 5\text{V}; \pm 18\text{V}$
4	Common-Mode Rejection Ratio	-	-120	dB	Gain = 100
5	Common-Mode Rejection Ratio	-	-97	dB	Gain = 1
6	Feedback Input Offset Voltage	-6000	6000	μV	$\pm 4\text{V}; \pm 18\text{V}$
7	Feedback Input Bias Current	-200	200	nA	$\pm 4\text{V}; \pm 18\text{V}$
8	Low Output Voltage	-	160	mV	$\pm 18\text{V}, I_{\text{OUT}} = 0\text{mA}$
9	Low Output Voltage	-	200	mV	$\pm 18\text{V}, I_{\text{OUT}} = 1.5\text{mA}$
10	Low Output Voltage	-	550	mV	$\pm 18\text{V}, I_{\text{OUT}} = 7.5\text{mA}$
11	High Output Voltage	-160	-	mV	$\pm 18\text{V}, I_{\text{OUT}} = 0\text{mA}$
12	High Output Voltage	-200	-	mV	$\pm 18\text{V}, I_{\text{OUT}} = -1.5\text{mA}$
13	High Output Voltage	-550	-	mV	$\pm 18\text{V}, I_{\text{OUT}} = -7.5\text{mA}$
14	Low Output Voltage	-	200	mV	$V_{\text{CC}} = 4\text{V}, V_{\text{EE}} = -4\text{V}, V_{\text{CO}} = 1.5\text{V},$ $V_{\text{EO}} = -1.5\text{V}, I_{\text{OUT}} = 1.5\text{mA}$
15	High Output Voltage	-200	-	mV	
16	Output Short-Circuit Current, Sinking	20	-	mA	$\pm 5\text{V}; \pm 18\text{V}$
17	Output Short-Circuit Current, Sourcing	-	-20	mA	$\pm 5\text{V}; \pm 18\text{V}$
18	Gain Error	-0.02	0.02	%	$V_{\text{OUT}} = \pm 10\text{V}, \text{RFB} = 120\text{k}, \text{G} = 1$
19	Gain Error	-0.045	0.045	%	$V_{\text{OUT}} = \pm 10\text{V}, \text{RFB} = 120\text{k}, \text{G} = 100$
20	Gain Error	-0.04	0.04	%	$V_{\text{OUT}} = \pm 2.5\text{V}, \text{RFB} = 30\text{k}, \text{G} = 1$
21	Gain Error, Low Supply Voltage ('517)	-0.2	0.2	%	$V_{\text{OUT}} = \pm 0.1\text{V}, \text{RFB} = 30\text{k}, 120\text{k}, \text{G} = 1$
	Gain Error, Low Supply Voltage ('617)	-0.1	0.1		
22	Gain Error, Low Supply Voltage ('517)	-0.4	0.4	%	$V_{\text{OUT}} = \pm 1.25\text{V}, \text{RFB} = 120\text{k}, \text{G} = 100$
	Gain Error, Low Supply Voltage ('617)	-0.1	0.1		
23	Output Offset Voltage	-10	10	mV	$\pm 5\text{V}; \pm 18\text{V}, \text{RFB} = 30\text{k}$
24	Output Offset Voltage	-40	40	mV	$\pm 5\text{V}; \pm 18\text{V}, \text{RFB} = 120\text{k}$
25	Supply Current, I_{CC}	-	3.0	mA	$\pm 4\text{V}; \pm 18\text{V}$
26	Supply Current, I_{EE}	-3.0	-	mA	$\pm 4\text{V}; \pm 18\text{V}$
27	Supply Current, I_{CO}	-	3.0	mA	$\pm 4\text{V}; \pm 18\text{V}$
28	Supply Current, I_{EO}	-3.0	-	mA	$\pm 4\text{V}; \pm 18\text{V}$
29	Power Supply Rejection Ratio	-110	-	dB	Input stage PSRR
30	Power Supply Rejection Ratio	-90	-	dB	Output stage PSRR

5. Revision History

Rev.	Date	Description
1.00	Oct.21.19	Initial release

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 - "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.