

# NX8349YK

LASER DIODE

R08DS0118EJ0100

1 310 nm AlGaInAs MQW-DFB LASER DIODE FOR 10 Gb/s APPLICATION

Rev.1.00

Dec 13, 2013

## DESCRIPTION

The NX8349YK is 1 310 nm Multiple Quantum Wells (MQW) structured Distributed Feed-Back (DFB) laser diode TOSA (transmitter optical subassembly) with InGaAs monitor PIN-PD in a receptacle type package designed for SFP+/XFP transceiver.

## FEATURES

- Internal optical isolator
- Optical output power
- Low threshold current
- Wide operating temperature range
- InGaAs monitor PIN-PD

$P_r = -3 \text{ dBm}$

$I_{th} = 8 \text{ mA TYP. @ } T_C = 25^\circ\text{C}$


$T_C = -5 \text{ to } +95^\circ\text{C}$

## APPLICATIONS

- 10 G BASE-LW/LR
- 10 G Fibre Channel



PACKAGE DIMENSIONS (UNIT: mm)

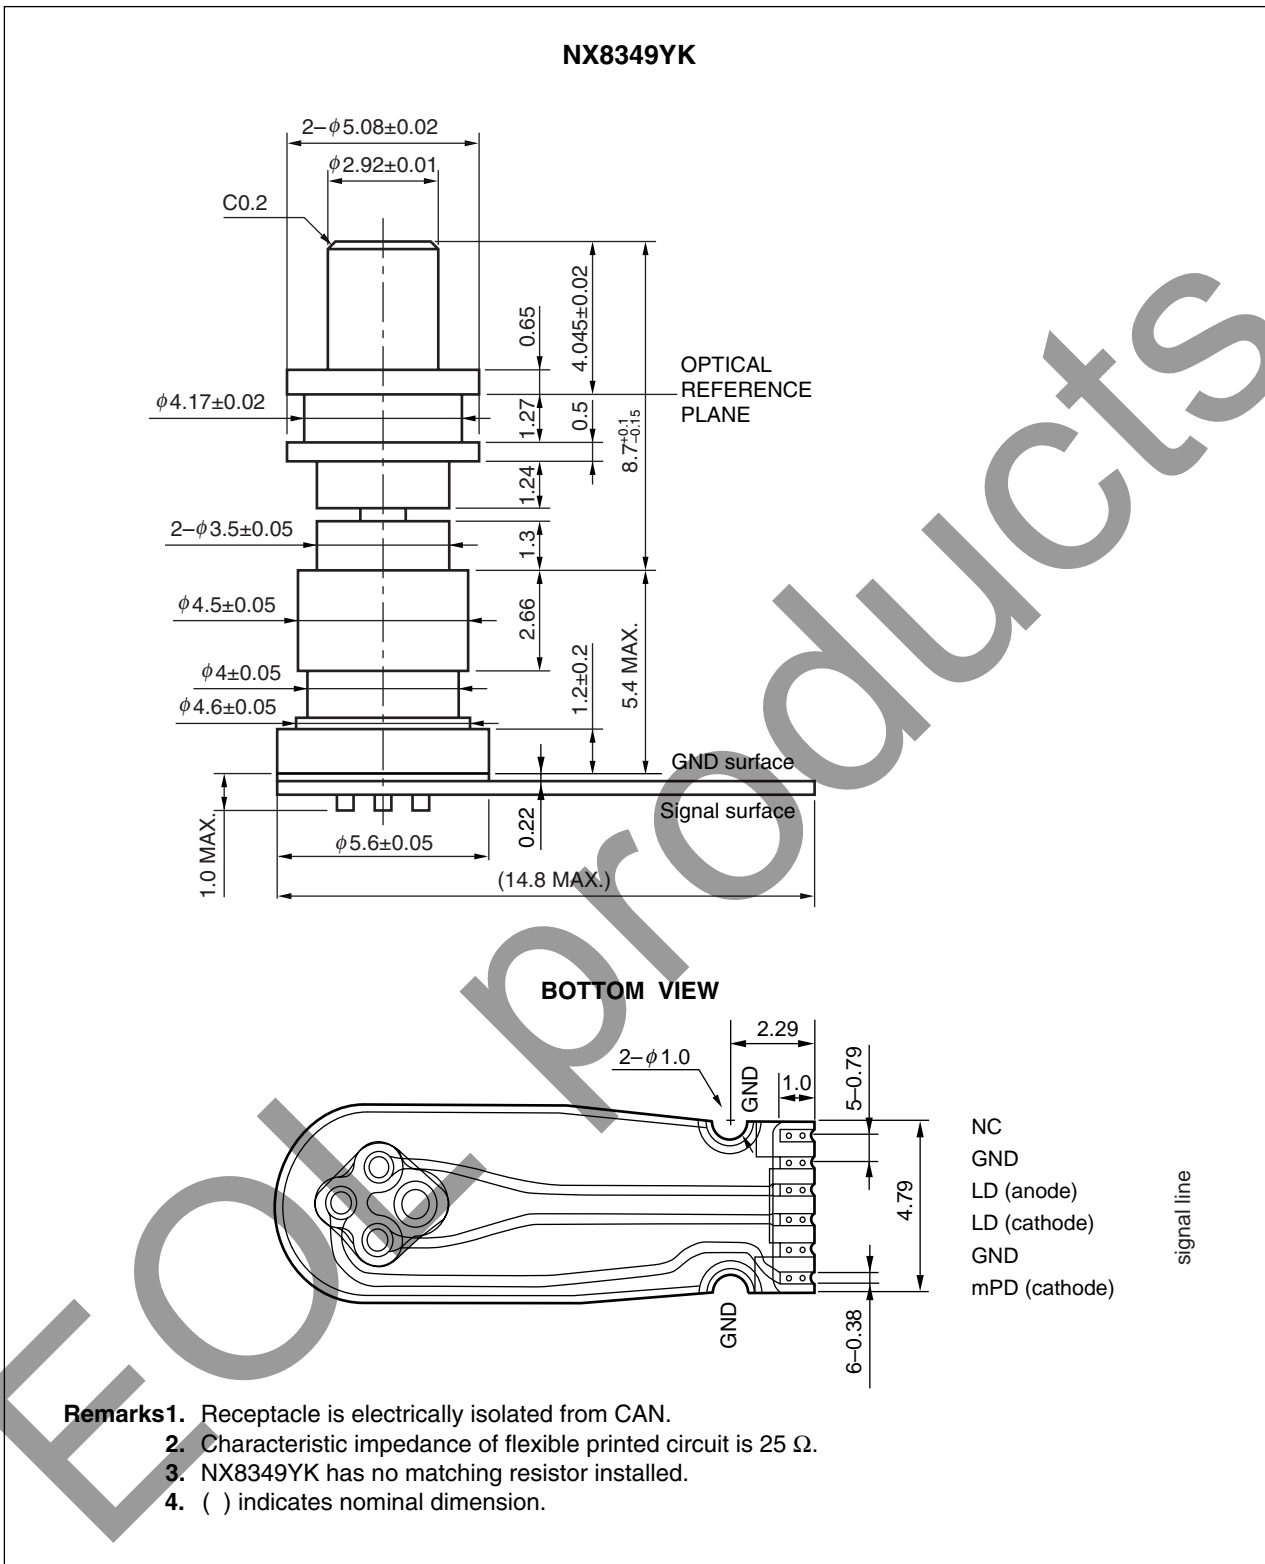

**ORDERING INFORMATION**

<b>Part Number</b>	<b>Receptacle Type</b>	<b>Note</b>
NX8349YK	LC, Electrically isolated, type 2	Differential input with short length flexible PCB, without matching resistor

EOLE products

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Ratings	Unit
Storage Temperature	$T_{stg}$	-40 to +95	°C
Operating Case Temperature	$T_C$	-5 to +95	°C
Forward Current of LD	$I_{FLD}$	120	mA
Reverse Voltage of LD	$V_{RLD}$	2	V
Forward Current of PD	$I_{FPD}$	10	mA
Reverse Voltage of PD	$V_{RPD}$	15	V
Soldering Temperature (Flexible Printed Circuit)	$T_{sld}$	350 (10 sec.)	°C
Optical Output Power	$P_f$	5	mW


EOL products

**ELECTRO-OPTICAL CHARACTERISTICS (T<sub>c</sub> = -5 to +95°C, BOL, unless otherwise specified)**

Parameter	Symbol	Conditions	MIN.	TYP	MAX.	Unit
Mean Optical Output Power	P <sub>f</sub>			-3		dBm
Peak Emission Wavelength	λ <sub>p</sub>	CW, P <sub>f</sub> = -3 dBm	1 290		1 330	nm
Spectral Width	Δλ	CW, P <sub>f</sub> = -3 dBm, 20 dB down			1	nm
Side Mode Suppression Ratio	SMSR	CW, P <sub>f</sub> = -3 dBm	35			dB
Threshold Current	I <sub>th</sub>	CW, T <sub>c</sub> = 25°C		8	15	mA
		CW	2		30	
Differential Efficiency	η <sub>d</sub>	CW, P <sub>f</sub> = -3 dBm, T <sub>c</sub> = 25°C	0.020	0.033	0.040	W/A
		CW, P <sub>f</sub> = -3 dBm	0.012		0.060	
Temperature Dependence of Differential Efficiency	Δη <sub>d</sub>	$\Delta\eta_d = 10 \log \frac{\eta_d}{\eta_d (@ 25^\circ\text{C})}$	-3.5		1.5	dB
Operation Voltage	V <sub>op</sub>	CW, P <sub>f</sub> = -3 dBm	0.5		2.2	V
Monitor Current	I <sub>m</sub>	CW, P <sub>f</sub> = -3 dBm	70		700	μA
Monitor Dark Current	I <sub>D</sub>	V <sub>R</sub> = 3.3 V, T <sub>c</sub> = 25°C			10	nA
		V <sub>R</sub> = 3.3 V			500	
Rise Time	t <sub>r</sub>	20-80% *1			50	ps
Fall Time	t <sub>f</sub>	20-80% *1			50	ps
Monitor PD Terminal Capacitance	C <sub>t</sub>	V <sub>R</sub> = 3.3 V, f = 1 MHz		6	20	pF
Relative Intensity Noise	RIN				-128	dB/Hz
Tracking Error <sup>*2</sup>	γ		-1.0		1.0	dB

Notes: \*1. 9.95/10.3/10.5 Gb/s, PRBS 2<sup>31</sup>-1, NRZ, Duty Cycle = 50%

\*2. Tracking Error: γ

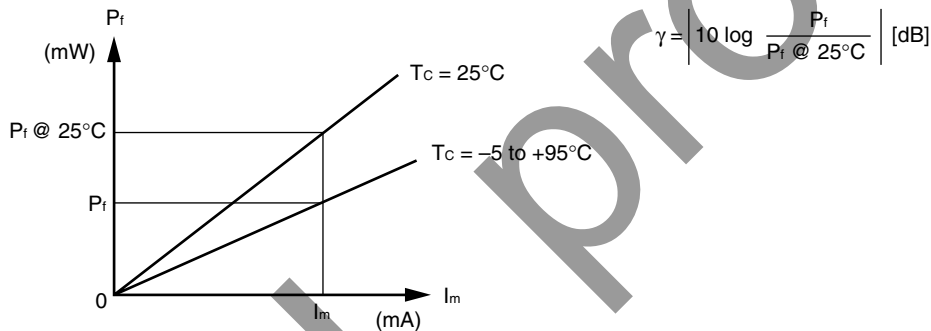


**REFERENCE**

Document Name	Document No.
Opto-Electronics Devices Pamphlet*1	PX10160E

Notes: \*1. Published by the former NEC Electronics Corporation.

EOL products

**SAFETY INFORMATION ON THIS PRODUCT**

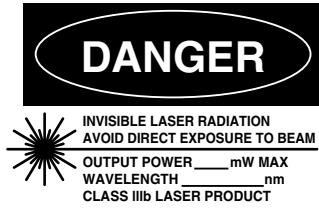


**DANGER**

INVISIBLE LASER RADIATION  
AVOID DIRECT EXPOSURE TO BEAM

OUTPUT POWER \_\_\_\_\_ mW MAX  
WAVELENGTH \_\_\_\_\_ nm  
CLASS IIIb LASER PRODUCT

**SEMICONDUCTOR LASER**



AVOID EXPOSURE-Invisible  
Laser Radiation is emitted from  
this aperture

<p><b>Warning</b> Laser Beam</p>	<p>A laser beam is emitted from this diode during operation. The laser beam, visible or invisible, directly or indirectly, may cause injury to the eye or loss of eyesight.</p> <ul style="list-style-type: none"> <li>• Do not look directly into the laser beam.</li> <li>• Avoid exposure to the laser beam, any reflected or collimated beam.</li> </ul>
<p><b>Caution</b> GaAs Products</p>	<p>This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.</p> <ul style="list-style-type: none"> <li>• Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.                     <ol style="list-style-type: none"> <li>1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.</li> <li>2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.</li> </ol> </li> <li>• Do not burn, destroy, cut, crush, or chemically dissolve the product.</li> <li>• Do not lick the product or in any way allow it to enter the mouth.</li> </ul>
<p><b>Caution</b> Optical Fiber</p>	<p>A glass-fiber is attached on the product. Handle with care.</p> <ul style="list-style-type: none"> <li>• When the fiber is broken or damaged, handle carefully to avoid injury from the damaged part or fragments.</li> </ul>

EOL products

<b>Revision History</b>	<b>NX8349YK Data Sheet</b>
-------------------------	----------------------------

Rev.	Date	Description	
		Page	Summary
1.00	Dec 13, 2013	-	First edition issued

EOL products

All trademarks and registered trademarks are the property of their respective owners.



## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
  2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
  3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
  4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
  5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.  
\*Standard\*: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.  
\*High Quality\*: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.  
Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
  6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
  7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
  8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
  9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
  10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
  11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
  12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.  
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



### SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

**California Eastern Laboratories, Inc.**  
4590 Patrick Henry Drive, Santa Clara, California 95054, U.S.A.  
Tel: +1-408-919-2500, Fax: +1-408-988-0279

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K  
Tel: +44-1628-651-700, Fax: +44-1628-651-804

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 D Usseldorf, Germany  
Tel: +49-211-65030, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 301, Tower A, Central Towers, 555 LanGao Rd., Putuo District, Shanghai, China  
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2886-9318, Fax: +852-2886-9022/9044

**Renesas Electronics Taiwan Co., Ltd.**  
13F, No. 363, Fu Shing North Road, Taipei, Taiwan  
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949  
Tel: +65-6213-0200, Fax: +65-6213-0300

**Renesas Electronics Malaysia Sdn.Bhd.**  
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics Korea Co., Ltd.**  
12F., 234 Teheran-ro, Gangnam-Gu, Seoul, 135-080, Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5141