

Interface IP

10Gbps SerDes for TSMC 28nm HPC+

Overview


The Renesas SerDes PHY is useful analog transceiver hard macro for various high speed serial interface PHY layer of TSMC 28nm HPC+ process. This macro can be used as 1.25~ 10Gbps various high speed interface standards PHY.

Key Features


- Renesas SerDes PHY can be used for analog transceiver of following interface.
 - PCI Express 3.0 / USB3.1 gen2 superspeed / Serial ATA 3.1/ 10GKR / SGMII *1
- Multi-link support for area reduction in using multiple SerDes
- Technology is TSMC 28nm HPC+ 1p10M
- Supply voltage can be applied 0.90V for nominal and 1.0V for overdrive of core voltage, 1.8V for IO voltage.
- 3Tap FIR filter for Tx equalizer / Adaptive 5Tap DFE for Rx equalizer.
- Built-in differential input buffer for clean reference clock

*1 There are some restrictions for use case of these standards. Please contact and consult to Renesas Electronics for detail information before purchasing product.

Block Diagram

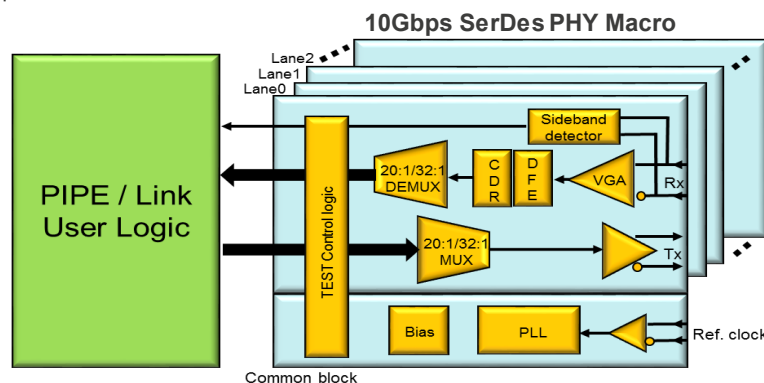

Multi-link

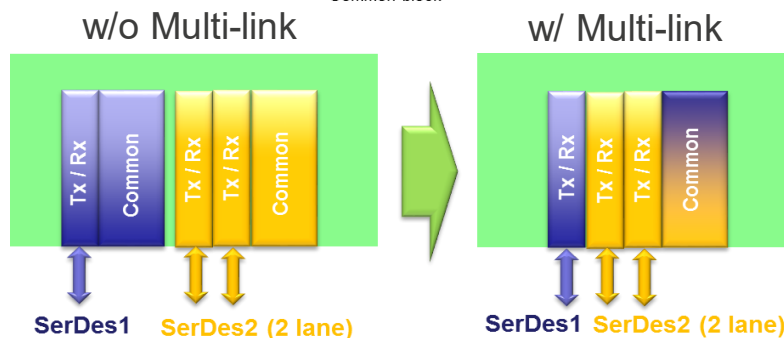

**This IP is contract design IP. Please contact for detail.*

CTPD-24-111
R06PF0092EJ0100