


Interface IP

CAN Controller

IMPORTANT: When selling the device, please contact Bosch(Robert Bosch GmbH) regarding CAN2.0 Protocol license.

Overview

This IP is a single channel of the CAN (Controller Area Network) controller that complies with the ISO 11898-1 Standards. The CAN controller transmits and receives both formats of messages, namely the standard identifier (11 bits) (identifier is hereafter referred to as ID) and extended ID (29 bits).

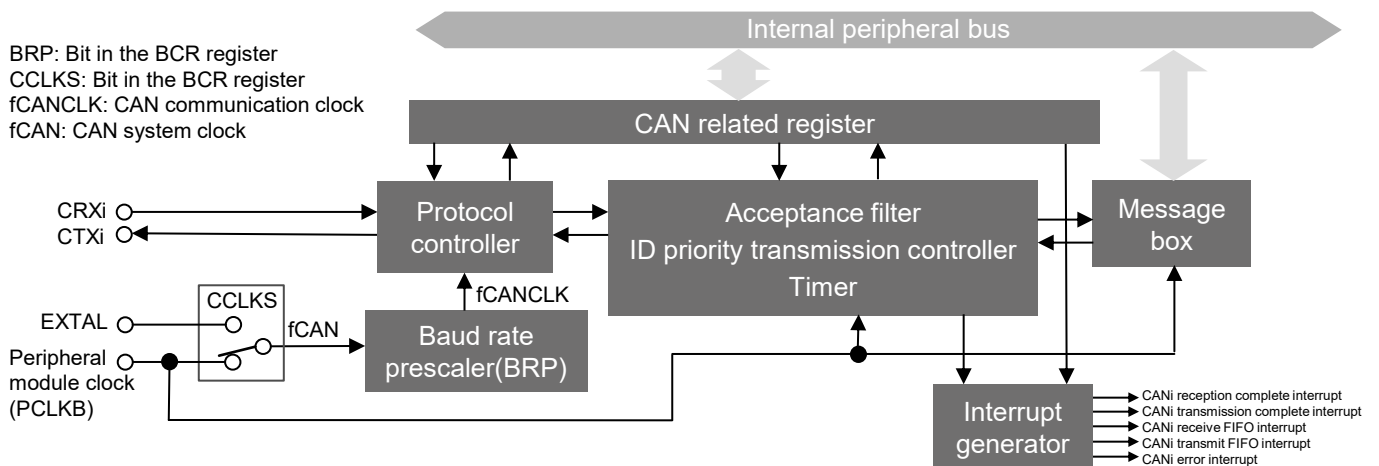

Key Features

- Protocol : ISO 11898-1 compliant (standard and extended frames)
- Reception
 - Data frame and remote frame can be received.
 - Selectable receiving ID format. (only standard ID, only extended ID, or both IDs)
 - Programmable one-shot reception function.
 - Selectable from overwrite mode (message overwritten) and overrun mode (message discarded).
 - The reception complete interrupt can be individually enabled or disabled for each mailbox.
- Transmission
 - Data frame and remote frame can be transmitted.
 - Selectable transmitting ID format. (only standard ID, only extended ID, or both IDs)
 - Programmable one-shot transmission function.
 - Selectable from ID priority mode and mailbox number priority mode.
 - Transmission request can be aborted. (the completion of abort can be confirmed with a flag)
 - The transmission complete interrupt can be individually enabled or disabled for each mailbox.

PMO-25-009
 R06PF0003EJ0101