

Introduction

This report summarizes results of 1MeV equivalent neutron testing of the [ISL705AEH](#) microprocessor supervisory circuit. The test was conducted in order to determine the sensitivity of the part to Displacement Damage (DD) caused by neutron or proton environments. Neutron fluences ranged from $2 \times 10^{12} \text{ n/cm}^2$ to $1 \times 10^{14} \text{ n/cm}^2$. The six parts of the ISL705xEH and ISL706xEH family are closely similar and the results for the ISL705AEH are applicable to all six parts. This project was carried out in collaboration with Boeing (El Segundo, CA), whose support is gratefully acknowledged.

Reference Documents

- MIL-STD-883 test method 1017
- [ISL705AEH](#) datasheet
- DSCC Standard Microcircuit Drawing (SMD) [5962-11213](#)

Part Description

The ISL705xEH and ISL706xEH family of devices consists of the ISL705AEH, ISL705BEH, ISL705CEH, ISL706AEH, ISL706BEH and ISL706CEH and are radiation hardened 5.0V/3.3V microprocessor supervisory circuits that reduce the complexity required to monitor supply voltages in microprocessor systems. These devices significantly improve accuracy and reliability relative to discrete solutions. Each IC provides four key functions:

1. A reset output during power-up, power-down, and brownout conditions.
2. An independent watchdog output that goes low if the watchdog input has not been toggled within 1.6s.
3. A precision threshold detector for monitoring a power supply other than V_{DD} .
4. An active-low manual-reset input.

Specifications for radiation hardened QML devices are controlled by the Defense Logistics Agency Land and Maritime (DLA). Detailed electrical specifications are contained in SMD [5962-11213](#).

The ISL705xRH and ISL706xRH families of devices are acceptance tested to a total dose (TID) level of 300krad(Si) at high dose rate (50-300rad(Si)/s) only. The ISL705xEH and ISL706xEH families of devices are acceptance tested to a total dose (TID) level of 300krad(Si) at high dose rate (50-300rad(Si)/s) and to 50krad(Si) at low dose rate ($<0.01 \text{ rad(Si)/s}$). The parts are identical except for these acceptance testing flows.

TABLE 1. ISL705AEH PIN ASSIGNMENTS

TERMINAL NUMBER	TERMINAL SYMBOL	TERMINAL NUMBER	TERMINAL SYMBOL
1	MR_BAR	5	PFO_BAR

TABLE 1. ISL705AEH PIN ASSIGNMENTS

TERMINAL NUMBER	TERMINAL SYMBOL	TERMINAL NUMBER	TERMINAL SYMBOL
2	VDD	6	WDI
3	GND	7	RST_BAR
4	PFI	8	WDO_BAR

Test Description

Irradiation Facilities

1MeV equivalent neutron irradiation was performed at the White Sands Missile Range Fast Burst Reactor (FBR). Dosimetry data can be furnished upon request. Parts were tested in an unbiased configuration with all leads shorted together in general accordance with TM 1017 of MIL-STD-883. As neutron irradiation activates many of the heavier elements found in a packaged integrated circuit, the parts exposed at the higher neutron levels required considerable 'cooldown' time before being shipped back to Intersil for electrical testing.

Test Fixturing

No formal irradiation test fixturing was involved. These DD tests are informally termed 'bag tests' indicating that the parts are irradiated in an inactive state with all leads shorted together.

Characterization Equipment and Procedures

Electrical testing was performed before and after irradiation using the Intersil Palm Bay, FL Automated Test Equipment (ATE). All electrical testing was performed at room temperature.

Experimental Matrix

The experimental matrix consisted of 5 samples irradiated at $2 \times 10^{11} \text{ n/cm}^2$, 5 irradiated at $1 \times 10^{13} \text{ n/cm}^2$, 5 irradiated at $3 \times 10^{13} \text{ n/cm}^2$ and 5 irradiated at $1 \times 10^{14} \text{ n/cm}^2$. Five control units were used. ISL705AEHF samples were drawn from fabrication lot WPD4HFEH and were packaged in the standard eight-lead ceramic production package code K8.A. Samples were screened to the SMD limits over temperature before the start of neutron testing.

Results

Neutron testing of the ISL705AEH is complete and the results are reported in the balance of this report. It should be carefully realized when interpreting the data that each neutron irradiation was performed on a different five-unit sample; this is *not* total dose testing, where the damage is cumulative over a number of downpoints.

Attributes Data

TABLE 2. ISL705AEH ATTRIBUTES DATA

PART	SERIAL	SAMPLE SIZE	FLUENCE, (n/cm ²)	PASS (Note 1)	FAIL	NOTES
ISL705AEH	1-5	5	2x10 ¹²	5	0	All passed
ISL705AEH	6-10	5	1x10 ¹³	5	0	All passed
ISL705AEH	11-15	5	3x10 ¹³	5	0	All passed
ISL705AEH	16-20	5	1x10 ¹⁴	4	1	S/N 921 failed, nonfunctional

NOTE:

- 'Pass' indicates a sample that passes all SMD limits.

Variables data

The plots in [Figures 1](#) through [13](#) show data plots for key parameters before and after irradiation to each level. The reported parameters and their data sheet limits are shown in ["Appendices" on page 9](#). The plots show the population median, minimum and maximum of each parameter as a function of neutron irradiation. We chose to plot the median because of the small sample sizes (five per cell) involved. We also show the applicable post-total dose electrical limits as taken from the SMD; it should be carefully noted that these limits are provided for *guidance only* as the ISL705AEH is not specified or guaranteed for the neutron environment. Intersil does not design, qualify or guarantee its parts for the DD environment, but has performed limited collaborative neutron testing for customer guidance.

Variables Data Plots

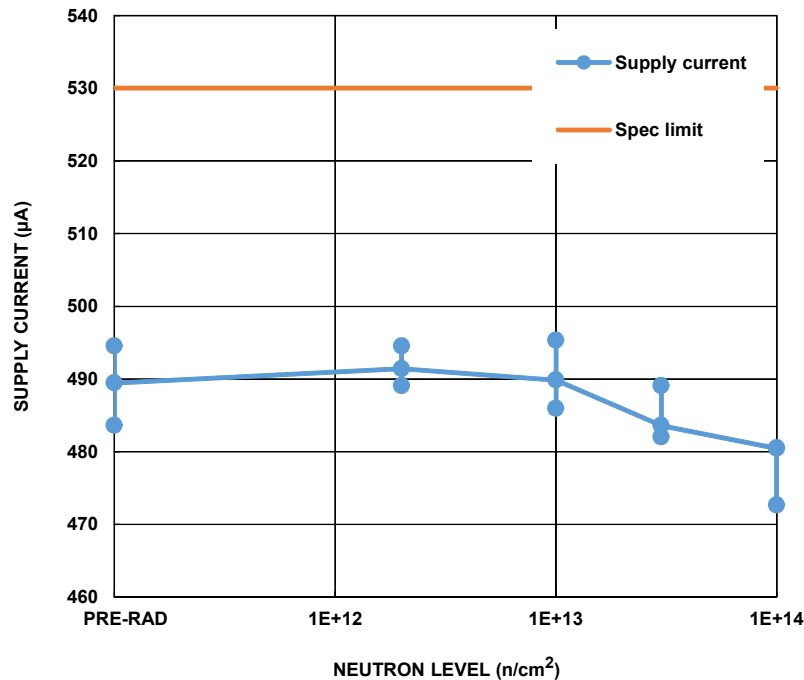


FIGURE 1. ISL705AEH supply current, V_{DD} = 5.5V, as a function of 1MeV equivalent neutron irradiation at 2x10¹²n/cm², 1x10¹³n/cm², 3x10¹³n/cm² and 1x10¹⁴n/cm². The plot shows the population median, minimum and maximum at each downpoint. Sample size for each cell was 5. The post-total dose irradiation SMD limit is 530µA maximum.

Variables Data Plots (Continued)

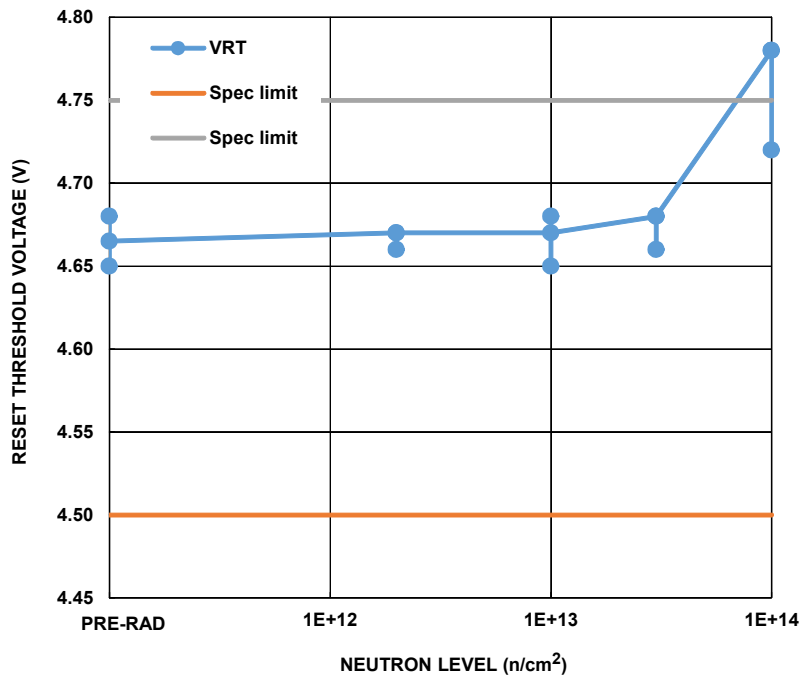


FIGURE 2. ISL705AEH reset threshold voltage as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 4.5V to 4.75V.

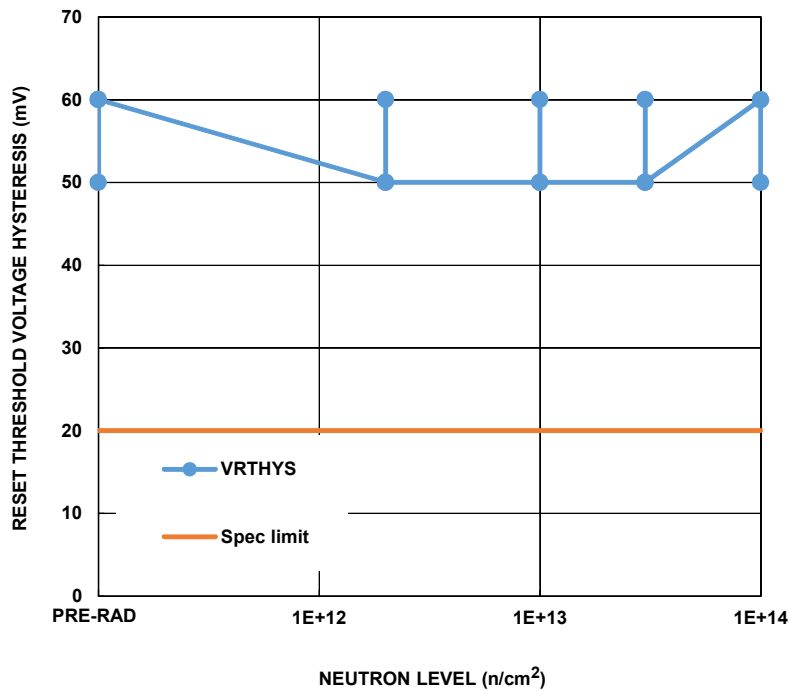


FIGURE 3. ISL705AEH reset threshold voltage hysteresis as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limit is 20mV minimum.

Variables Data Plots (Continued)

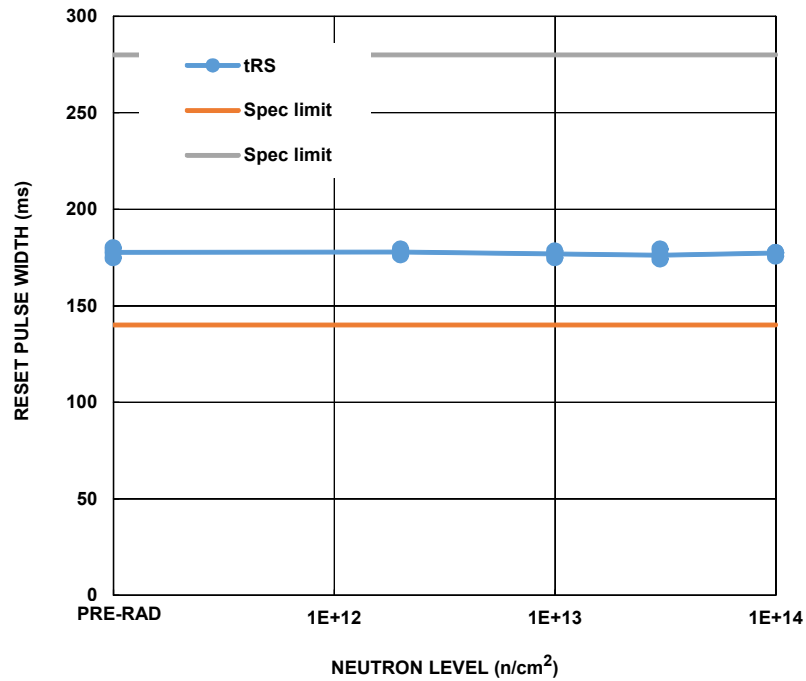


FIGURE 4. ISL705AEH reset pulse width as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 140ms to 280ms.

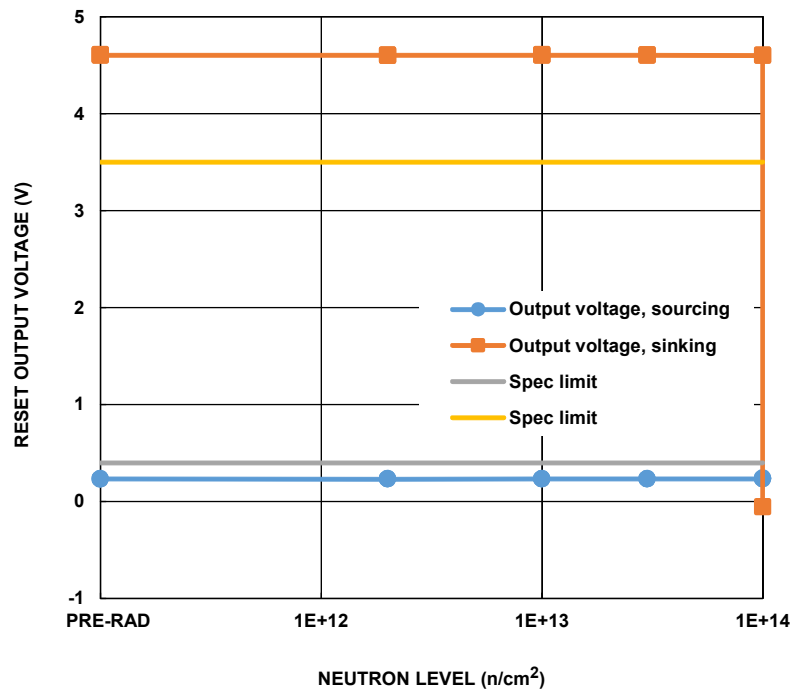


FIGURE 5. ISL705AEH reset output voltage, sourcing (800µA) and sinking (3.2mA), as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 3.5V minimum (sourcing) and 0.4V maximum (sinking).

Variables Data Plots (Continued)

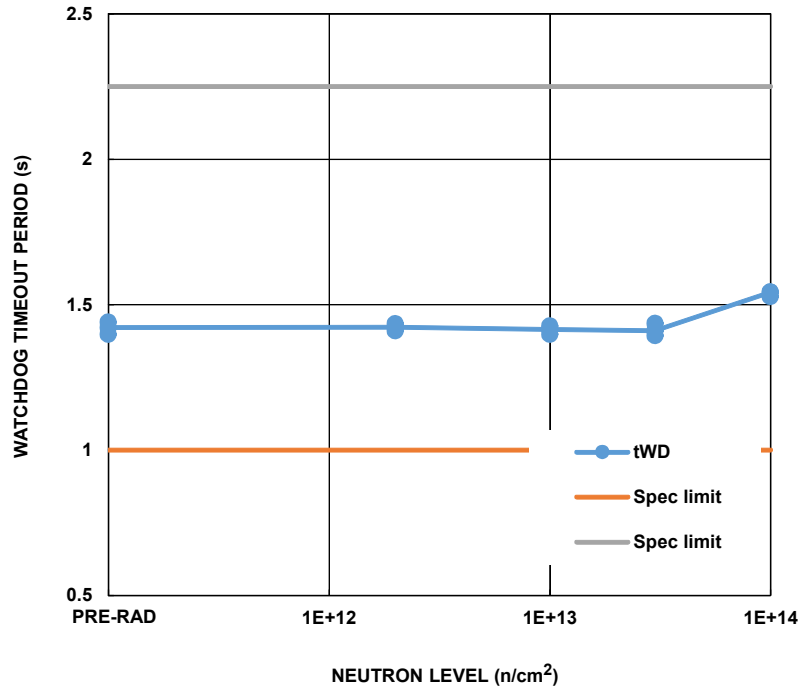


FIGURE 6. ISL705AEH watchdog timeout period as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 1s to 2.25s.

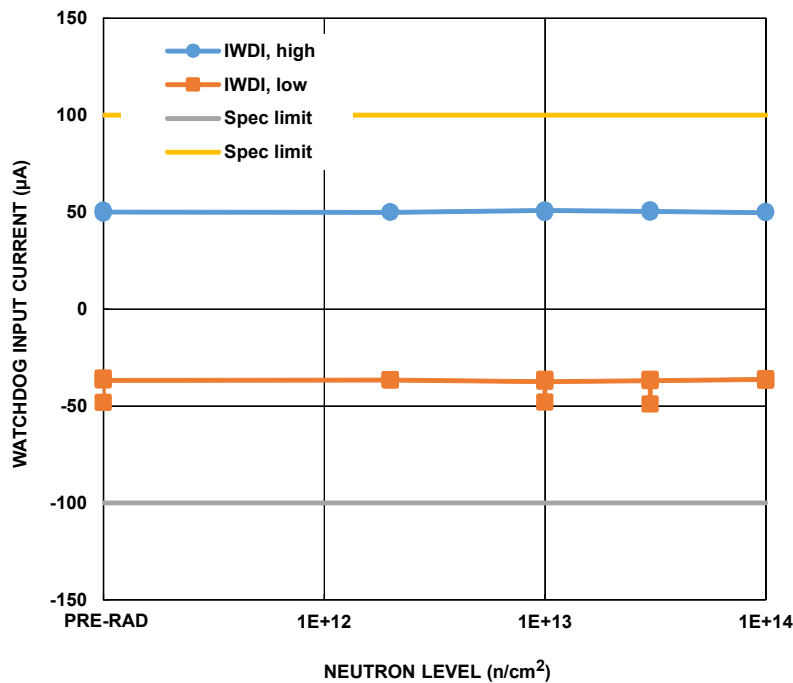


FIGURE 7. ISL705AEH watchdog input current, HIGH and LOW, as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 100µA maximum (HIGH) and -100µA minimum (LOW).

Variables Data Plots (Continued)

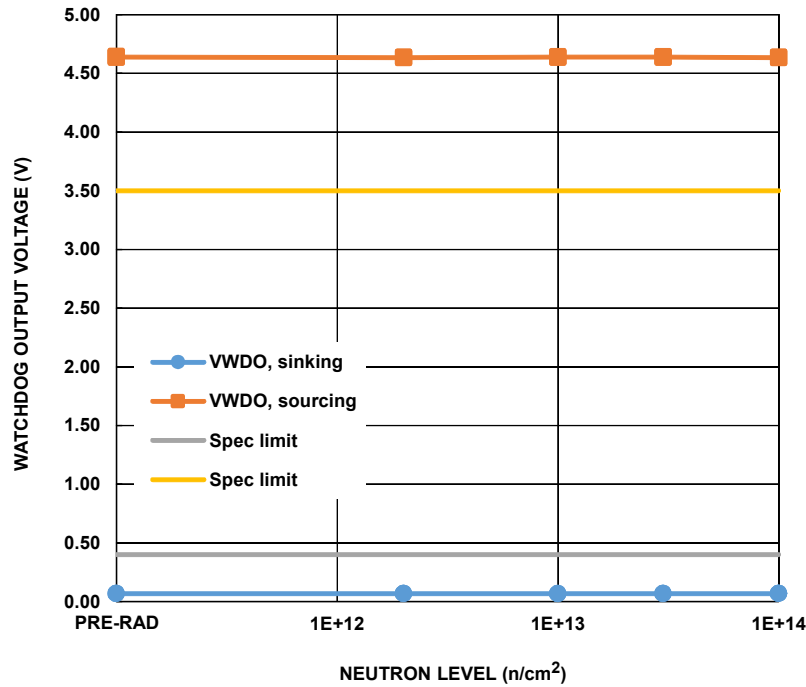


FIGURE 8. ISL705AEH watchdog output voltage, sourcing (800µA) and sinking (-800µA), as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 3.5V minimum (sourcing) and 0.4V maximum (sinking).

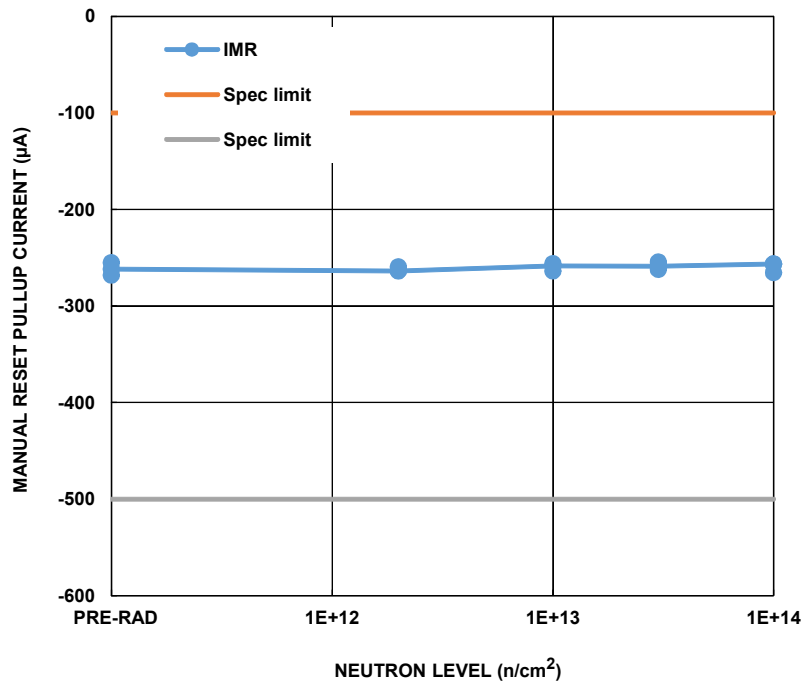


FIGURE 9. ISL705AEH manual reset pull-up current as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are -500µA to -100µA.

Variables Data Plots (Continued)

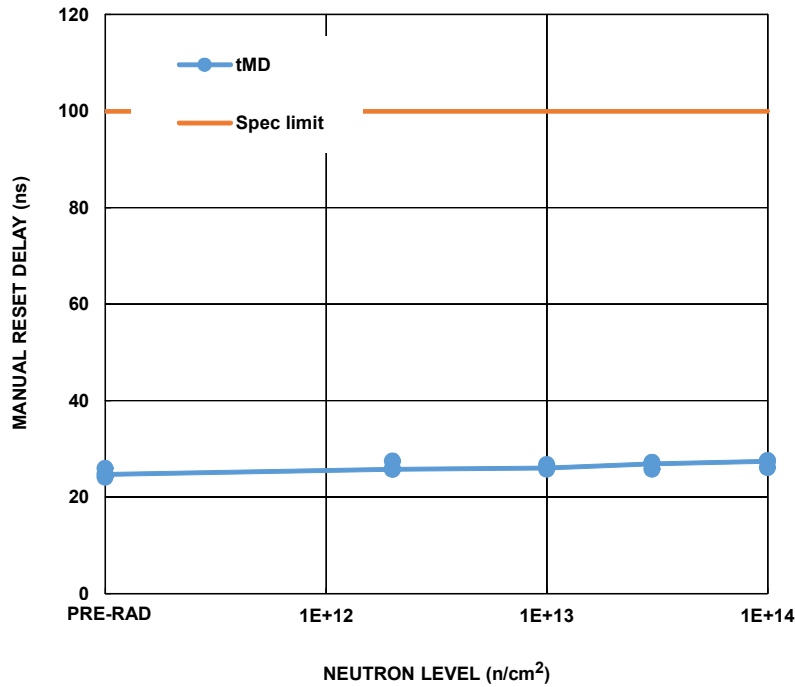


FIGURE 10. ISL705AEH manual reset delay as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limit is 100ns maximum.

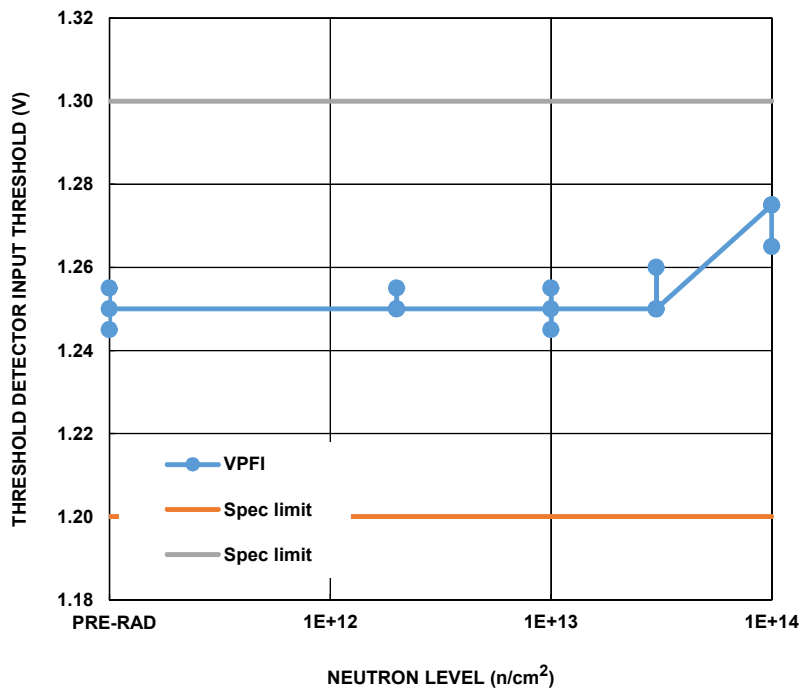


FIGURE 11. ISL705AEH threshold detector input threshold voltage as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 1.2V to 1.3V.

Variables Data Plots (Continued)

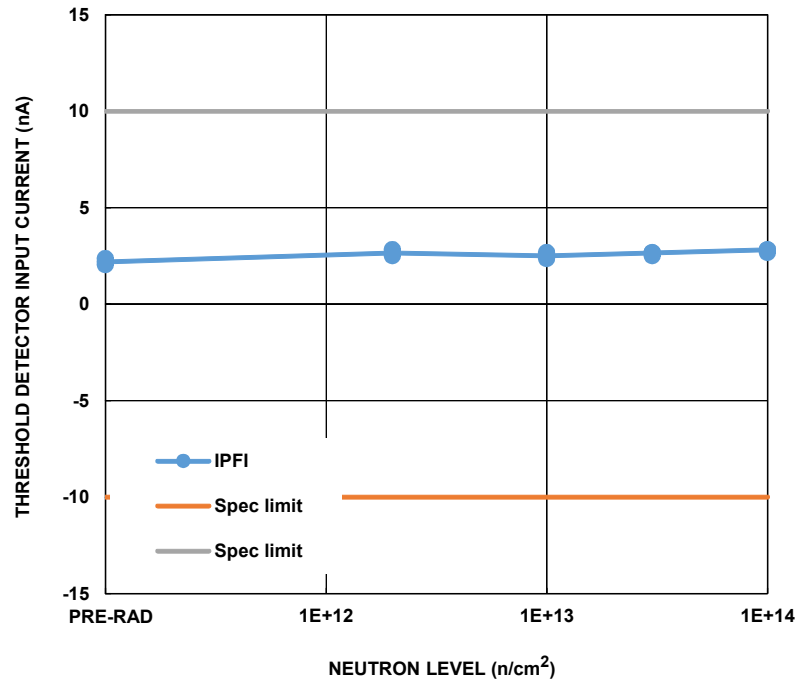


FIGURE 12. ISL705AEH threshold detector input current as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are -10nA to 10nA.

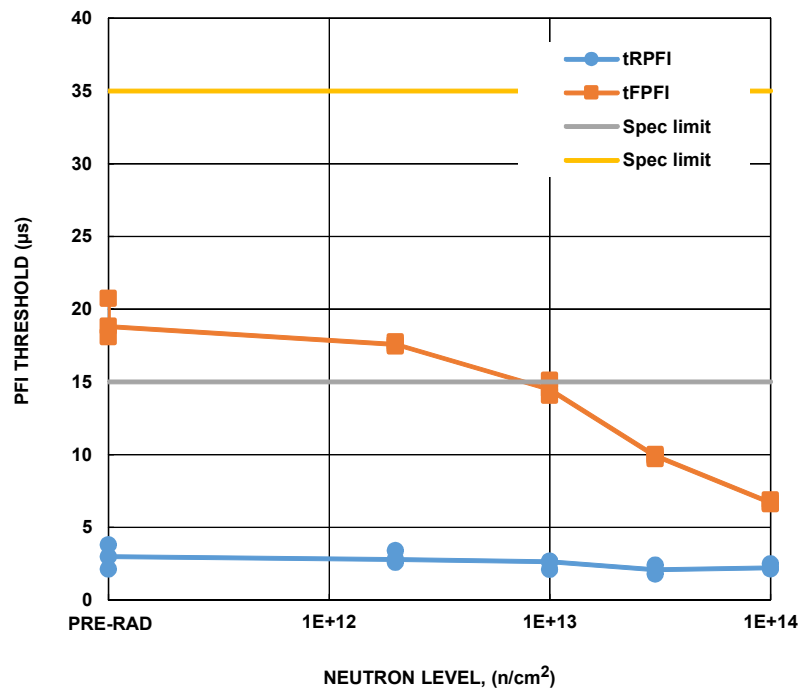


FIGURE 13. ISL705AEH threshold detector input rising threshold crossing to threshold detector output delay and falling threshold crossing to threshold detector output delay as a function of 1MeV equivalent neutron irradiation at $2 \times 10^{12} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$, $3 \times 10^{13} \text{ n/cm}^2$ and $1 \times 10^{14} \text{ n/cm}^2$. The plot shows the population median, minimum and maximum at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 15µs maximum (rising) and 35µs maximum (falling).

Conclusion

This report summarizes results of 1MeV equivalent neutron testing of the ISL705AEH microprocessor supervisory circuit. The test was conducted in order to determine the sensitivity of the part to Displacement Damage (DD) caused by neutron or proton environments in space. Neutron fluences ranged from $2 \times 10^{12} \text{ n/cm}^2$ to $1 \times 10^{14} \text{ n/cm}^2$. This test was carried out as part of a collaborative project with Boeing (El Segundo, CA), whose support is gratefully acknowledged.

The samples met all specifications ('Bin 1') after $2 \times 10^{11} \text{ n/cm}^2$, $1 \times 10^{13} \text{ n/cm}^2$ and $3 \times 10^{13} \text{ n/cm}^2$. One sample was nonfunctional after the $1 \times 10^{14} \text{ n/cm}^2$ irradiation testing.

Appendices

Reported Parameters

Reported parameters are shown in [Table 3](#). The limits are taken from the applicable SMD and are provided for guidance only as the part is not designed or guaranteed for the neutron environment. The plots show the population median and minimum and maximum error bars at each datapoint.

TABLE 3. REPORTED PARAMETERS

FIGURE	PARAMETER	LIMIT, LOW	LIMIT, HIGH	UNIT	NOTES
1	Supply current	-	530	μA	$V_{DD} = 5.5\text{V}$
2	Reset threshold voltage	4.5	4.75	V	
3	Reset threshold hysteresis	-	20	mV	
4	Reset pulse width	140	280	ms	
5	Reset output voltage	3.5	-	V	Sourcing, 800 μA
	Reset output voltage	-	0.4	V	Sinking, 3.2mA
6	Watchdog timeout period	1	2.25	s	
7	Watchdog input current	-	100	μA	HIGH
	Watchdog input current	-100	-	μA	LOW
8	Watchdog output voltage	3.5	-	V	Sourcing, 800 μA
	Watchdog output voltage	-	0.4	V	Sinking, -800 μA
9	Manual reset pullup current	-500	-100	μA	
10	Manual reset delay	-	100	ns	
11	Threshold detector input threshold	1.2	1.3	V	
12	Threshold detector input current	-10	10	nA	
13	Threshold detector delay	-	15	μs	Rising
	Threshold detector delay	-	35	μs	Falling

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338