

ISL78845ASEH

Neutron Testing

TR006  
Rev 0.00  
May 12, 2015

## Introduction

This report summarizes results of 1MeV equivalent neutron testing of the [ISL78845ASEH](#) current mode PWM controller. The test was conducted in order to determine the sensitivity of the part to the Displacement Damage (DD) caused by the neutron environment. Neutron fluences ranged from  $2 \times 10^{11} \text{ n/cm}^2$  to  $1 \times 10^{14} \text{ n/cm}^2$ . This project was carried out in collaboration with Honeywell Aerospace (Clearwater, FL), and their support is gratefully acknowledged.

## Part Description

The ISL78845ASEH is a high performance, radiation hardened drop-in replacement for the popular 28C4x and 18C4x PWM controllers and is suitable for a wide range of power conversion applications including boost, flyback and isolated output configurations. Its fast signal propagation and output switching characteristics make this an ideal product for existing and new designs. Features include up to 13.2V operation, low operating current, 90 $\mu$ A typical start-up current, adjustable operating frequency to 1MHz, and high peak current drive capability with 50ns rise and fall times.

There are four variants of this part: the ISL78840SEH with rising Undervoltage Lockout (UVLO) threshold of 7V and 100% maximum duty cycle, the ISL78841SEH with rising UVLO threshold of 7V and 50% maximum duty cycle, the ISL78843SEH with rising UVLO threshold of 8.4V and 100% maximum duty cycle and finally the ISL78845ASEH with rising UVLO threshold of 8.4V and 50% maximum duty cycle. The four variants are closely similar and the ISL78845ASEH data discussed in this report is considered applicable to the other three variants.

The ISL78845ASEH is available in an 8 Ld hermetic ceramic flatpack and in die form and offers guaranteed performance across the full -55°C to +125°C military temperature range.

## Test Description

### Irradiation Facilities

Neutron irradiation was performed by the Honeywell team at the Fast Burst Reactor facility at White Sands Missile Range (White Sands, NM), which provides a controlled 1MeV equivalent neutron flux. Parts were tested in an unbiased configuration with all leads shorted together. As neutron irradiation activates many of the elements found in a packaged integrated circuit, the parts exposed at the higher neutron levels required (as expected) significant 'cooldown' time before being shipped back to Intersil (Palm Bay, FL) for electrical testing.

### Characterization equipment and procedures

Electrical testing was performed before and after irradiation using the Intersil production Automated Test Equipment (ATE). All electrical testing was performed at room temperature.

### Experimental matrix

Testing proceeded in general accordance with the guidelines of MIL-STD-883 Test Method 1017. The experimental matrix consisted of six samples irradiated at  $2.2 \times 10^{11} \text{ n/cm}^2$ , six samples irradiated at  $4.4 \times 10^{11} \text{ n/cm}^2$ , six samples irradiated at  $6.6 \times 10^{11} \text{ n/cm}^2$ , three samples irradiated at  $1 \times 10^{12} \text{ n/cm}^2$ , three samples irradiated at  $1 \times 10^{13} \text{ n/cm}^2$  and five samples irradiated at  $1 \times 10^{14} \text{ n/cm}^2$ . Two control units were used to insure repeatability. Samples were taken from current production inventory.

## Results

### Test results

Neutron testing of the ISL78845ASEH is complete and the results are reported in the balance of this report. It should be realized when reviewing the data that each neutron irradiation was made on a different 6- or 3-unit sample; this is not total dose testing, where the damage is cumulative.

### Variables data

The plots in [Figures 1](#) through [20](#) show data plots for key parameters before and after irradiation to each level. The plots show the median, minimum and maximum of each parameter for each of the four amplifier channels as a function of neutron irradiation. We chose to plot the median because of the small sample sizes involved. We also show the applicable electrical limits taken from the SMD, this for guidance only as the ISL78845ASEH is not specified for neutron irradiation.

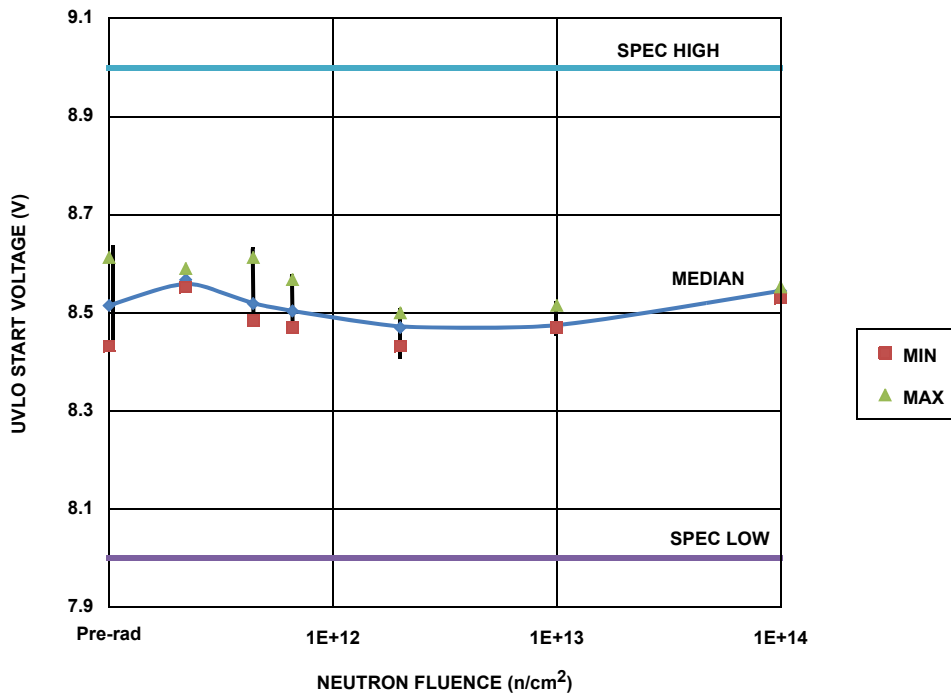


FIGURE 1. ISL78845ASEH Undervoltage Lockout (UVLO) START threshold voltage as a function of neutron irradiation, showing the median, minimum and maximum of the populations following irradiation to each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). For reference, the SMD limits are 8V to 9V. (21)

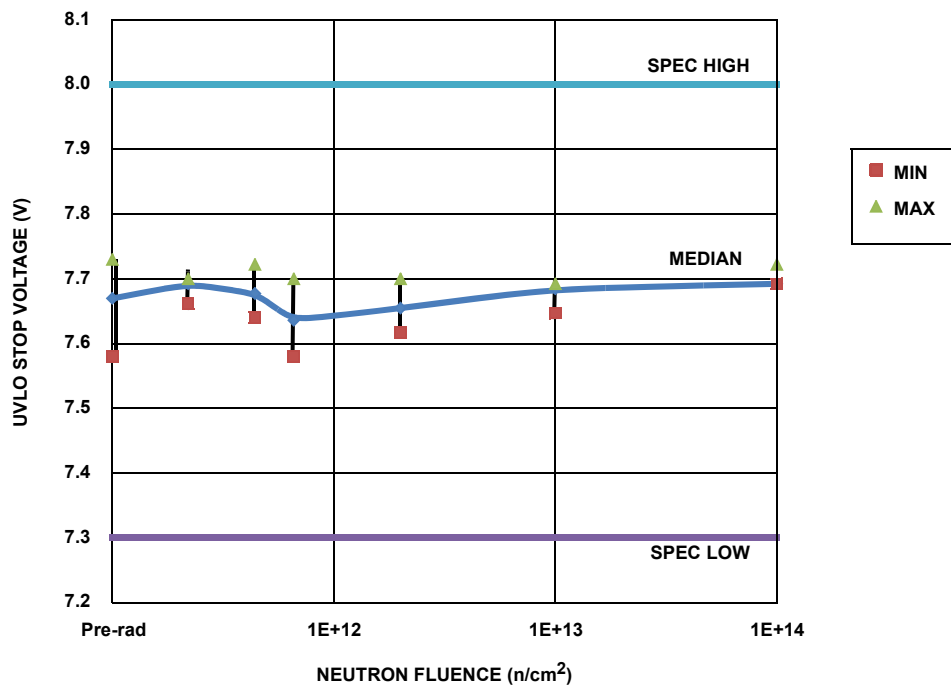


FIGURE 2. ISL78845ASEH UVLO STOP threshold voltage as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). For reference, the SMD limits are 7.3V to 8V. (22)

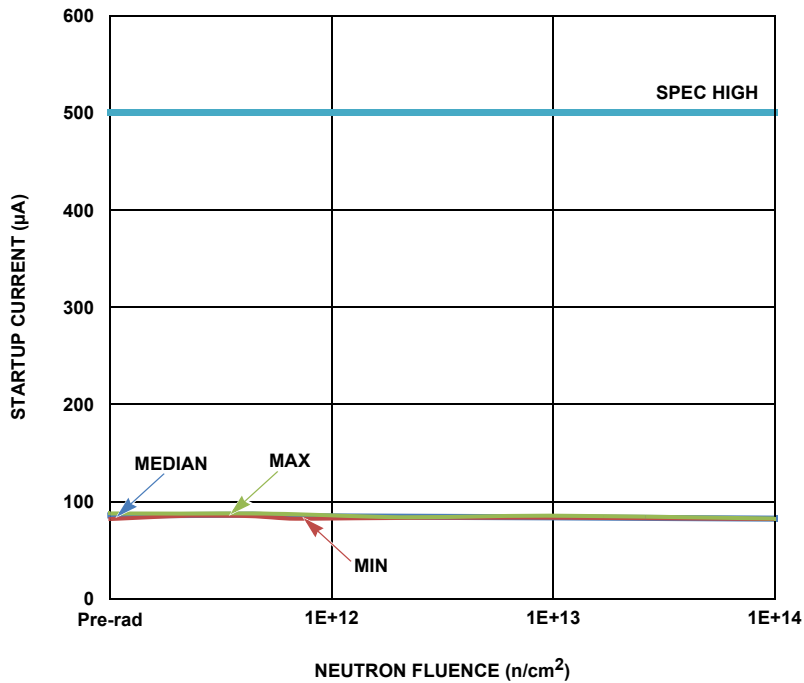


FIGURE 3. ISL78845ASEH startup current as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $4.4 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $6.6 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $1 \times 10^{12}$  n/cm<sup>2</sup> (3 samples),  $1 \times 10^{13}$  n/cm<sup>2</sup> (3 samples) and  $1 \times 10^{14}$  n/cm<sup>2</sup> (3 samples). For reference, the post-irradiation SMD limit is 500µA.

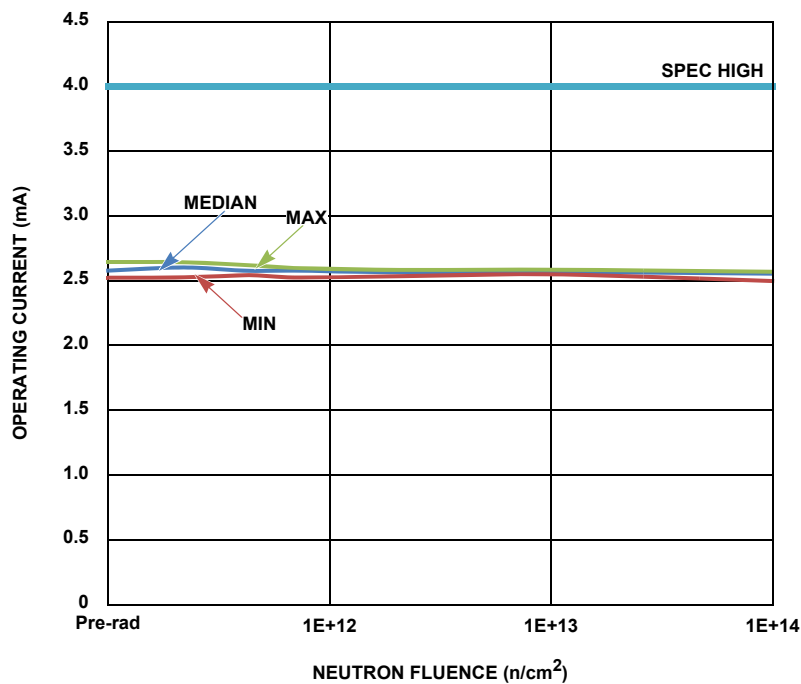


FIGURE 4. ISL78845ASEH operating current as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $4.4 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $6.6 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $1 \times 10^{12}$  n/cm<sup>2</sup> (3 samples),  $1 \times 10^{13}$  n/cm<sup>2</sup> (3 samples) and  $1 \times 10^{14}$  n/cm<sup>2</sup> (3 samples). The SMD limit is 4mA maximum.

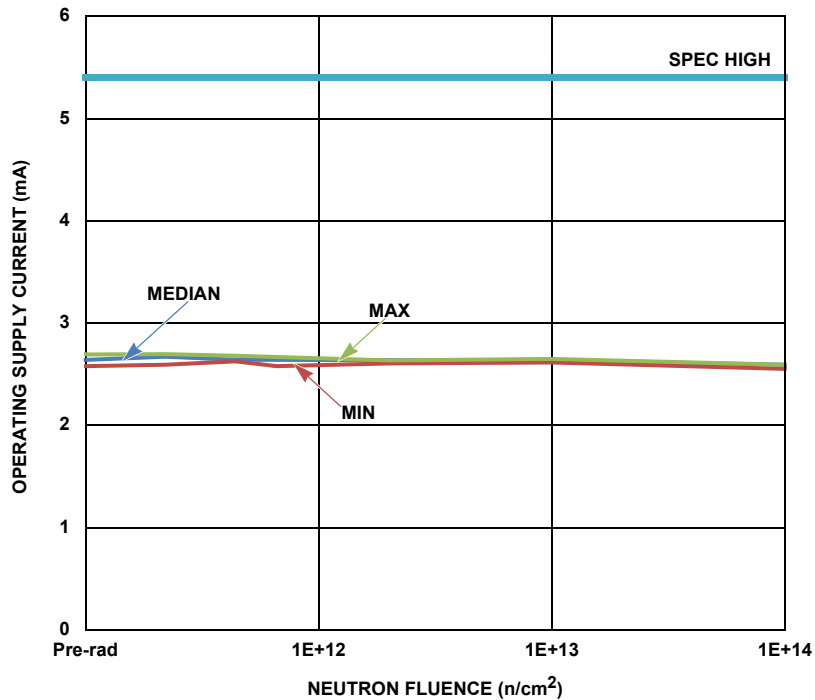


FIGURE 5. ISL78845ASEH operating supply current as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limit is 5.5mA maximum.

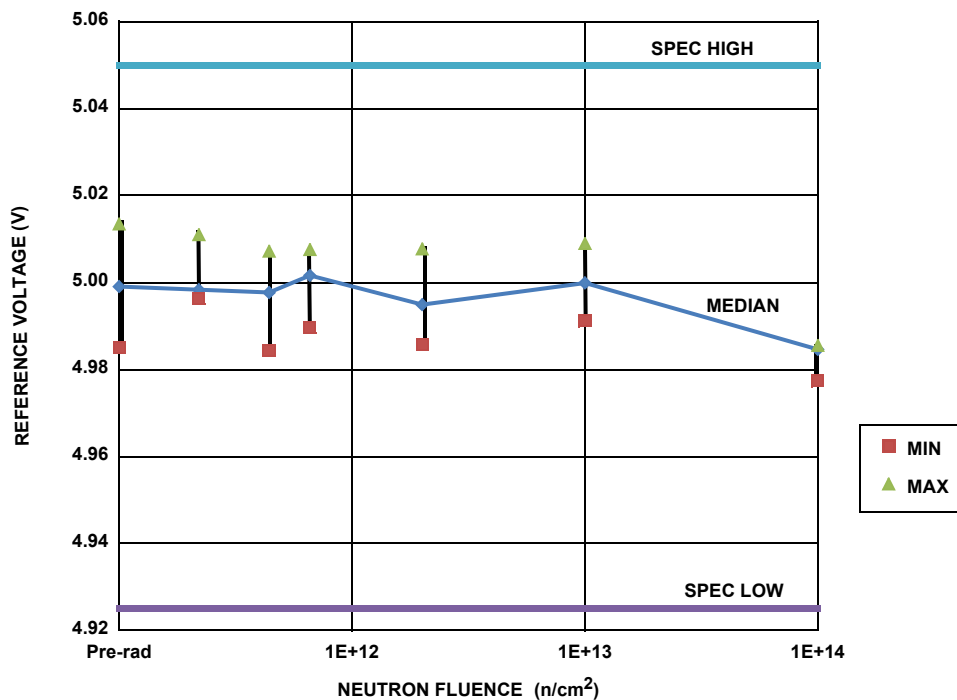


FIGURE 6. ISL78845ASEH reference voltage accuracy as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limits are 4.925V to 5.050V.

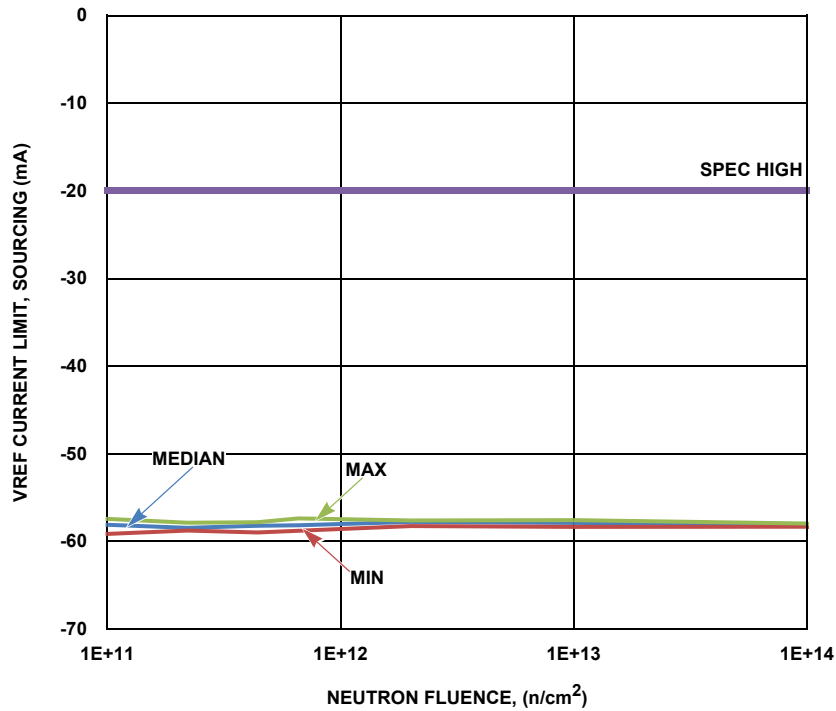


FIGURE 7. ISL78845ASEH reference current limit, sourcing, as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limit is -20mA minimum.

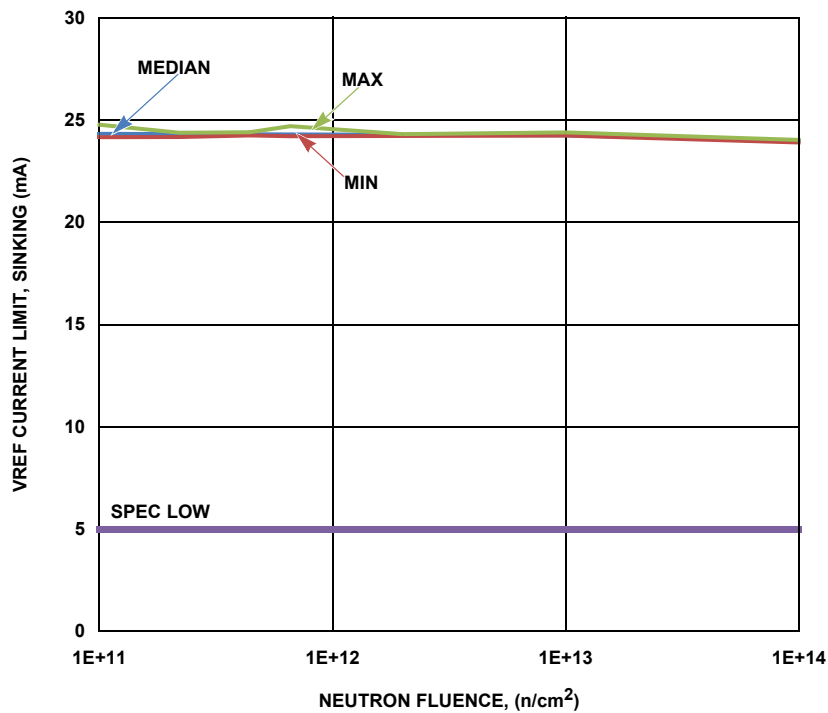


FIGURE 8. ISL78845ASEH reference current limit, sinking, as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limit is 5mA minimum.

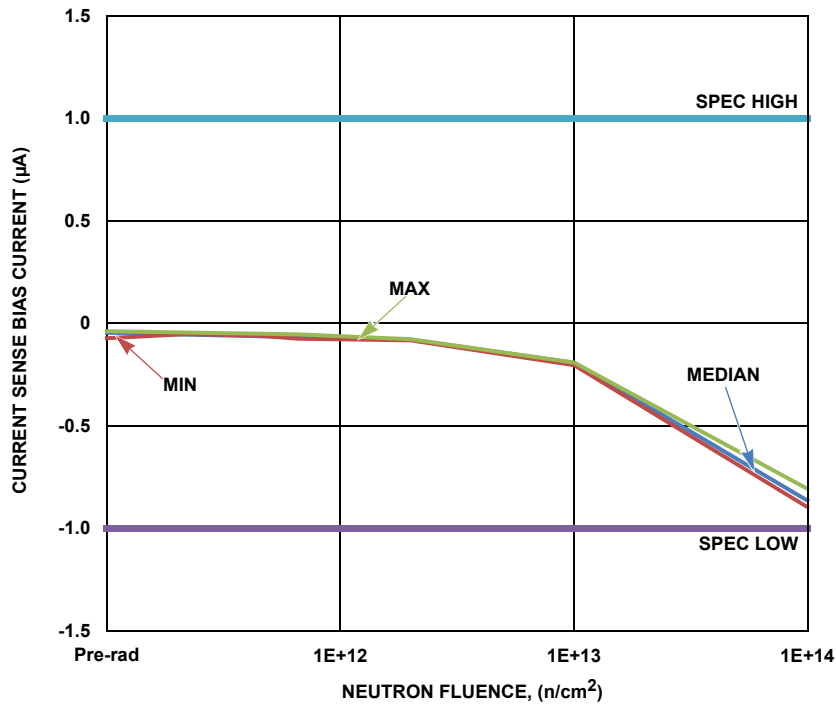


FIGURE 9. ISL78845ASEH current sense input bias current as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $4.4 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $6.6 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $1 \times 10^{12}$  n/cm<sup>2</sup> (3 samples),  $1 \times 10^{13}$  n/cm<sup>2</sup> (3 samples) and  $1 \times 10^{14}$  n/cm<sup>2</sup> (3 samples). The SMD limits are -1µA to 1µA.

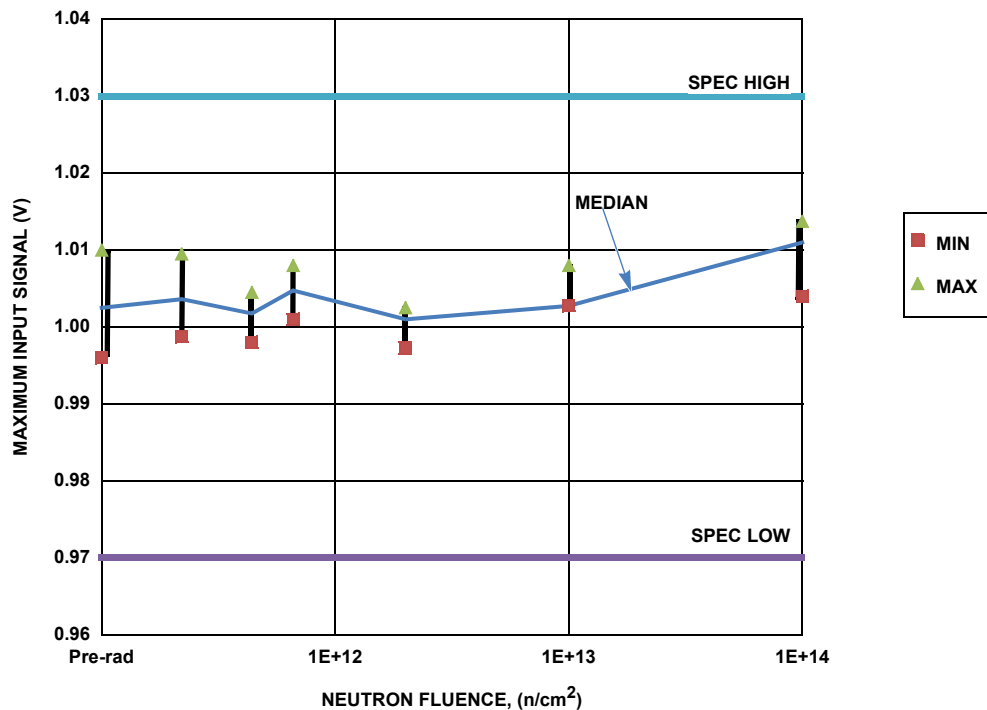


FIGURE 10. ISL78845ASEH current sense maximum input signal as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $4.4 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $6.6 \times 10^{11}$  n/cm<sup>2</sup> (6 samples),  $1 \times 10^{12}$  n/cm<sup>2</sup> (3 samples),  $1 \times 10^{13}$  n/cm<sup>2</sup> (3 samples) and  $1 \times 10^{14}$  n/cm<sup>2</sup> (3 samples). The SMD limits are 0.97V to 1.03V.

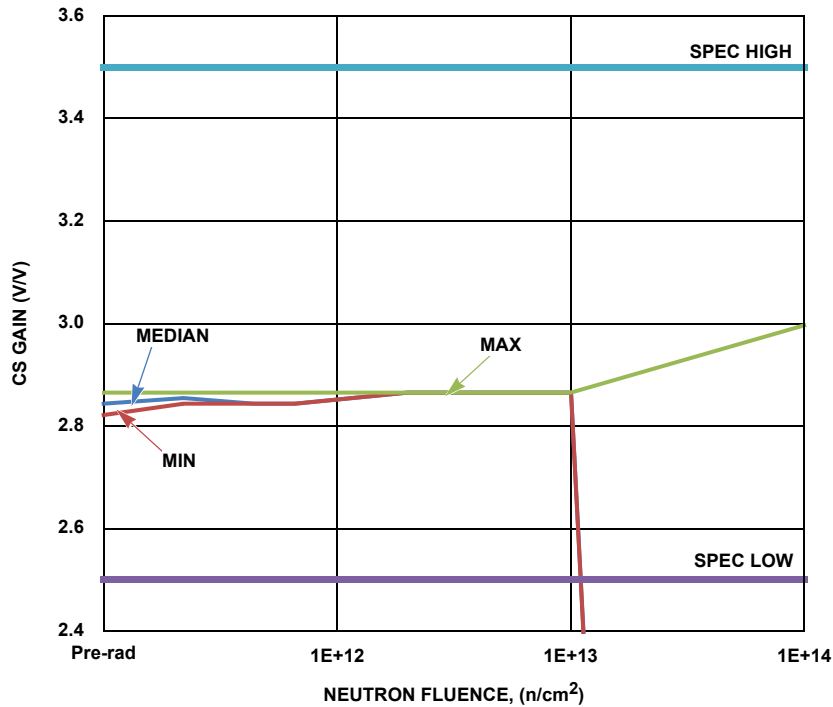


FIGURE 11. ISL78845ASEH current sense gain ( $A_{CS} = \Delta V_{COMP} / \Delta V_{CS}$ ) as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limits are 2.5V/V to 3.5V/V. Two out of three samples were nonfunctional after irradiation to  $1 \times 10^{14} \text{ n/cm}^2$ .

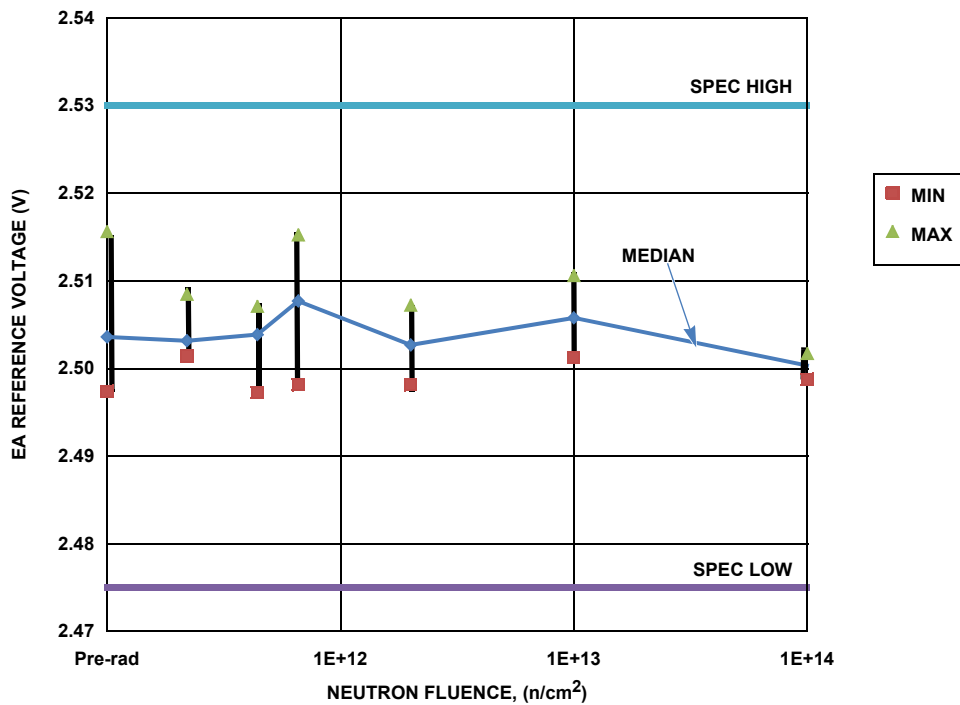


FIGURE 12. ISL78845ASEH error amplifier reference as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limits are 2.475V to 2.530V.

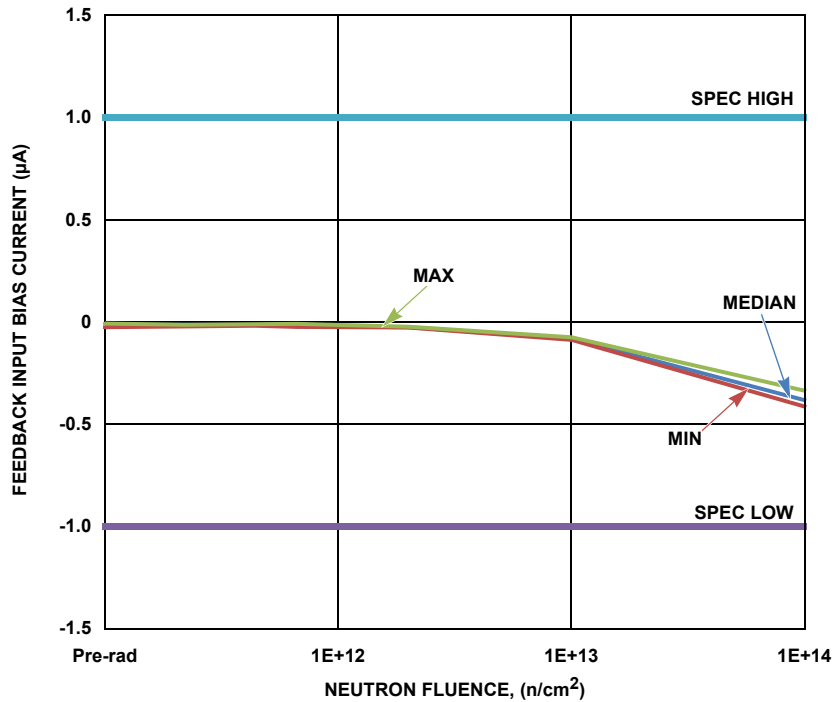


FIGURE 13. ISL78845ASEH error amplifier input bias current as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limits are  $-1 \mu\text{A}$  to  $1 \mu\text{A}$ .

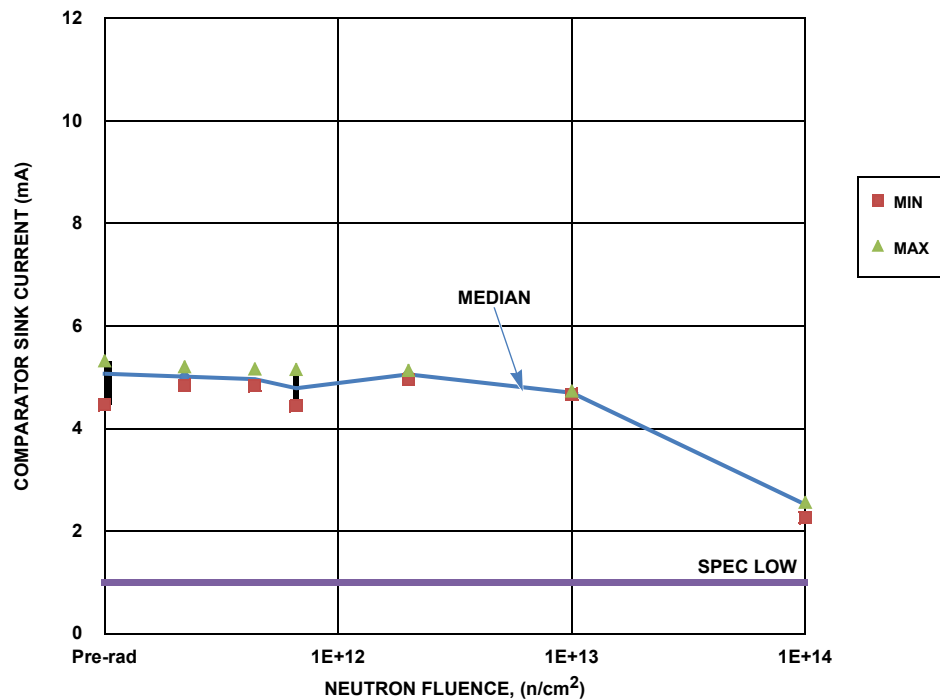


FIGURE 14. ISL78845ASEH error amplifier sink current as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limit is 1mA minimum.



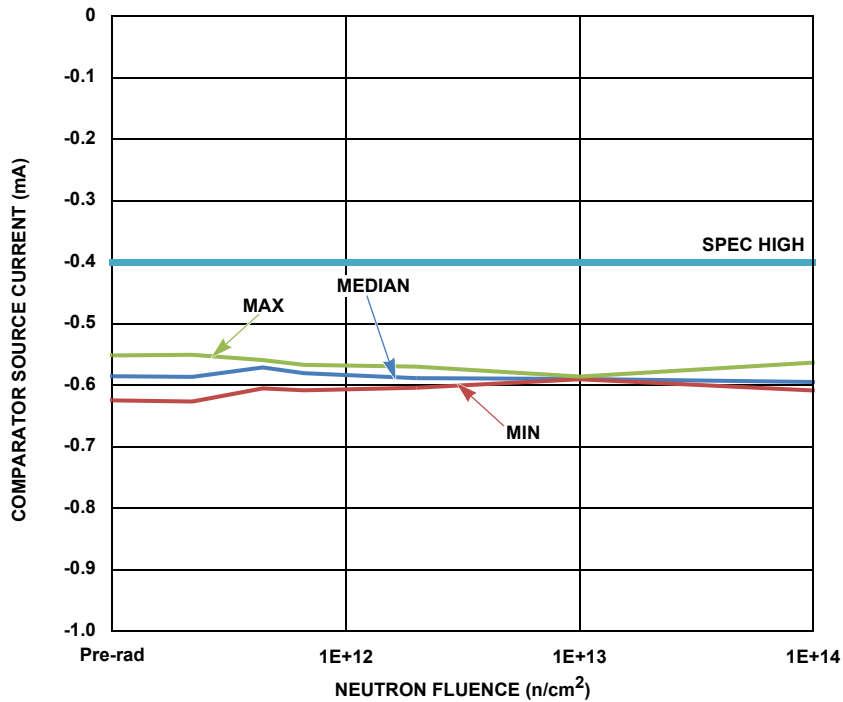


FIGURE 15. ISL78845ASEH error amplifier source current as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limit is -0.4mA minimum.

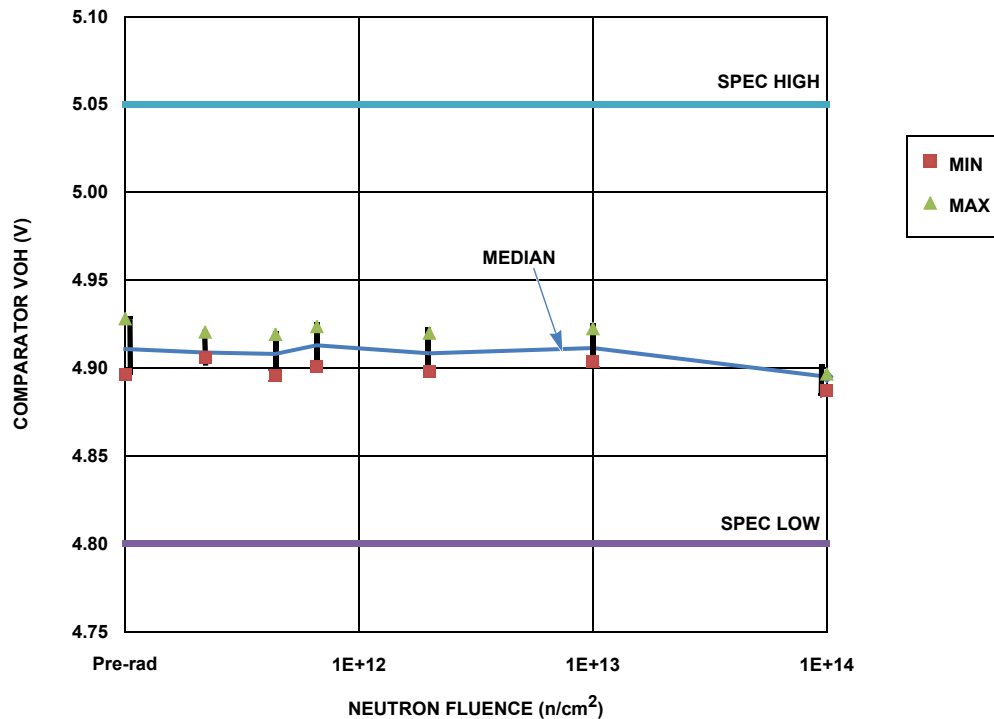


FIGURE 16. ISL78845ASEH error amplifier HIGH output voltage as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limits are 4.80V to 5.050V.

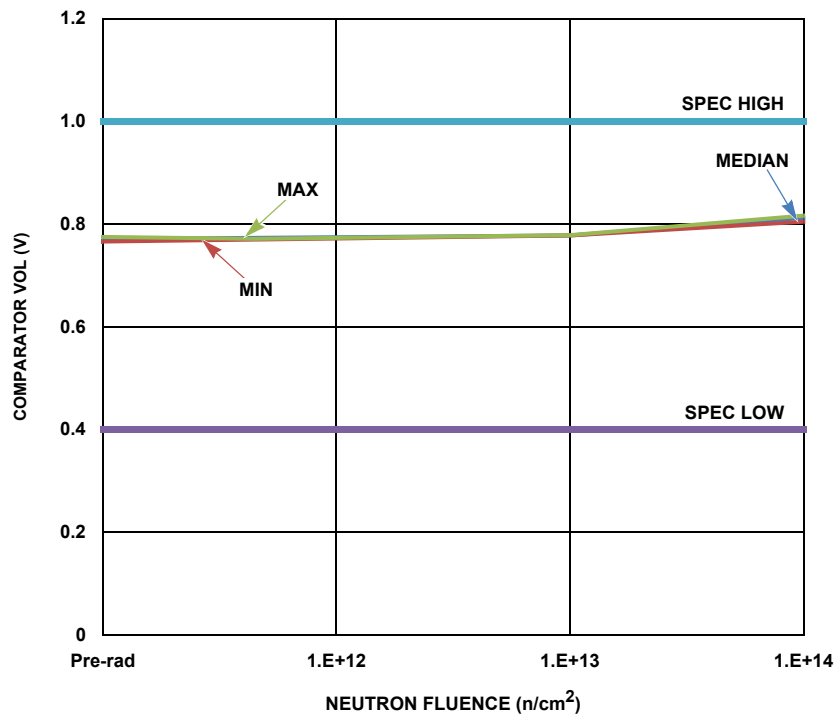


FIGURE 17. ISL78845ASEH error amplifier LOW output voltage as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limits are 0.4V to 1V.

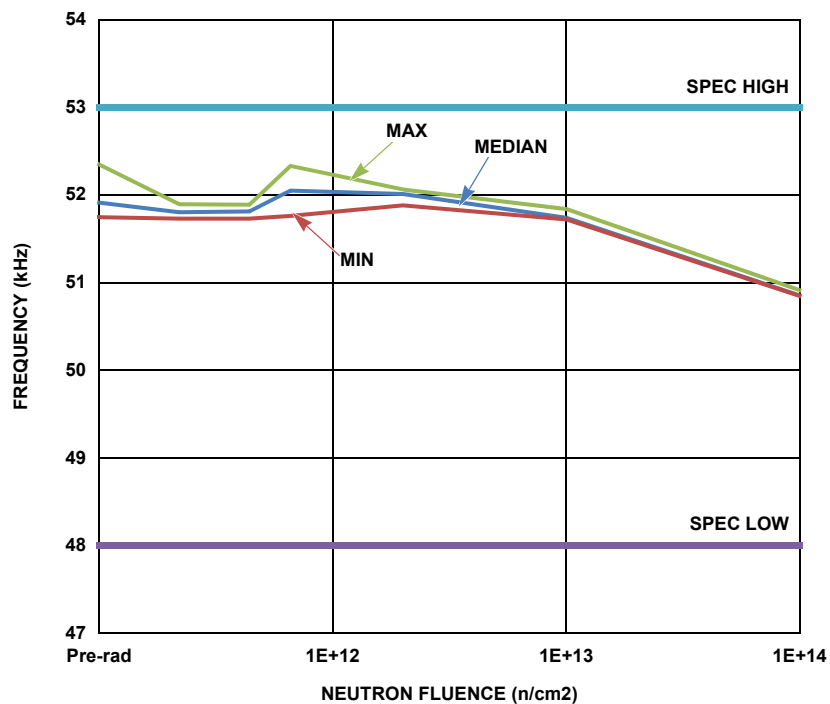


FIGURE 18. ISL78845ASEH oscillator frequency as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limits are 48kHz to 53kHz.

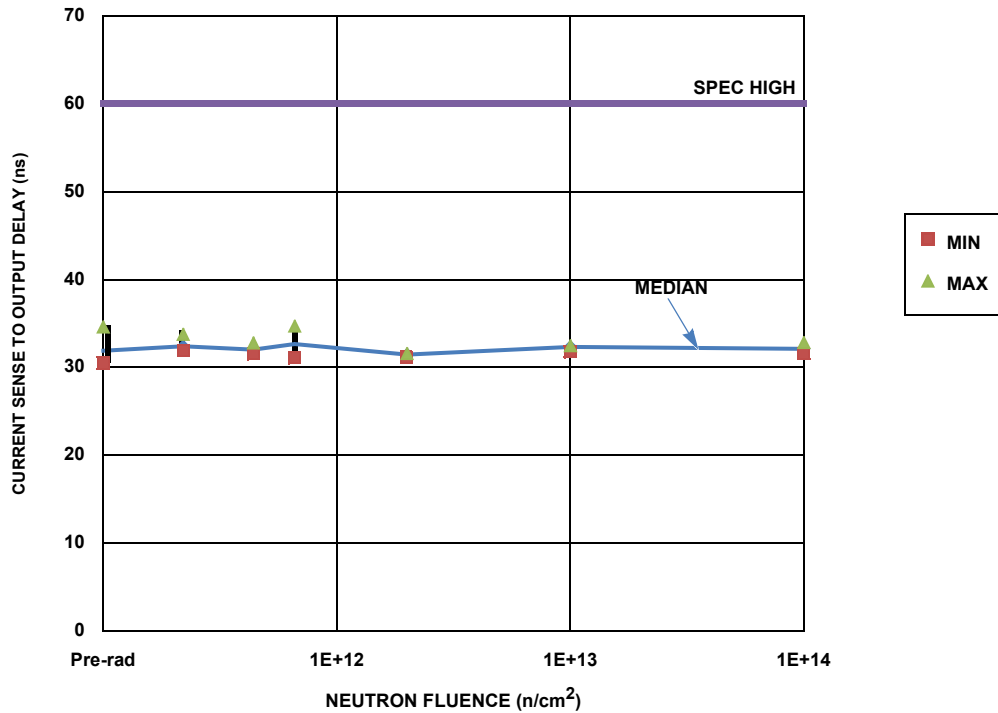


FIGURE 19. ISL78845ASEH current sense to output delay as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limit is 60ns maximum.

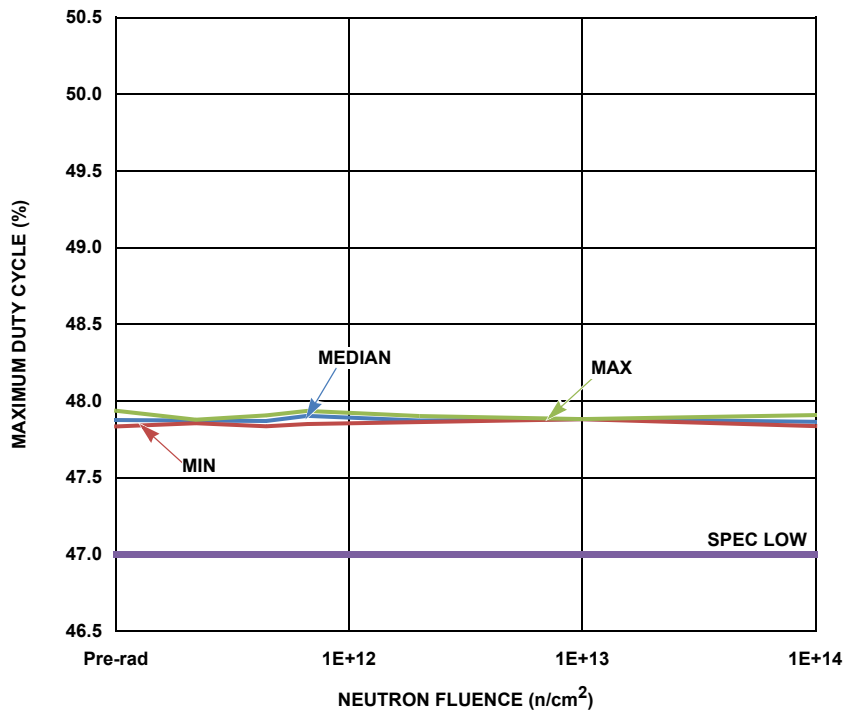


FIGURE 20. ISL78845ASEH maximum duty cycle as a function of neutron irradiation, showing the median, minimum and maximum of the populations at each level. Neutron fluences and sample sizes (in parentheses) were  $2.2 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $4.4 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $6.6 \times 10^{11} \text{ n/cm}^2$  (6 samples),  $1 \times 10^{12} \text{ n/cm}^2$  (3 samples),  $1 \times 10^{13} \text{ n/cm}^2$  (3 samples) and  $1 \times 10^{14} \text{ n/cm}^2$  (3 samples). The SMD limit is 47% minimum.

## Discussion and conclusion

This document reports the results of neutron testing of the ISL78845ASEH current mode PWM controller. Samples were irradiated to levels of  $2.2 \times 10^{11} \text{ n/cm}^2$ ,  $4.4 \times 10^{11} \text{ n/cm}^2$ ,  $6.6 \times 10^{11} \text{ n/cm}^2$ ,  $1 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ , with sample sizes of six each for the first three cells and three each for the last three cells. It should again be carefully realized when interpreting the attributes and variables data that each neutron irradiation was performed on a different sample; this is not total dose testing, where a single set of samples is used and the damage is cumulative. ATE characterization testing was performed before and after the irradiations, and two control units were used to insure repeatable data. Variables data for monitored parameters is presented in [Figures 1](#) through [20](#).

The ISL78845ASEH is not formally designed for neutron hardness. The part is built in a junction-isolated submicron BiCMOS process; the bipolar transistors are minority carrier devices, obviously, and may be expected to be sensitive to Displacement Damage (DD) at the higher neutron levels. This expectation turned out to be correct. We will discuss the results on a parameter by parameter basis and then draw some conclusions.

The Undervoltage Lockout (UVLO) START and STOP threshold voltages ([Figures 1](#) and [2](#)) showed good stability after all neutron levels.

The startup current, operating current and operating supply current ([Figures 3](#) through [5](#)) showed excellent stability after all neutron levels.

The reference voltage accuracy ([Figure 6](#)) showed good stability after all neutron levels, with a gradually decreasing range at the higher levels.

The reference sourcing and sinking current limits ([Figures 7](#) and [8](#)) showed excellent stability after all neutron levels.

The current sense input bias current ([Figure 9](#)) showed good stability to the  $1 \times 10^{13} \text{ n/cm}^2$  level but decreased significantly after  $1 \times 10^{14} \text{ n/cm}^2$ . The parameter was near the lower SMD limit after  $1 \times 10^{14} \text{ n/cm}^2$ .

The current sense maximum input signal ([Figure 10](#)) showed some degradation at the highest two neutron levels but remained well within the SMD limits.

The current sense gain ([Figure 11](#)) showed good stability at the lower levels but was nonfunctional after  $1 \times 10^{14} \text{ n/cm}^2$ , with two of the three samples failing this test.

The error amplifier reference voltage ([Figure 12](#)) showed good stability after all neutron levels.

The error amplifier input bias current and sink current ([Figures 13](#) and [14](#)) showed good stability to the  $1 \times 10^{13} \text{ n/cm}^2$  level but decreased significantly after  $1 \times 10^{14} \text{ n/cm}^2$ . Both parameters remained within the SMD limits.

The error amplifier source current ([Figure 15](#)) showed good stability after all neutron levels.

The error amplifier HIGH and LOW output voltages ([Figures 16](#) and [17](#)) showed good stability to the  $1 \times 10^{13} \text{ n/cm}^2$  level with slight decreases after  $1 \times 10^{14} \text{ n/cm}^2$ .

The oscillator frequency ([Figure 18](#)) showed good stability to the  $1 \times 10^{13} \text{ n/cm}^2$  level but decreased significantly after  $1 \times 10^{14} \text{ n/cm}^2$ . The parameter remained well within the SMD limits.

The current sense to output delay ([Figure 19](#)) showed good stability after all neutron levels.

The maximum duty cycle ([Figure 20](#)) showed good stability after all neutron levels.

We conclude that the ISL78845ASEH is capable of post  $1 \times 10^{13} \text{ n/cm}^2$  operation (likely with some relaxation of parametric specifications for some parameters) within the SMD post-total dose parameters. The part is not capable of post  $1 \times 10^{14} \text{ n/cm}^2$  operation as it was nonfunctional, failing the current sense gain parameter.

## Appendices

TABLE 1. REPORTED PARAMETERS

FIGURE	PARAMETER	LIMIT, LOW	LIMIT, HIGH	UNIT
1	UVLO START Threshold Voltage	8	9	V
2	UVLO STOP Threshold Voltage	7.3	8	V
3	Startup Current	-	500	μA
4	Operating Current	-	4	mA
5	Operating Supply Current	-	5.5	mA
6	Reference Voltage Accuracy	4.925	5.050	V
7	Reference Current Limit, Sourcing	-20	-	mA
8	Reference Current Limit, Sinking	5	-	mA
9	Current Sense Input Bias Current	-1	1	μA
10	Current Sense Maximum Input Signal	0.97	1.03	V
11	Current Sense Gain	2.5	3.5	V/V
12	Error Amplifier Reference Voltage	2.475	2.530	V
13	Error Amplifier Input Bias Current	-1	1	μA
14	Error Amplifier Sink Current	1	-	mA
15	Error Amplifier Source Current	-0.4	-	mA
16	Error Amplifier HIGH Output Voltage	4.80	5.05	V
17	Error Amplifier LOW Output Voltage	0.4	1	V
18	Oscillator Frequency	48	53	kHz
19	Current Sense To Output Delay	-	60	ns
20	Maximum Duty Cycle	47	-	%

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.  
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.  
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.  
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.  
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.  
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



### SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

**Renesas Electronics America Inc.**  
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.  
Tel: +1-408-432-8888, Fax: +1-408-434-5351

**Renesas Electronics Canada Limited**  
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3  
Tel: +1-905-237-2004

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: +44-1628-651-700, Fax: +44-1628-651-804

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China  
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2265-6688, Fax: +852-2886-9022

**Renesas Electronics Taiwan Co., Ltd.**  
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan  
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949  
Tel: +65-6213-0200, Fax: +65-6213-0300

**Renesas Electronics Malaysia Sdn.Bhd.**  
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics India Pvt. Ltd.**  
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India  
Tel: +91-80-67208700, Fax: +91-80-67208777

**Renesas Electronics Korea Co., Ltd.**  
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5338