

SLG4W41403

Vertical Marketing GPIO Expander

General Description

Silego SLG4W41403 is a low power and small form device. The SoC is housed in a 2mm x 3mm STQFN package which is optimal for using with small devices.


Features

- Low Power Consumption
- Pb-Free / RoHS Compliant
- Halogen-Free
- STQFN-20 Package


Output Summary

- 8 Outputs — Push Pull 1X

Pin Configuration

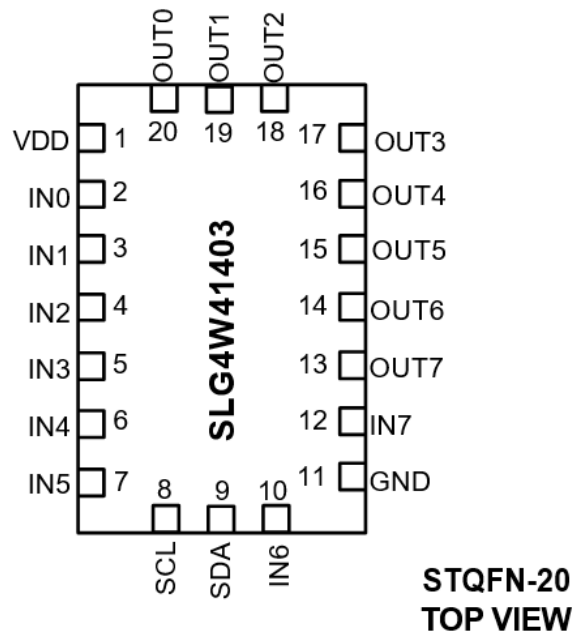

Block Diagram

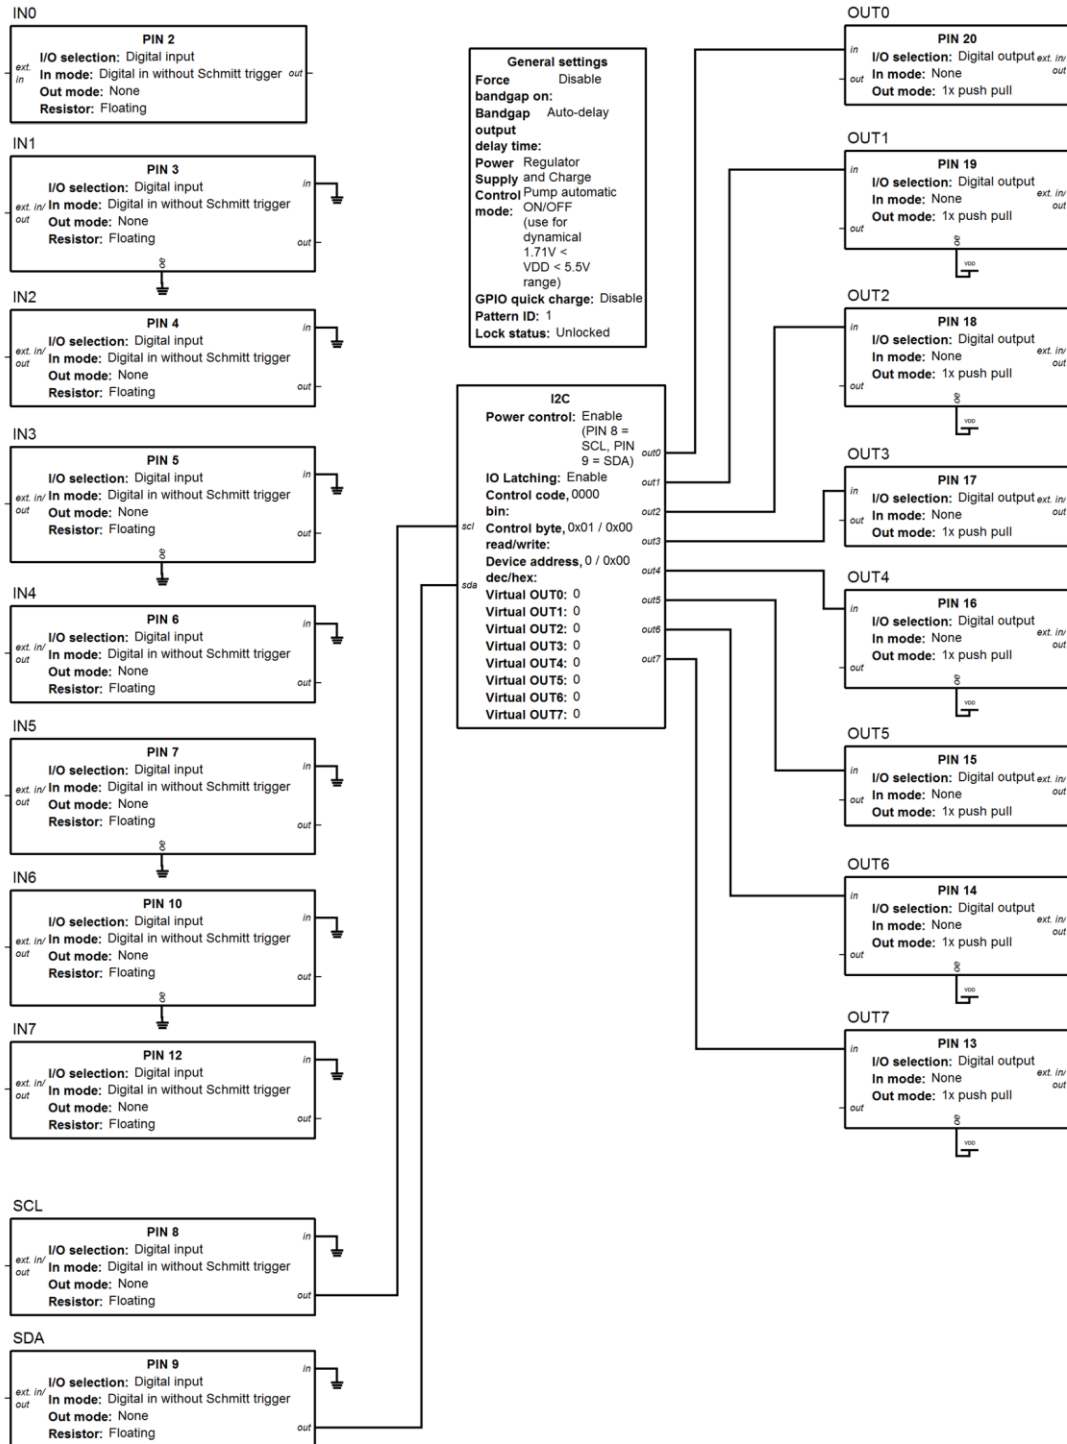

Pin Configuration

Pin #	Pin Name	Type	Pin Description
1	VDD	PWR	Supply Voltage
2	IN0	Digital Input	Digital Input without Schmitt trigger
3	IN1	Digital Input	Digital Input without Schmitt trigger
4	IN2	Digital Input	Digital Input without Schmitt trigger
5	IN3	Digital Input	Digital Input without Schmitt trigger
6	IN4	Digital Input	Digital Input without Schmitt trigger
7	IN5	Digital Input	Digital Input without Schmitt trigger
8	SCL	Digital Input	Digital Input without Schmitt trigger
9	SDA	Digital Input	Digital Input without Schmitt trigger
10	IN6	Digital Input	Digital Input without Schmitt trigger
11	GND	GND	Ground
12	IN7	Digital Input	Digital Input without Schmitt trigger
13	OUT7	Digital Output	Push Pull 1X
14	OUT6	Digital Output	Push Pull 1X
15	OUT5	Digital Output	Push Pull 1X
16	OUT4	Digital Output	Push Pull 1X
17	OUT3	Digital Output	Push Pull 1X
18	OUT2	Digital Output	Push Pull 1X
19	OUT1	Digital Output	Push Pull 1X
20	OUT0	Digital Output	Push Pull 1X

Ordering Information

Part Number	Package Type
SLG4W41403V	V=STQFN-20
SLG4W41403VTR	VTR=STQFN-20 – Tape and Reel (3k units)

Absolute Maximum Conditions

Parameter	Min.	Max.	Unit
V _{HIGH} to GND	-0.3	7	V
Voltage at input pins	-0.3	7	V
Current at input pin	-1.0	1.0	mA
Storage temperature range	-65	125	°C
Junction temperature	--	150	°C
ESD Protection (Human Body Model)	2000	--	V
ESD Protection (Charged Device Model)	1300	--	V
Moisture Sensitivity Level	1		

Electrical Characteristics

(@ 25°C, unless otherwise stated)


Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
V _{DD}	Supply Voltage		2.7	3	3.3	V
T _A	Operating Temperature		-40	25	85	°C
I _Q	Quiescent Current	Static inputs and outputs V _{DD} =5.5V	--	0.95	--	µA
V _O	Maximal Voltage Applied to any PIN in High-Impedance State		--	--	V _{DD}	V
I _O	Maximal Average or DC Current (note 1)	Per Each Chip Side (PIN2-PIN10, PIN12-PIN20)	--	--	90	mA
V _{IH}	HIGH-Level Input Voltage	Logic Input, at V _{DD} =1.8V	1.06	--	V _{DD}	V
		Logic Input, at V _{DD} =3.3V	1.81	--	V _{DD}	
		Logic Input, at V _{DD} =5.0V	2.68	--	V _{DD}	
V _{IL}	LOW-Level Input Voltage	Logic Input, at V _{DD} =1.8V	0	--	0.76	V
		Logic Input, at V _{DD} =3.3V	0	--	1.31	
		Logic Input, at V _{DD} =5.0V	0	--	1.96	
I _{IH}	HIGH-Level Input Current	Logic Input PINs; V _{IN} = V _{DD}	-1.0	--	1.0	µA
I _{IL}	LOW-Level Input Current	Logic Input PINs; V _{IN} = 0V	-1.0	--	1.0	µA
V _{OH}	HIGH-Level Output Voltage	Push Pull & PMOS OD, I _{OH} = 100µA, 1X Driver, at V _{DD} =1.8 V	1.69	1.79	--	V
		Push Pull & PMOS OD, I _{OH} = 3mA, 1X Driver, at V _{DD} =3.3 V	2.70	3.12	--	
		Push Pull & PMOS OD, I _{OH} = 5mA, 1X Driver, at V _{DD} =5.0 V	4.15	4.76	--	
V _{OL}	LOW-Level Output Voltage	Push Pull, I _{OL} = 100µA, 1X Driver, at V _{DD} =1.8 V	--	0.009	0.013	V
		Push Pull, I _{OL} = 3mA, 1X Driver, at V _{DD} =3.3 V	--	0.13	0.23	
		Push Pull, I _{OL} = 5mA, 1X Driver, at V _{DD} =5.0 V	--	0.19	0.24	
I _{OH}	HIGH-Level Output Current	Push Pull & PMOS OD, V _{OH} = V _{DD} -0.2, 1X Driver at V _{DD} =1.8 V	1.07	1.70	--	mA

		Push Pull & PMOS OD, VOH = 2.4 V, 1X Driver, at VDD=3.3 V	6.05	12.08	--	
		Push Pull & PMOS OD, VOH = 2.4 V, 1X Driver, at VDD=5.0 V	22.08	34.04	--	
IOL	LOW-Level Output Current	Push Pull, VOL = 0.15V, 1X Driver, at VDD=1.8 V	0.92	1.69	--	mA
		Push Pull, VOL = 0.4V, 1X Driver, at VDD=3.3 V	4.88	8.24	--	
		Push Pull, VOL = 0.4V, 1X Driver, at VDD=5.0 V	7.22	11.58	--	
TSU	Start up Time	From VDD rising past 1.6 V	--	1	--	ms
FSCL	Clock Frequency, SCL		--	--	400	kHz
tLOW	Clock Pulse Width Low		800	--	--	ns
tHIGH	Clock Pulse Width High		200	--	--	ns
tl	Input Filter Spike Suppression (SCL, SDA)		--	--	168	ns
tAA	Clock Low to Data Out Valid		--	--	900	ns
tBUF	Bus Free Time between Stop and Start		1300	--	--	ns
tHD_ST A	Start Hold Time		448	--	--	ns
tSU_ST A	Start Set-up Time		5.8	--	--	ns
tHD_DA T	Data Hold Time		0	--	--	ns
tSU_DA T	Data Set-up Time		89	--	--	ns
tR	Inputs Rise Time		--	--	300	ns
tF	Inputs Fall Time		--	--	300	ns
tSU_ST D	Stop Set-up Time		9.1	--	--	ns
tDH	Data Out Hold Time		444	--	--	ns
tst_out_d elay	State Machine Output Delay Time		67	--	275	ns
tst_out	State Machine Output Transition Time		--	--	165	ns
tst_pulse	State Machine Input Pulse Acceptance Time		9.2	--	--	ns
tst_comp	State Machine Input Compete Time		--	--	29	ns


Description

This device uses Silego's GreenPAK5 chip (SLG46531V) demonstrates I2C GPIO Expander in GPAK. I2C speed supported by GPAK is 400kHz and can have up to 16 unique addresses (0000b default in current design). IO are set to latch during writing or updating values.

Typical Application Circuit

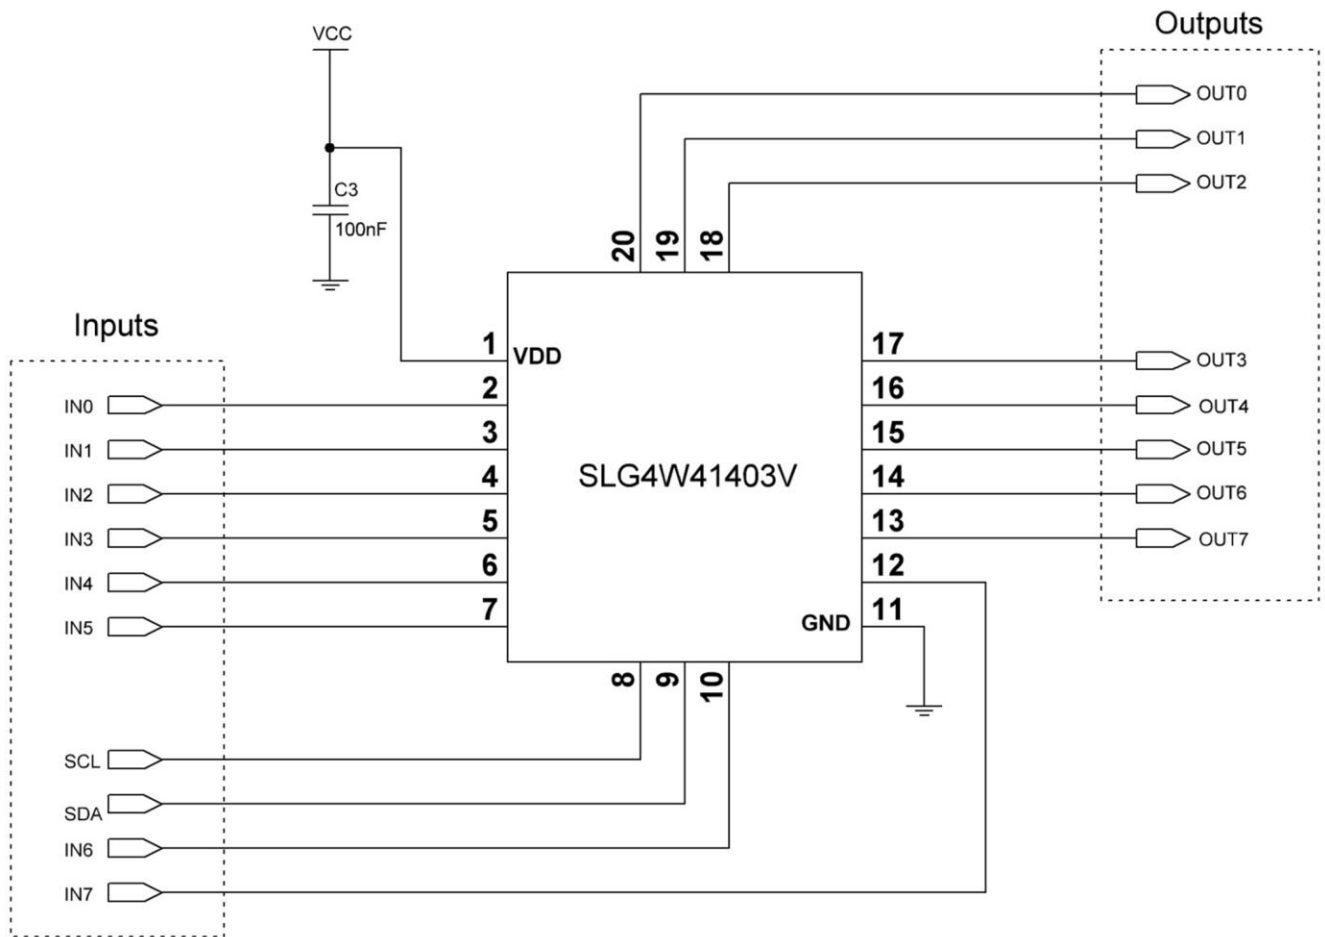

Package Top Marking

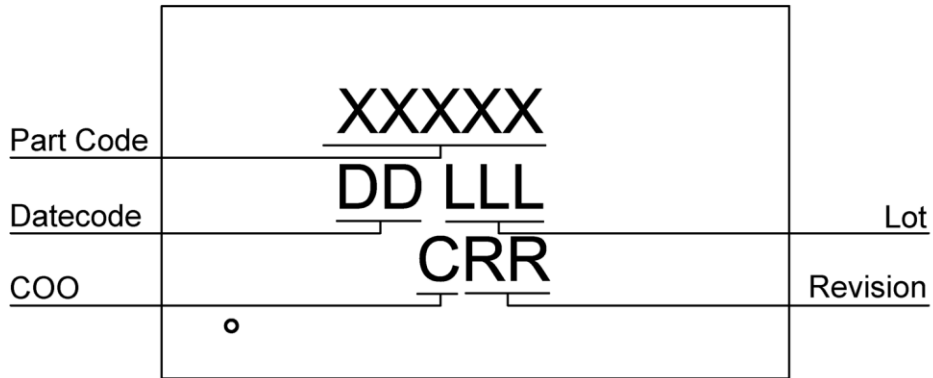


- XXXXX – Part ID Field: identifies the specific device configuration
- DD – Date Code Field: Coded date of manufacture
- LLL – Lot Code: Designates Lot #
- C – Assembly Site/COO: Specifies Assembly Site/Country of Origin
- RR – Revision Code: Device Revision

Datasheet Revision	Programming Code Number	Locked Status	Part Code	Revision	Date
0.10	001	U			09/08/2016

The IC security bit is locked/set for code security for production unless otherwise specified. Revisionnumber is not changed for bit locking.

Package Drawing and Dimensions

20 Lead STQFN Package
 JEDEC MO-220, Variation WECE
 IC Net Weight: 0.0090 g

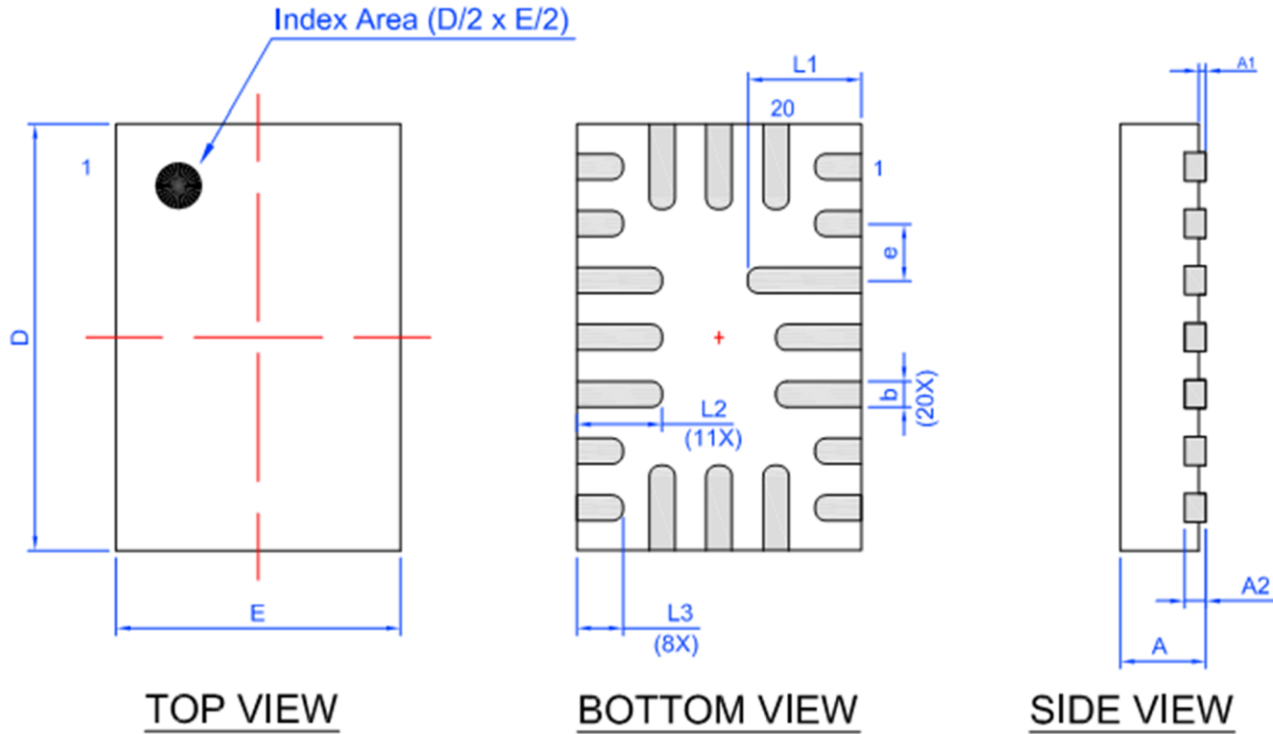

Unit: mm

Symbol	Min	Nom.	Max	Symbol	Min	Nom.	Max
A	0.50	0.55	0.60	D	2.95	3.00	3.05
A1	0.005	-	0.050	E	1.95	2.00	2.05
A2	0.10	0.15	0.20	L1	0.75	0.80	0.85
b	0.13	0.18	0.23	L2	0.55	0.60	0.65
e	0.40 BSC			L3	0.275	0.325	0.375


Tape and Reel Specification

Package Type	# of Pins	Nominal Package Size (mm)	Max Units		Reel & Hub Size (mm)	Trailer A		Leader B		Pocket (mm)	
			per reel	per box		Pockets	Length (mm)	Pockets	Length (mm)	Width	Pitch
STQFN 20L 2x3mm 0.4P Green	20	2x3x0.55	3000	3000	178/60	100	400	100	400	8	4

Carrier Tape Drawing and Dimensions

Package Type	Pocket BTM Length (mm)	Pocket BTM Width (mm)	Pocket Depth (mm)	Index Hole Pitch (mm)	Pocket Pitch (mm)	Index Hole Diameter (mm)	Index Hole to Tape Edge (mm)	Index Hole to Pocket Center (mm)	Tape Width (mm)
	A0	B0	K0	P0	P1	D0	E	F	W
STQFN 20L 2x3mm 0.4P Green	2.2	3.15	0.76	4	4	1.5	1.75	3.5	8

Refer to EIA-481 Specifications

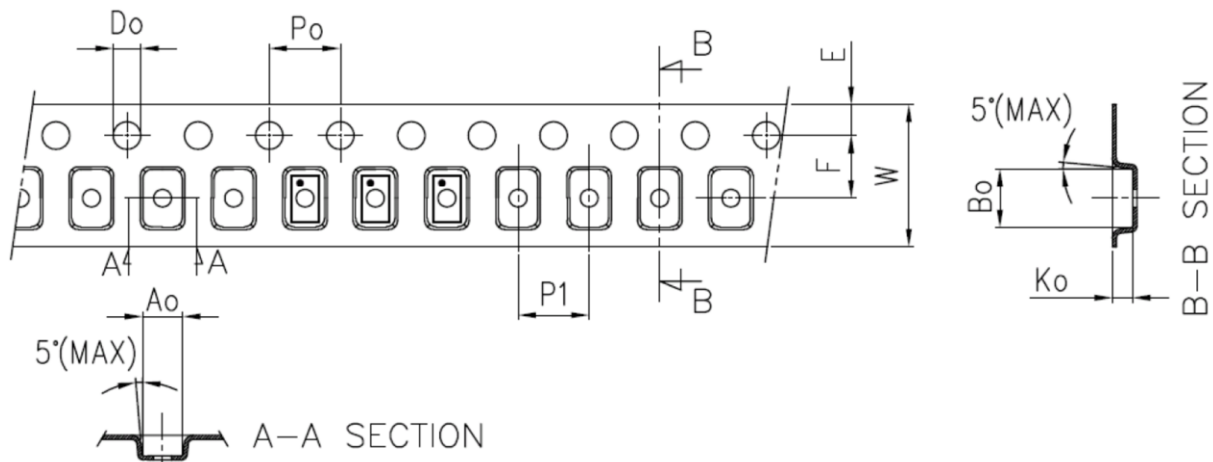

Recommended Reflow Soldering Profile

Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 3.3 mm³ (nominal). More information can be found at www.jedec.org.

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01 Jan 2024)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit www.renesas.com/contact-us/.