




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	11/03/11	CK
01	CHANGE PACKAGE THICKNESS DIM	08/23/12	CK
02	ADD NOMINAL AND MAXIMUM VALUE FOR b1 COMBINE POD & LAND PATTERN	10/31/13	CK
03	REMOVE NUMBER OF LAYER IN TITLE BLOCK	10/12/15	CK

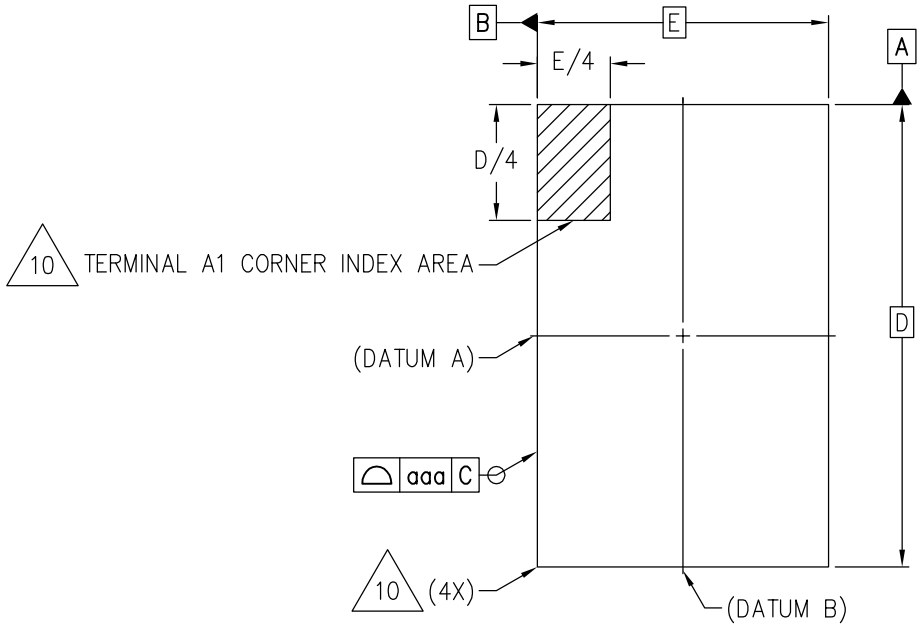


TOP VIEW

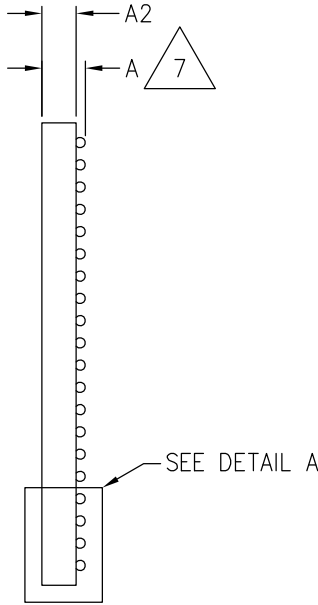


SIDE VIEW

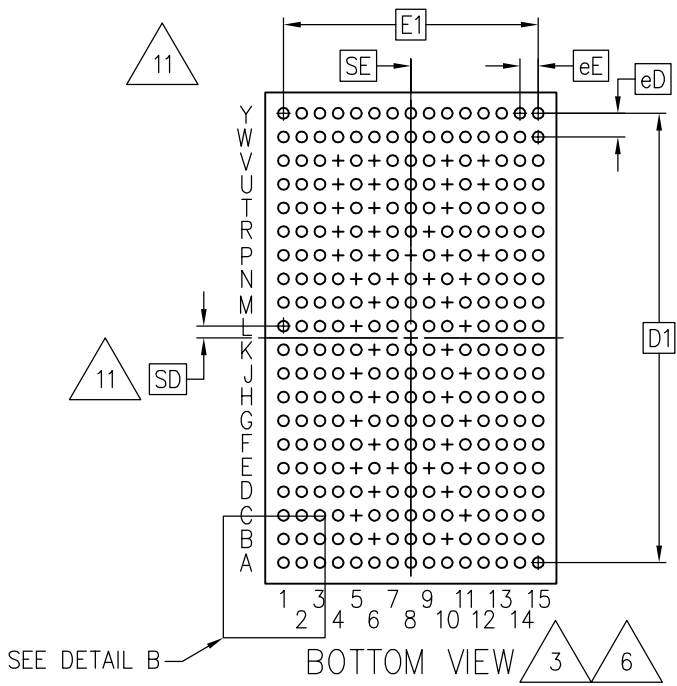


BOTTOM VIEW

TOLERANCES UNLESS SPECIFIED		 <b>6024 Silver Creek Valley Rd</b> San Jose, CA 95138 PHONE: (408) 284-8200 www.IDT.com FAX: (408) 284-2775	TITLE AT/ATC253 8.00 X 13.50 mm BODY DUAL PITCH (0.50MM X 0.65MM) FCCSP
DECIMAL	ANGULAR		
XX±.1	±		
XXX±.05			
XXXX±.030			
APPROVALS	DATE	SIZE	DRAWING No.
DRAWN <i>CXC</i>	11/03/11	C	PSC-4395
CHECKED			REV
			03
DO NOT SCALE DRAWING			SHEET 1 OF 6

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	11/03/11	CK
01	CHANGE PACKAGE THICKNESS DIM	08/23/12	CK
02	ADD NOMINAL AND MAXIMUM VALUE FOR b1 COMBINE PAD & LAND PATTERN	10/31/13	CK
03	REMOVE NUMBER OF LAYER IN TITLE BLOCK	10/12/15	CK

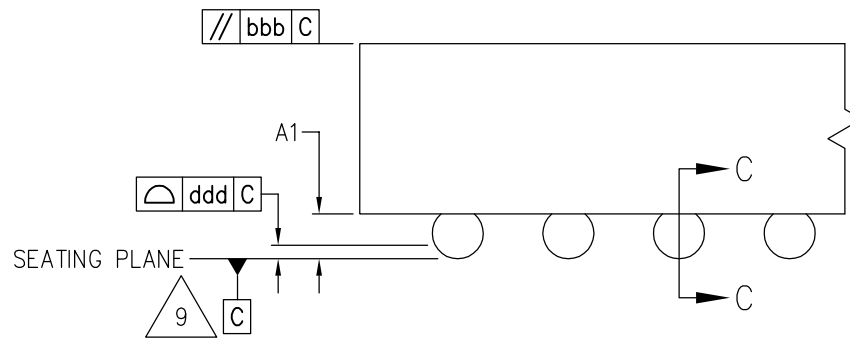


DETAIL A  
(ROTATED 90° CW)

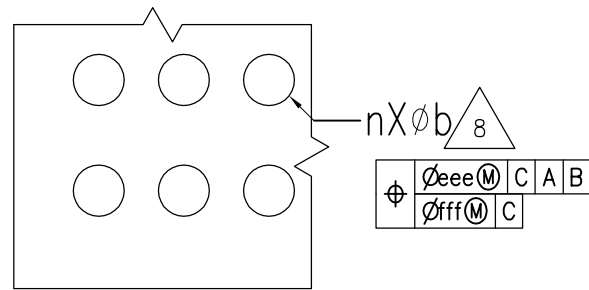


DETAIL B

TYPE 1 – SMD  
(SOLDER MASK DEFINED)



TYPE 2 – NSMD  
(NON SOLDER MASK DEFINED)



SECTION C-C

TOLERANCES UNLESS SPECIFIED	
DECIMAL	ANGULAR
XX±.1	±
XXX±.05	
XXXX±.030	
APPROVALS	DATE
DRAWN <i>CK</i>	11/03/11
CHECKED	

**IDT™** 6024 Silver Creek Valley Rd  
San Jose, CA 95138  
PHONE: (408) 284-8200  
**www.IDT.com** FAX: (408) 284-2775


TITLE AT/ATG253 8.00 X 13.50 mm BODY DUAL PITCH (0.50MM X 0.65MM) FCCSP	
SIZE <b>C</b>	DRAWING No. PSC-4395
REV 03	
DO NOT SCALE DRAWING	
SHEET 2 OF 6	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	11/03/11	CK
01	CHANGE PACKAGE THICKNESS DIM	08/23/12	CK
02	ADD NOMINAL AND MAXIMUM VALUE FOR b1 COMBINE POD & LAND PATTERN	10/31/13	CK
03	REMOVE NUMBER OF LAYER IN TITLE BLOCK	10/12/15	CK


TABLE 1				
COMMON DIMENSIONS				
SYMBOL	L: LOW PROFILE			NOTES
	MIN	NOM	MAX	
A	1.24	1.32	1.40	7
A1	0.19	0.24	0.29	7
A2	1.02	1.08	1.15	
b	0.25	0.30	0.35	
b1	TYPE1	0.225	0.275	0.325
	TYPE2	0.20	-	-
eD	0.65 BSC			4
eE	0.50 BSC			4
NOTES	1, 2			
REF	11-856			
ISSUE	A			

TABLE 2		
RECTANGULAR VARIATIONS		
VARIATION ► SYMBOL ▼	AA	NOTES
D BSC	13.50	2
E BSC	8.00	2
D1 BSC	12.35	2
E1 BSC	7.00	2
MD	20	
ME	15	
SD BSC	0.325	2
SE BSC	0.00	2
n	253	12
N	300	5
FOOTPRINT	1	12
NOTES	1	
REF	11-856	
ISSUE	A	

TABLE 3	
TOLERANCE OF FORM AND POSITION	
SYMBOL	VALUE
aaa	0.15
bbb	0.20
ddd	0.08
eee	0.15
fff	0.05
NOTES	1, 2
REF	11-856
ISSUE	A


TOLERANCES UNLESS SPECIFIED		 <b>6024 Silver Creek Valley Rd</b> <b>San Jose, CA 95138</b> <b>PHONE: (408) 284-8200</b> <b>www.IDT.com FAX: (408) 284-2775</b>
DECIMAL	ANGULAR	
XX±.1	±	
XXX±.05		
XXXX±.030		
APPROVALS	DATE	TITLE
DRAWN <i>CK</i>	11/03/11	AT/ATG253 8.00 X 13.50 mm BODY DUAL PITCH (0.50MM X 0.65MM) FCCSP
CHECKED		
		SIZE
		DRAWING No.
		<b>C</b>
		<b>PSC-4395</b>
		REV
		<b>03</b>
DO NOT SCALE DRAWING		SHEET 3 OF 6

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	11/03/11	CK
01	CHANGE PACKAGE THICKNESS DIM	08/23/12	CK
02	ADD NOMINAL AND MAXIMUM VALUE FOR b1 COMBINE POD & LAND PATTERN	10/31/13	CK
03	REMOVE NUMBER OF LAYER IN TITLE BLOCK	10/12/15	CK

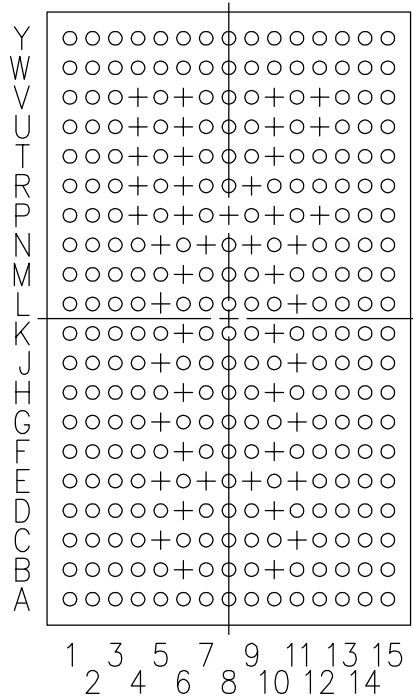

FOOTPRINT 1 


+ = DEPOPULATED BALL POSITIONS

TOLERANCES UNLESS SPECIFIED		 <b>6024 Silver Creek Valley Rd</b> <b>San Jose, CA 95138</b> <b>PHONE: (408) 284-8200</b> <b>www.IDT.com FAX: (408) 284-2775</b>	
DECIMAL	ANGULAR		
XX±.1	±		
XXX±.05			
XXXX±.030			
APPROVALS	DATE	TITLE	
DRAWN <i>CK</i>	11/03/11	AT/ATG253 8.00 X 13.50 mm BODY DUAL PITCH (0.50MM X 0.65MM) FCCSP	
CHECKED		SIZE	REV
		C	03
		DRAWING No.	
		PSC-4395	
DO NOT SCALE DRAWING			SHEET 4 OF 6


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
- 3 SOLDER BALL POSITION DESIGNATOR PER JEP95, SECTION 3, SPP-020.
4. 'eD' AND 'eE' REPRESENT THE SOLDER BALL GRID PITCH CORRESPONDING TO THE D AND E DIRECTIONS RESPECTIVELY.
5. N REPRESENTS THE MAXIMUM NUMBER OF SOLDER BALLS FOR MATRIX SIZES MD, ME.
- 6 A FULLY POPULATED 16 X 20 MATRIX SIZE IS SHOWN FOR ILLUSTRATION ONLY.
- 7 DIMENSION "A" INCLUDES STANDOFF HEIGHT "A1", PACKAGE BODY THICKNESS AND LID HEIGHT, BUT DOES NOT INCLUDE ATTACHED FEATURES, e.g. EXTERNAL HEAT SINK. AN INTEGRAL HEAT SLUG IS NOT CONSIDERED AN ATTACHED FEATURE.
- 8 DIMENSION "b" IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER PARALLEL TO PRIMARY DATUM C.
- 9 PRIMARY DATUM C (SEATING PLANE) IS DEFINED BY THE PLANE ESTABLISHED BY THE CONTACT POINTS OF THREE OR MORE SOLDER BALLS THAT SUPPORT THE DEVICE WHEN IT IS PLACED ON TOP OF A PLANAR SURFACE.
- 10 THE CORNER A1 MUST BE IDENTIFIED ON BOTH THE BOTTOM AND TOP SIDES OF THE PACKAGE, THE IDENTIFICATION FEATURE CAN BE MADE USING INK OR METALIZED MARKINGS, IDENTATIONS, OR OTHER FEATURES. THE EXACT SHAPE OF EACH CORNER IS OPTIONAL.
- 11 DIMENSIONS 'SD' AND 'SE' ARE MEASURED WITH RESPECT TO DATUM A AND DATUM B AND DEFINE THE POSITION OF THE CENTER SOLDER BALL IN THE OUTER ROW. WHEN THERE IS AN ODD NUMBER OF SOLDER BALLS IN THE OUTER ROW 'SD' OR 'SE' = 0 WHEN THERE IS AN EVEN NUMBER OF SOLDER BALLS IN THE OUTER ROW, 'SD' = eD/2 AND 'SE' = eE/2.
- 12 SOLDER BALL DEPOPULATION IS ALLOWED. DEPOPULATION IS THE OMISSION OF SOLDER BALLS FROM A FULL MATRIX (MD, ME).
- 13 SOLDERABLE SURFACE MAY BE DEFINED BY AN OPENING IN THE SOLDER RESIST LAYER (TYPE 1) OR BY THE SIZE OF A METALIZED PAD (TYPE 2). IT MAY BE ELLIPTICAL PROVIDED THE RATIO OF MAJOR TO MINOR AXES IS NO GREATER THAN 2/1 AND THE SURFACE AREA IS NO LESS THAN THE MINIMUM FOR A CIRCULAR PAD. FOR TYPE 2 DESIGNS, EXPOSED COPPER TRACES ARE PERMITTED OUTSIDE THE b1 PAD AREA.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	11/03/11	CK
01	CHANGE PACKAGE THICKNESS DIM	08/23/12	CK
02	ADD NOMINAL AND MAXIMUM VALUE FOR b1 COMBINE PAD & LAND PATTERN	10/31/13	CK
03	REMOVE NUMBER OF LAYER IN TITLE BLOCK	10/12/15	CK

TOLERANCES UNLESS SPECIFIED		 <b>6024 Silver Creek Valley Rd</b> San Jose, CA 95138 PHONE: (408) 284-8200 FAX: (408) 284-2775 <a href="http://www.IDT.com">www.IDT.com</a>	
DECIMAL	ANGULAR	TITLE AT/ATG253 8.00 X 13.50 mm BODY	
XX±.1	±	DUAL PITCH (0.50MM X 0.65MM)	
XXX±.05		FCCSP	
XXXX±.030		APPROVALS	DATE
		DRAWN <i>CK</i>	11/03/11
CHECKED		SIZE	DRAWING No.
		C	PSC-4395
		REV	03
DO NOT SCALE DRAWING			SHEET 5 OF 6


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
00	INITIAL RELEASE	11/03/11	CK
01	CHANGE PACKAGE THICKNESS DIM	08/23/12	CK
02	ADD NOMINAL AND MAXIMUM VALUE FOR b1 COMBINE POD & LAND PATTERN	10/31/13	CK
03	REMOVE NUMBER OF LAYER IN TITLE BLOCK	10/12/15	CK

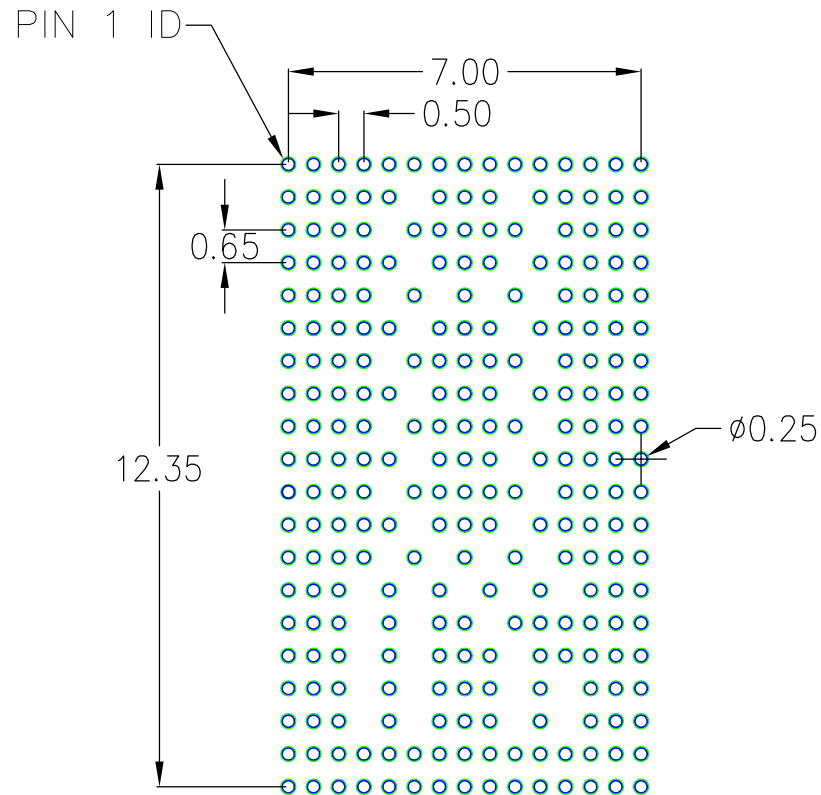

### RECOMMENDED LAND PATTERN DIMENSION

#### NOTES:

1. ALL DIMENSION ARE IN mm. ANGLES IN DEGREES.
2. TOP DOWN VIEW. AS VIEWED ON PCB.
3. COMPONENT OUTLINE SHOW FOR REFERENCE IN GREEN.
4. LAND PATTERN IN BLUE. NSMD PATTERN ASSUMED.
5. LAND PATTERN RECOMMENDATION PER IPC-7351B GENERIC REQUIREMENT FOR SURFACE MOUNT DESIGN AND LAND PATTERN.

TOLERANCES UNLESS SPECIFIED		 <b>6024 Silver Creek Valley Rd</b> <b>San Jose, CA 95138</b> <b>PHONE: (408) 284-8200</b> <b>www.IDT.com FAX: (408) 284-2775</b>	
DECIMAL	ANGULAR		
XX±.1	±		
XXX±.05			
XXXX±.030			
APPROVALS	DATE	TITLE AT/ATG253 8.00 X 13.50 mm BODY	
DRAWN <i>CK</i>	11/03/11	DUAL PITCH (0.50MM X 0.65MM)	
CHECKED		FCCSP	
		SIZE	REV
		C	03
		DRAWING No. PSC-4395	
		DO NOT SCALE DRAWING	SHEET 6 OF 6