

## Broadcom OneSync Performance, ITU-T G.8273.2 BC and G.8273.4 PTS Slave Clock

This report contains the 1588 performance data for the Broadcom OneSync device. The presented results include a subset of Boundary Clock (BC) results for ITU-T G.8273.2 Full Time support, and a subset of Slave Clock (SC) results for ITU-T G.8273.4 Partial Time Support (PTS). The Renesas 1588 servo was used for all performance tests.

### Contents

|  |           |
|--|-----------|
| <b>1. Results Summary .....</b>                              | <b>4</b>  |
| <b>2. Test Configuration.....</b>                            | <b>5</b>  |
| <b>3. G.8273.2: Noise Generation – 1PPS.....</b>             | <b>6</b>  |
| 3.1 ONEPPS Analysis .....                                    | 7         |
| 3.2 FILTEREDTIMEERROR Analysis .....                         | 8         |
| 3.3 CTE Analysis .....                                       | 9         |
| 3.4 DTE Analysis .....                                       | 10        |
| 3.5 DTEHF Analysis .....                                     | 11        |
| 3.6 DTEMTIE Analysis .....                                   | 12        |
| 3.7 DTETDEV Analysis.....                                    | 13        |
| <b>4. G.8273.2: Noise Generation – PTP .....</b>             | <b>14</b> |
| 4.1 TIMEERROR Analysis.....                                  | 15        |
| 4.2 FILTEREDTIMEERROR Analysis .....                         | 16        |
| 4.3 CTE Analysis .....                                       | 17        |
| 4.4 DTE Analysis .....                                       | 18        |
| 4.5 DTEHF Analysis .....                                     | 19        |
| 4.6 DTEMTIE Analysis .....                                   | 20        |
| 4.7 DTETDEV Analysis.....                                    | 21        |
| <b>5. G.8273.2: Noise Generation – No SyncE – 1PPS .....</b> | <b>22</b> |
| 5.1 ONEPPS Analysis .....                                    | 23        |
| 5.2 FILTEREDTIMEERROR Analysis .....                         | 24        |
| 5.3 CTE Analysis .....                                       | 25        |
| 5.4 DTE Analysis .....                                       | 26        |
| 5.5 DTEHF Analysis .....                                     | 27        |
| 5.6 DTEMTIE Analysis .....                                   | 28        |
| 5.7 DTETDEV Analysis.....                                    | 29        |
| <b>6. G.8273.2: Noise Generation – No SyncE – PTP .....</b>  | <b>30</b> |
| 6.1 TIMEERROR Analysis.....                                  | 31        |
| 6.2 FILTEREDTIMEERROR Analysis .....                         | 32        |
| 6.3 CTE Analysis .....                                       | 33        |
| 6.4 DTE Analysis .....                                       | 34        |
| 6.5 DTEHF Analysis .....                                     | 35        |
| 6.6 DTEMTIE Analysis .....                                   | 36        |
| 6.7 DTETDEV Analysis.....                                    | 37        |

|            |   |           |
|------------|---|-----------|
| <b>7.</b>  | <b>G.8273.2: Holdover – 1PPS</b> .....                      | <b>38</b> |
| 7.1        | ONEPPS Analysis .....                                       | 39        |
| 7.2        | MTIE Analysis.....  | 40        |
| <b>8.</b>  | <b>G.8273.2: Holdover – PTP</b> .....                       | <b>41</b> |
| 8.1        | TIMEERROR Analysis.....                                     | 42        |
| 8.2        | DTE Analysis .....  | 43        |
| 8.3        | DTEMTIE Analysis .....                                      | 44        |
| <b>9.</b>  | <b>G.8273.2: Holdover – No SyncE – 1PPS</b> .....           | <b>45</b> |
| 9.1        | ONEPPS Analysis .....                                       | 46        |
| 9.2        | MTIE Analysis.....  | 47        |
| <b>10.</b> | <b>G.8273.2: Holdover – No SyncE – PTP</b> .....            | <b>48</b> |
| 10.1       | TIMEERROR Analysis.....                                     | 49        |
| 10.2       | DTE Analysis .....  | 50        |
| 10.3       | DTEMTIE Analysis .....                                      | 51        |
| <b>11.</b> | <b>G.8273.2: PTP to 1PPS Noise Transfer</b> .....           | <b>52</b> |
| 11.1       | ONEPPS Analysis .....                                       | 53        |
| 11.2       | PTPNoiseTransfer Analysis.....                              | 54        |
| <b>12.</b> | <b>G.8273.2: PTP to PTP Noise Transfer</b> .....            | <b>55</b> |
| 12.1       | TIMEERROR Analysis.....                                     | 56        |
| 12.2       | PTPNoiseTransfer Analysis.....                              | 57        |
| <b>13.</b> | <b>G.8273.2: SyncE to 1PPS Noise Transfer</b> .....         | <b>58</b> |
| 13.1       | ONEPPS Analysis .....                                       | 59        |
| 13.2       | SyncENoiseTransfer Analysis .....                           | 60        |
| <b>14.</b> | <b>G.8273.2: SyncE to PTP Noise Transfer</b> .....          | <b>61</b> |
| 14.1       | ONEPPS Analysis .....                                       | 62        |
| 14.2       | SyncENoiseTransfer Analysis .....                           | 63        |
| <b>15.</b> | <b>G.8273.2: Noise Tolerance – 1PPS</b> .....               | <b>64</b> |
| 15.1       | ONEPPS Analysis .....                                       | 65        |
| <b>16.</b> | <b>G.8273.2: Noise Tolerance – PTP</b> .....                | <b>66</b> |
| 16.1       | TIMEERROR Analysis.....                                     | 67        |
| <b>17.</b> | <b>G.8273.4 PTS: Noise Generation</b> .....                 | <b>68</b> |
| 17.1       | ONEPPS Analysis .....                                       | 69        |
| 17.2       | CTE Analysis .....  | 70        |
| 17.3       | DTE Analysis .....  | 71        |
| 17.4       | DTEHF Analysis .....  | 72        |
| <b>18.</b> | <b>G.8273.4 PTS: Holdover</b> .....                         | <b>73</b> |
| 18.1       | TIE Analysis.....   | 74        |
| <b>19.</b> | <b>G.8261: Test Case 15 – Network Traffic Model B</b> ..... | <b>75</b> |
| 19.1       | ONEPPS Analysis .....                                       | 76        |
| 19.2       | MTIE Analysis.....  | 77        |
| 19.3       | TDEV Analysis.....  | 78        |
| <b>20.</b> | <b>G.8261: Test Case 16 – Network Traffic Model B</b> ..... | <b>79</b> |

|            |   |           |
|------------|---|-----------|
| 20.1       | ONEPPS Analysis .....                   | 80        |
| 20.2       | MTIE Analysis.....                      | 81        |
| <b>21.</b> | <b>TDEV Analysis .....</b>              | <b>82</b> |
| <b>22.</b> | <b>Configuration Files.....</b>         | <b>83</b> |
| 22.1       | PCM4L Json Files .....                  | 83        |
| 22.1.1     | G.8273.4 PTS.....                       | 83        |
| 22.1.2     | G.8273.2 FTS.....                       | 86        |
| 22.2       | PTP4L Config Files.....                 | 88        |
| 22.2.1     | G.8275.2 Unicast Slave Clock.....       | 88        |
| 22.2.2     | G.8275.1 Multicast Boundary Clock ..... | 89        |
| 22.3       | TCS/Bin Files.....                      | 90        |
| <b>23.</b> | <b>Revision History .....</b>           | <b>90</b> |

## 1. Results Summary

| Standard     | Test Case                              | Results |
|--------------|--|---------|
| G.8273.2     | Noise Generation – 1PPS                | Pass    |
| G.8273.2     | Noise Generation – PTP                 | Pass    |
| G.8273.2     | Noise Generation – No SyncE – 1PPS     | Pass    |
| G.8273.2     | Noise Generation – No SyncE – PTP      | Pass    |
| G.8273.2     | Holdover – 1PPS                        | Pass    |
| G.8273.2     | Holdover – PTP                         | Pass    |
| G.8273.2     | Holdover – No SyncE – 1PPS             | Pass    |
| G.8273.2     | Holdover – No SyncE - PTP              | Pass    |
| G.8273.2     | PTP to 1PPS Noise Transfer             | Pass    |
| G.8273.2     | PTP to PTP Noise Transfer              | Pass    |
| G.8273.2     | SyncE to 1PPS Noise Transfer           | Pass    |
| G.8273.2     | SyncE to PTP Noise Transfer            | Pass    |
| G.8273.2     | Noise Tolerance – 1PPS                 | Pass    |
| G.8273.2     | Noise Tolerance – PTP                  | Pass    |
| G.8273.4 PTS | Noise Generation                       | Pass    |
| G.8273.4 PTS | Holdover                               | Pass    |
| G.8261       | Test Case 15 - Network Traffic Model B | Pass    |
| G.8261       | Test Case 16 - Network Traffic Model B | Pass    |

## 2. Test Configuration

|                                 |                                     |
|---------------------------------|-------------------------------------|
| <b>Device Under Test</b>        | Broadcom OneSync                    |
| <b>Oscillator</b>               | STP3384LF                           |
| <b>1pps Source</b>              | Symmetricom TP5000                  |
| <b>Software Version</b>         | Pipeline 151653 (Master Branch 4.3) |
| <b>Instrument</b>               | Paragon Neo                         |
| <b>Instrument Serial Number</b> | 00036081                            |
| <b>Ethernet Interface</b>       | Optical                             |
| <b>CAT Version</b>              | 28.10.22111.2025 [S] (C)            |

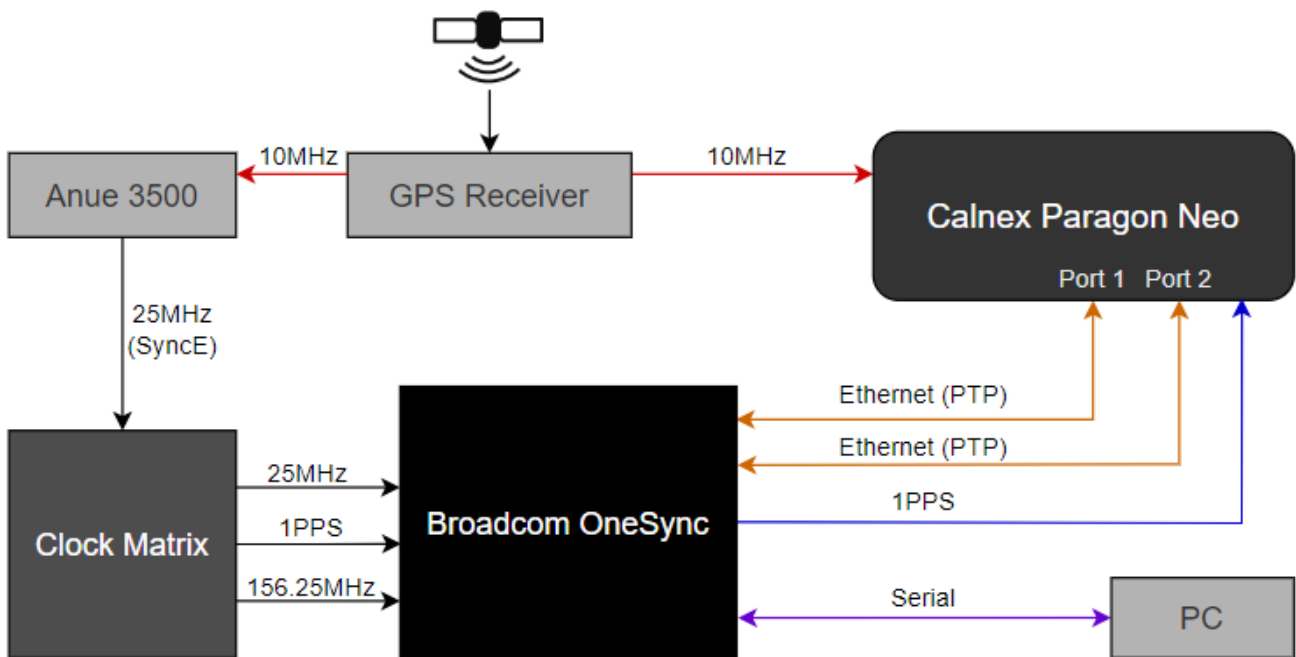


Figure 1. Equipment Configuration


### 3. G.8273.2: Noise Generation – 1PPS

|                               |                       |
|-------------------------------|-----------------------|
| <b>Test Description</b>       | Noise Generation 1PPS |
| <b>Report Date</b>            | 23-02-13_08-16-51     |
| <b>Packet Rate (pkt/s)</b>    | 16                    |
| <b>Beginning of Test</b>      | 2023-02-07 5:49:51 PM |
| <b>Test Duration</b>          | 02:46:40              |
| <b>Time to Phase Lock (s)</b> | 18                    |

|                                      |   |
|--------------------------------------|---|
| <b>All Mask Results</b>              | <b>Pass</b>   |
| <b>Mask ONEPPS</b>                   | 0.03μs  |
| <b>Mask ONEPPS Result</b>            | <b>Pass</b>   |
| <b>Mask FILTEREDTIMEERROR</b>        | 0.005μs   |
| <b>Mask FILTEREDTIMEERROR Result</b> | <b>Pass</b>   |
| <b>Mask CTE</b>                      | 0.01μs  |
| <b>Mask CTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTE</b>                      | 0.01μs  |
| <b>Mask DTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTEHF</b>                    | 0.07μs  |
| <b>Mask DTEHF Result</b>             | <b>Pass</b>   |
| <b>Mask DTEMTIE</b>                  | G.8273.2 T-BC Provisional Class D Dynamic<br>TE LF Const. Temp. |
| <b>Mask DTEMTIE Result</b>           | <b>Pass</b>   |
| <b>Mask DTETDEV</b>                  | G.8273.2 T-BC Provisional Class D Dynamic<br>TE LF Const. Temp. |
| <b>Mask DTETDEV Result</b>           | <b>Pass</b>   |


### 3.1 ONEPPS Analysis

|                        |          |
|------------------------|----------|
| Offset Removal Applied | Off      |
| Zero Offset            | -3.513ns |

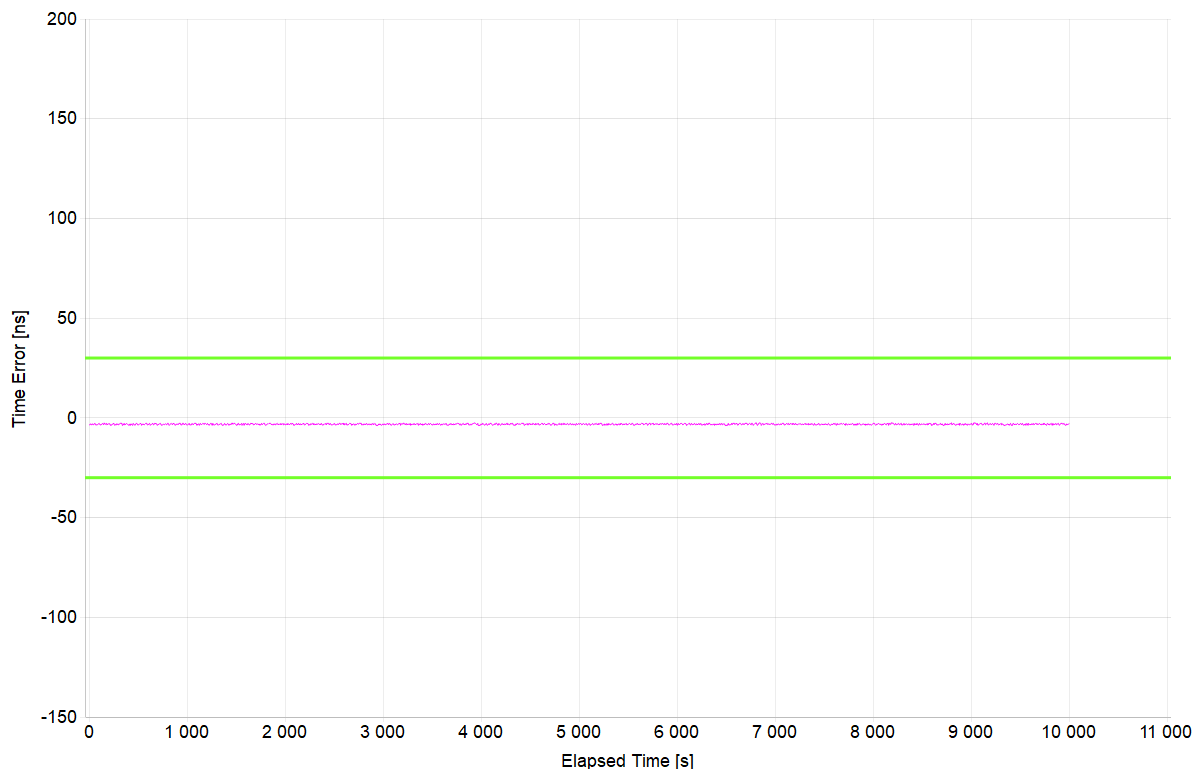

|              |        |
|--------------|--------|
| Mean [ns]    | -3.183 |
| Min [ns]     | -3.763 |
| Max [ns]     | -2.513 |
| Max-Min [ns] | 1.25   |

### 3.2 FILTEREDTIMEERROR Analysis

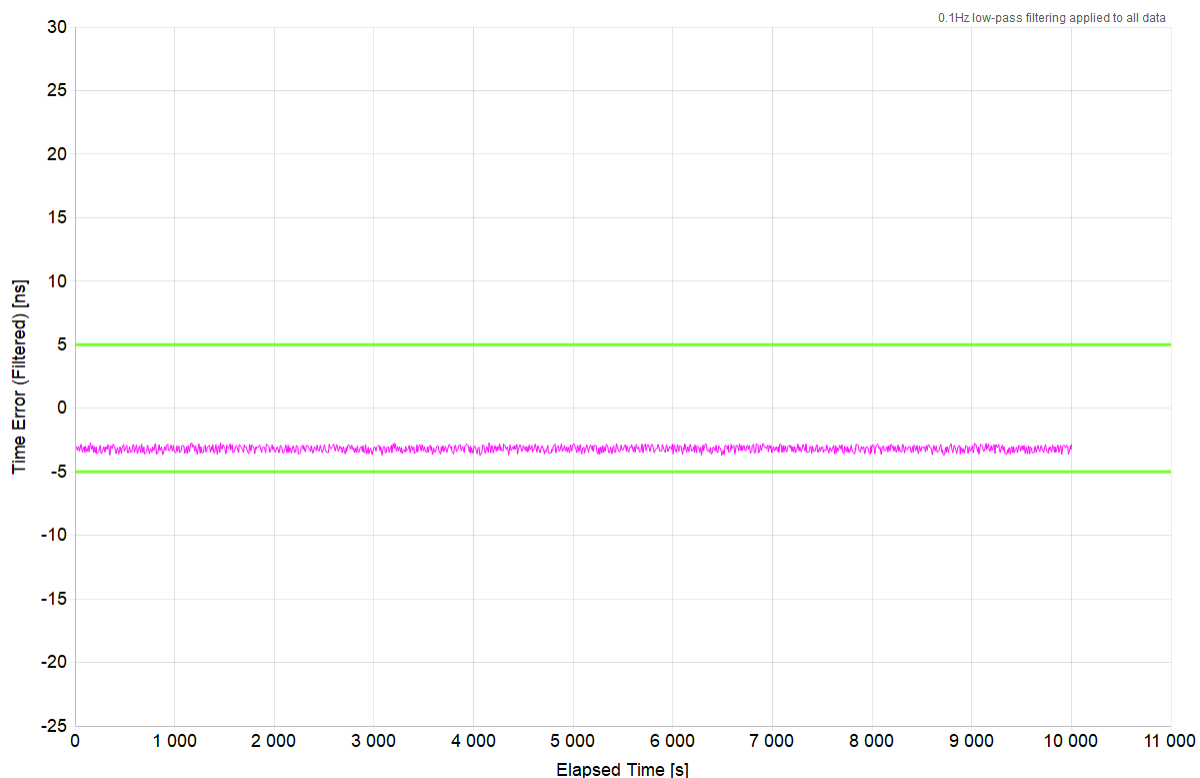


|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | -3.183 |
| <b>Min [ns]</b>     | -3.718 |
| <b>Max [ns]</b>     | -2.72  |
| <b>Max-Min [ns]</b> | 0.998  |




### 3.3 CTE Analysis

|                           |      |
|---------------------------|------|
| <b>Averaging Time (s)</b> | 1000 |
|---------------------------|------|

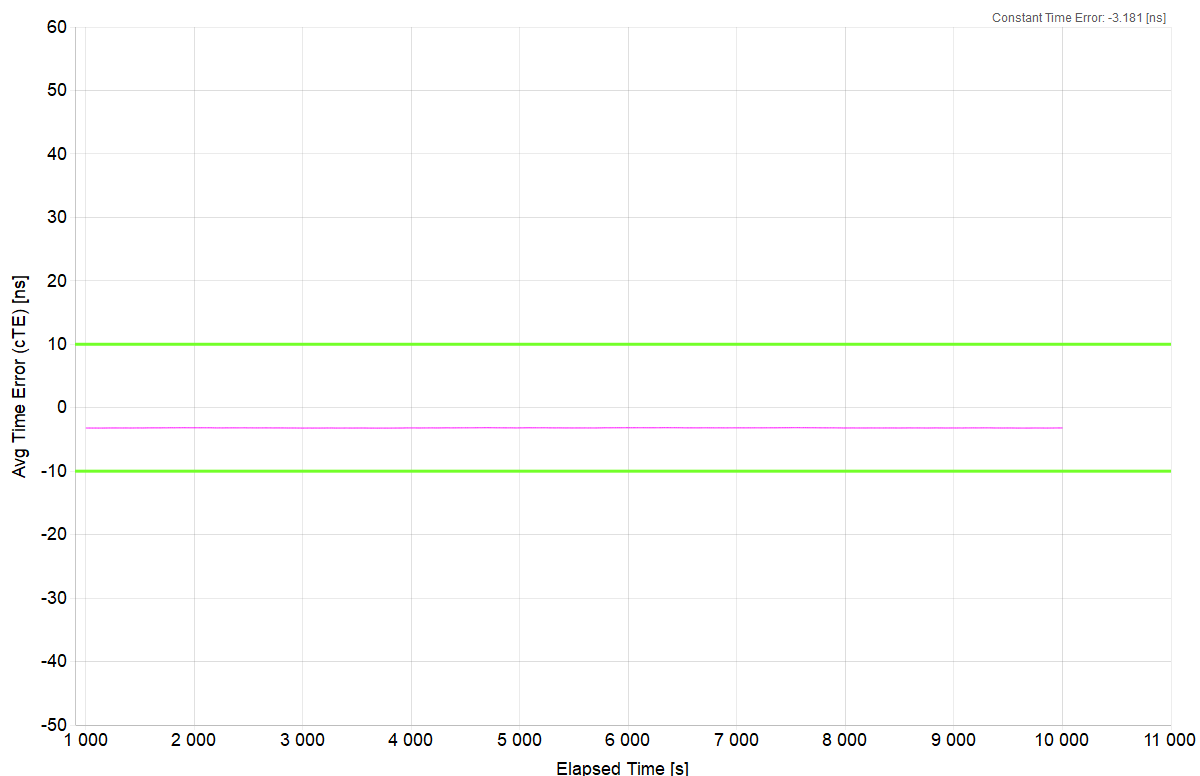


|                                 |        |
|---------------------------------|--------|
| <b>Constant Time Error [ns]</b> | -3.181 |
| <b>Min [ns]</b>                 | -3.213 |
| <b>Max [ns]</b>                 | -3.147 |
| <b>Max-Min [ns]</b>             | 0.067  |

### 3.4 DTE Analysis

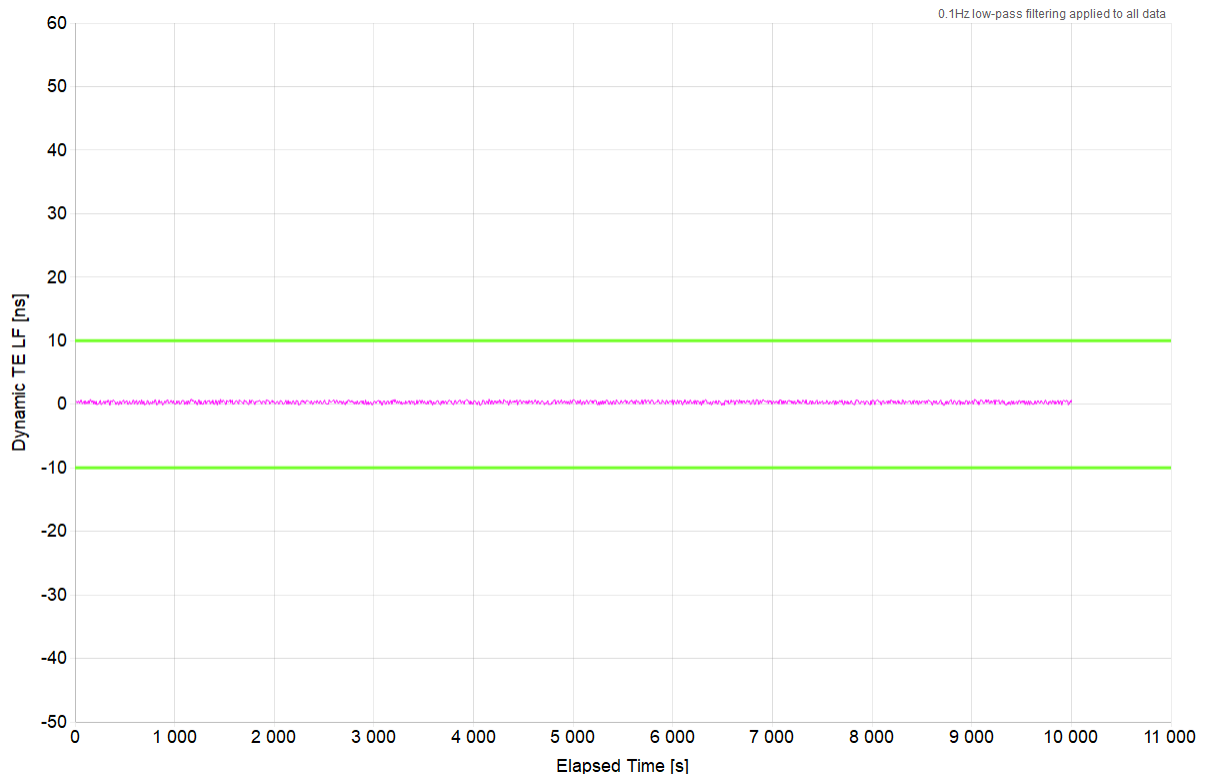


|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 0.33   |
| <b>Min [ns]</b>     | -0.205 |
| <b>Max [ns]</b>     | 0.793  |
| <b>Max-Min [ns]</b> | 0.998  |

### 3.5 DTEHF Analysis

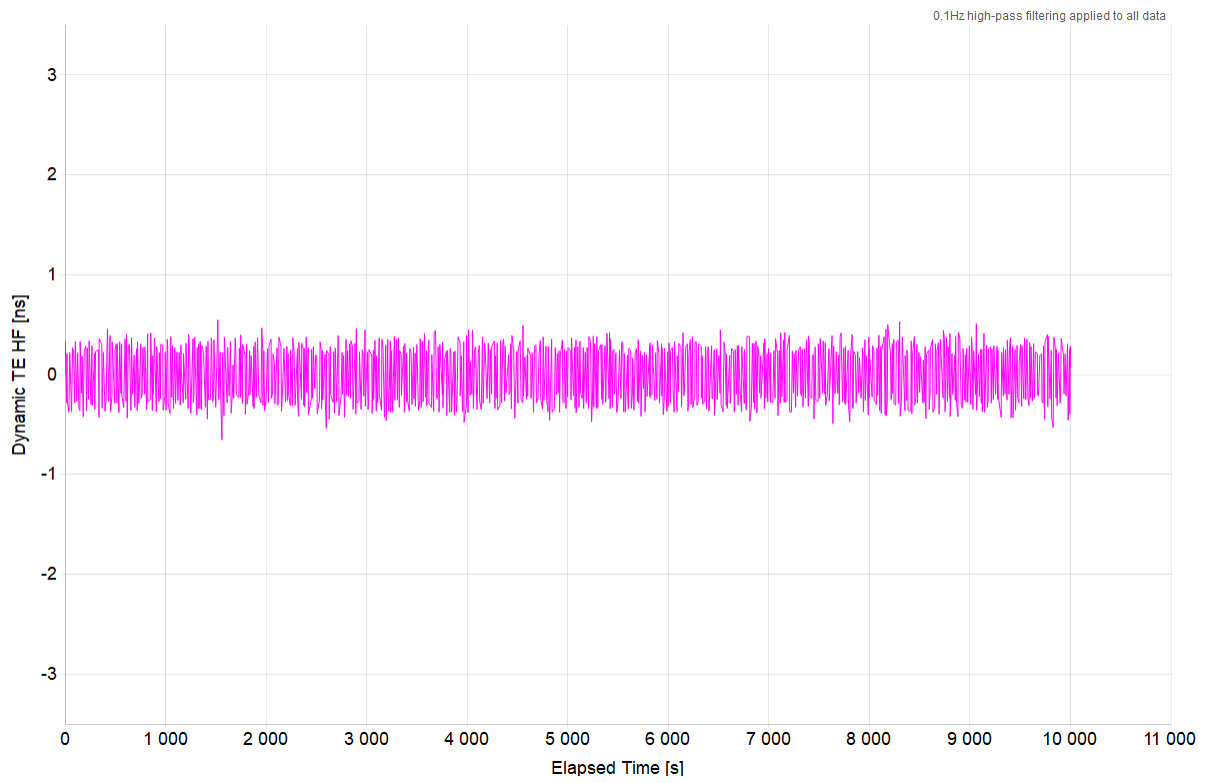


|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 0      |
| <b>Min [ns]</b>     | -0.656 |
| <b>Max [ns]</b>     | 0.546  |
| <b>Max-Min [ns]</b> | 1.202  |

### 3.6 DTEMTIE Analysis

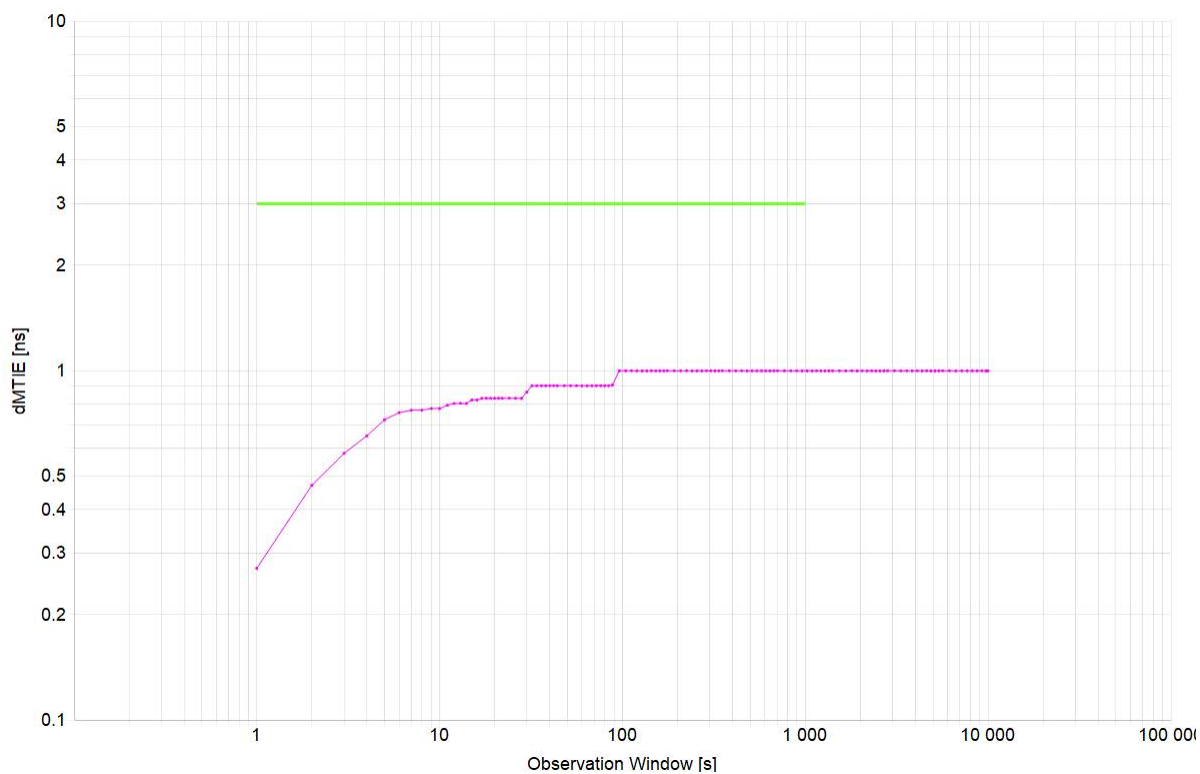

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.272 |
| <b>Max [ns]</b>     | 0.998 |
| <b>Max-Min [ns]</b> | 0.726 |

### 3.7 DTETDEV Analysis

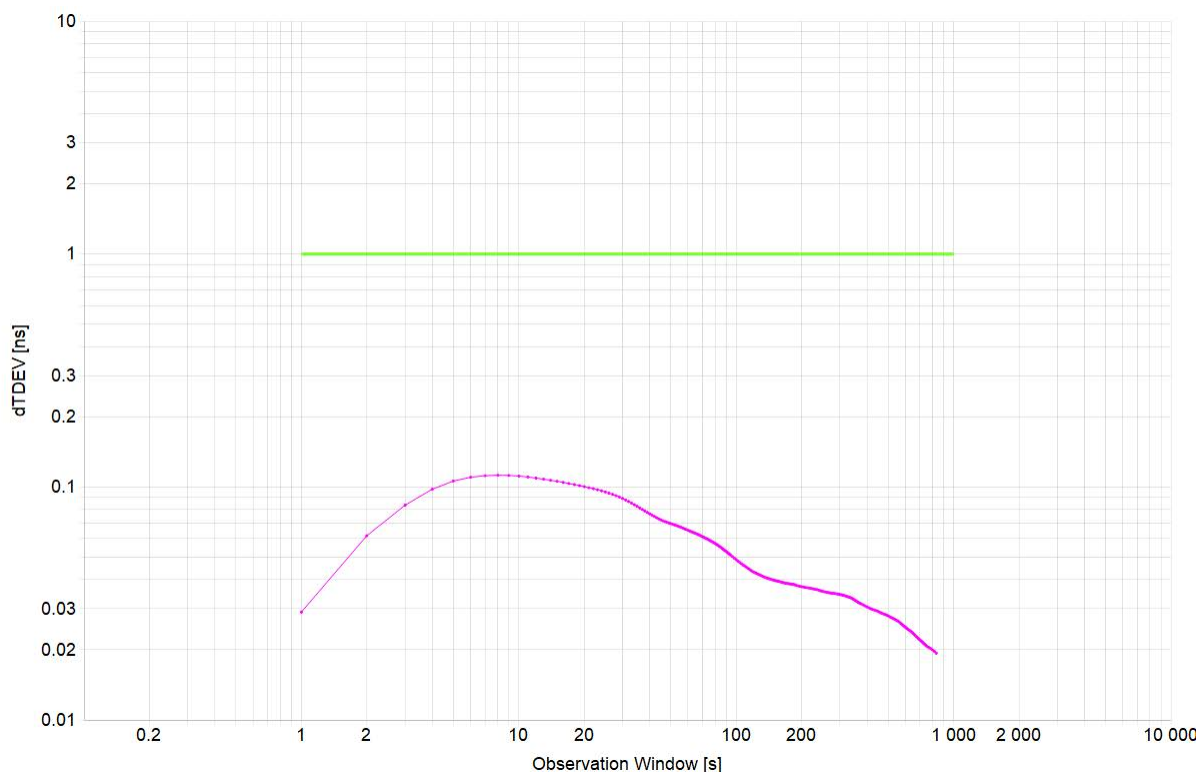


|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.019 |
| <b>Max [ns]</b>     | 0.112 |
| <b>Max-Min [ns]</b> | 0.093 |

## 4. G.8273.2: Noise Generation – PTP

|                               |                        |
|-------------------------------|------------------------|
| <b>Test Description</b>       | Noise Generation - PTP |
| <b>Report Date</b>            | 23-02-10_13-07-16      |
| <b>Packet Rate (pkt/s)</b>    | 16                     |
| <b>Beginning of Test</b>      | 2023-02-07 5:49:51 PM  |
| <b>Test Duration</b>          | 02:46:40               |
| <b>Time to Phase Lock (s)</b> | 18                     |


|                                      |   |
|--------------------------------------|---|
| <b>All Mask Results</b>              | <b>Pass</b>   |
| <b>Mask TIMEERROR</b>                | 0.05 $\mu$ s  |
| <b>Mask TIMEERROR Result</b>         | <b>Pass</b>   |
| <b>Mask FILTEREDTIMEERROR</b>        | 0.005 $\mu$ s                                       |
| <b>Mask FILTEREDTIMEERROR Result</b> | <b>Pass</b>   |
| <b>Mask CTE</b>                      | 0.01 $\mu$ s  |
| <b>Mask CTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTE</b>                      | 0.01 $\mu$ s  |
| <b>Mask DTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTEHF</b>                    | 0.07 $\mu$ s  |
| <b>Mask DTEHF Result</b>             | <b>Pass</b>   |
| <b>Mask DTEMTIE</b>                  | G.8273.2 T-BC Class C Dynamic TE LF<br>Const. Temp. |
| <b>Mask DTEMTIE Result</b>           | <b>Pass</b>   |
| <b>Mask DTETDEV</b>                  | G.8273.2 T-BC Class C Dynamic TE LF<br>Const. Temp. |
| <b>Mask DTETDEV Result</b>           | <b>Pass</b>   |

## 4.1 TIMEERROR Analysis

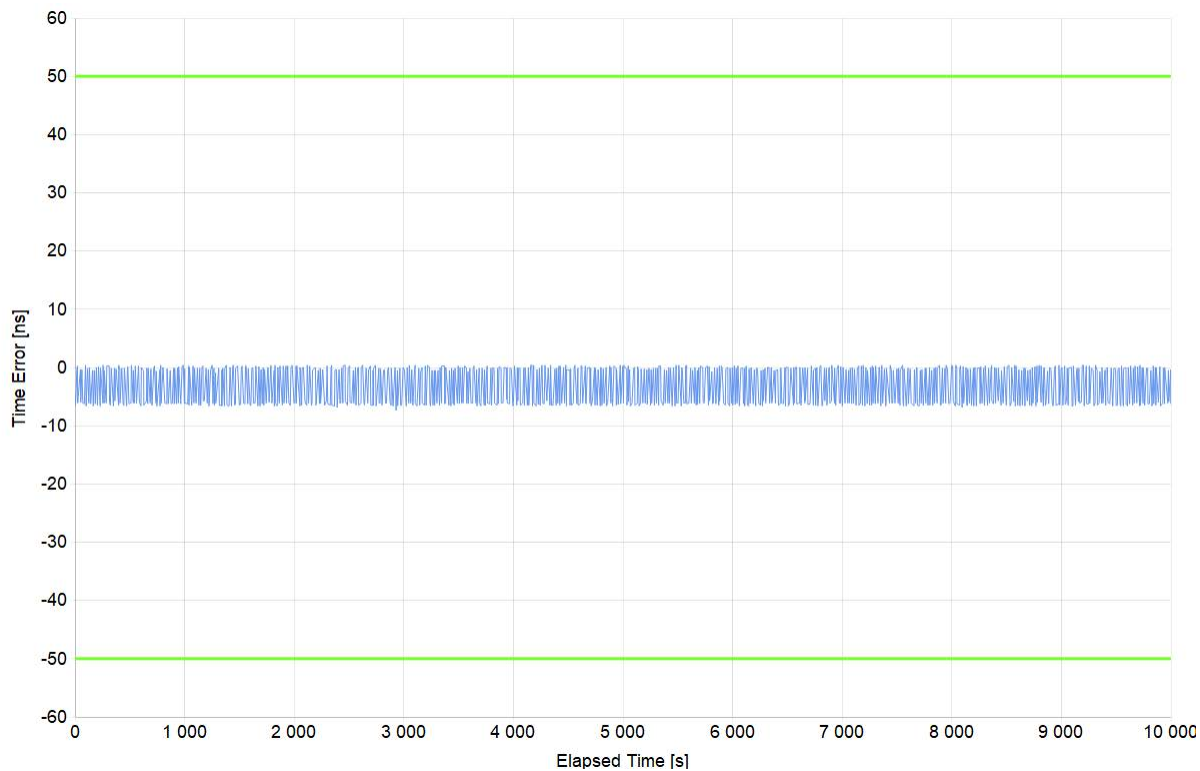

|                   |        |
|-------------------|--------|
| <b>Pk-Pk [ns]</b> | 7.75   |
| <b>Mean [ns]</b>  | -3.183 |
| <b>Min [ns]</b>   | -7.363 |
| <b>Max [ns]</b>   | 0.387  |

## 4.2 FILTEREDTIMEERROR Analysis

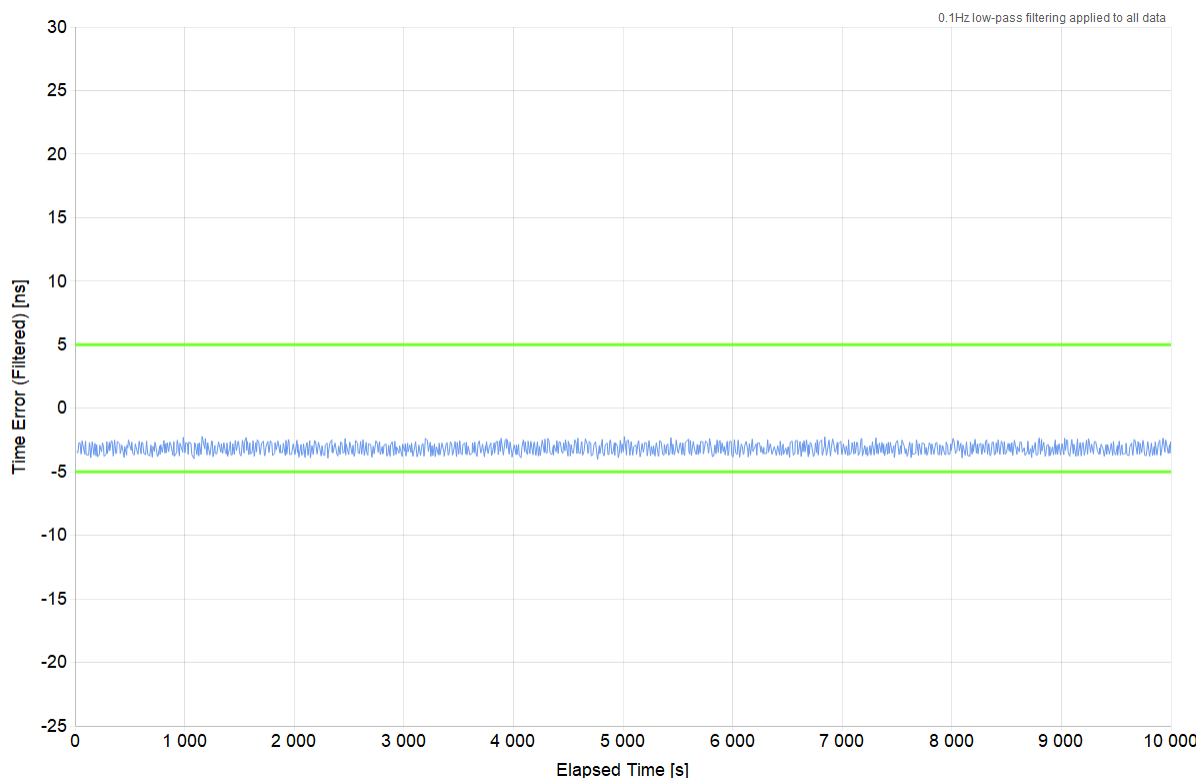


|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | -3.183 |
| <b>Min [ns]</b>     | -4.024 |
| <b>Max [ns]</b>     | -2.222 |
| <b>Max-Min [ns]</b> | 1.802  |




### 4.3 CTE Analysis

|                           |      |
|---------------------------|------|
| <b>Averaging Time (s)</b> | 1000 |
|---------------------------|------|

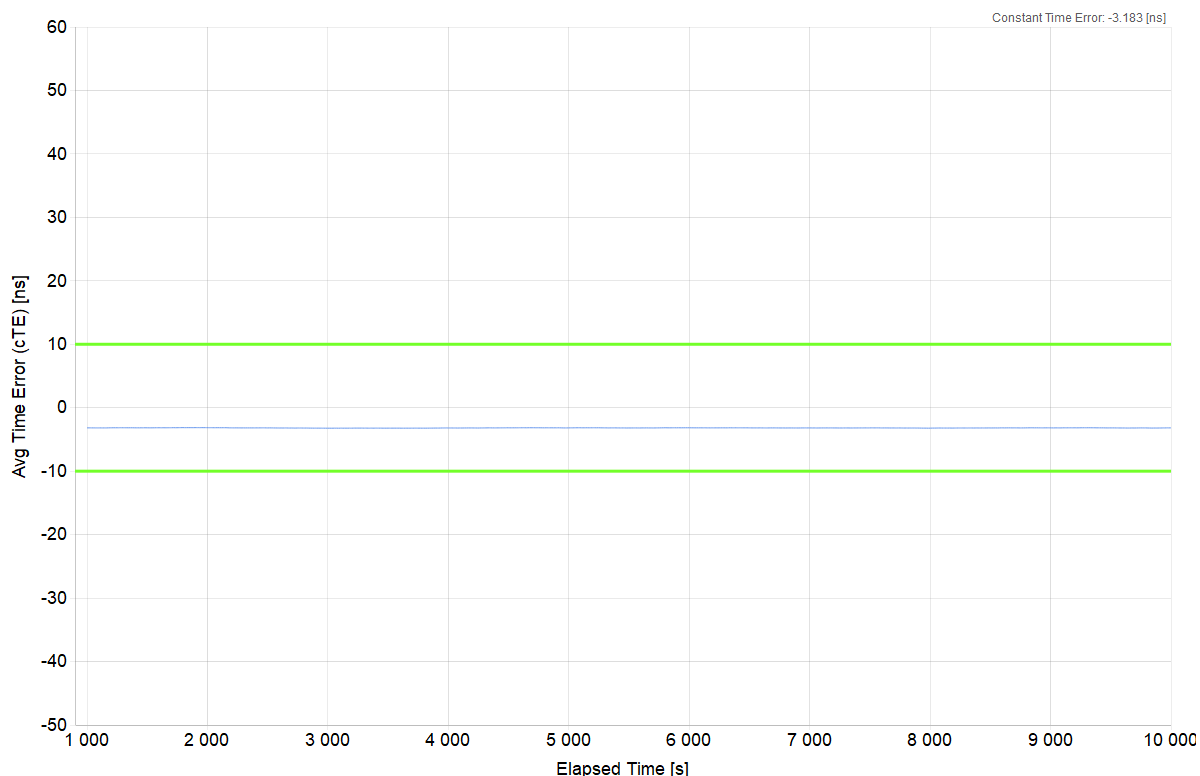


|                                 |        |
|---------------------------------|--------|
| <b>Constant Time Error [ns]</b> | -3.183 |
| <b>Min [ns]</b>                 | -3.228 |
| <b>Max [ns]</b>                 | -3.137 |
| <b>Max-Min [ns]</b>             | 0.091  |

## 4.4 DTE Analysis

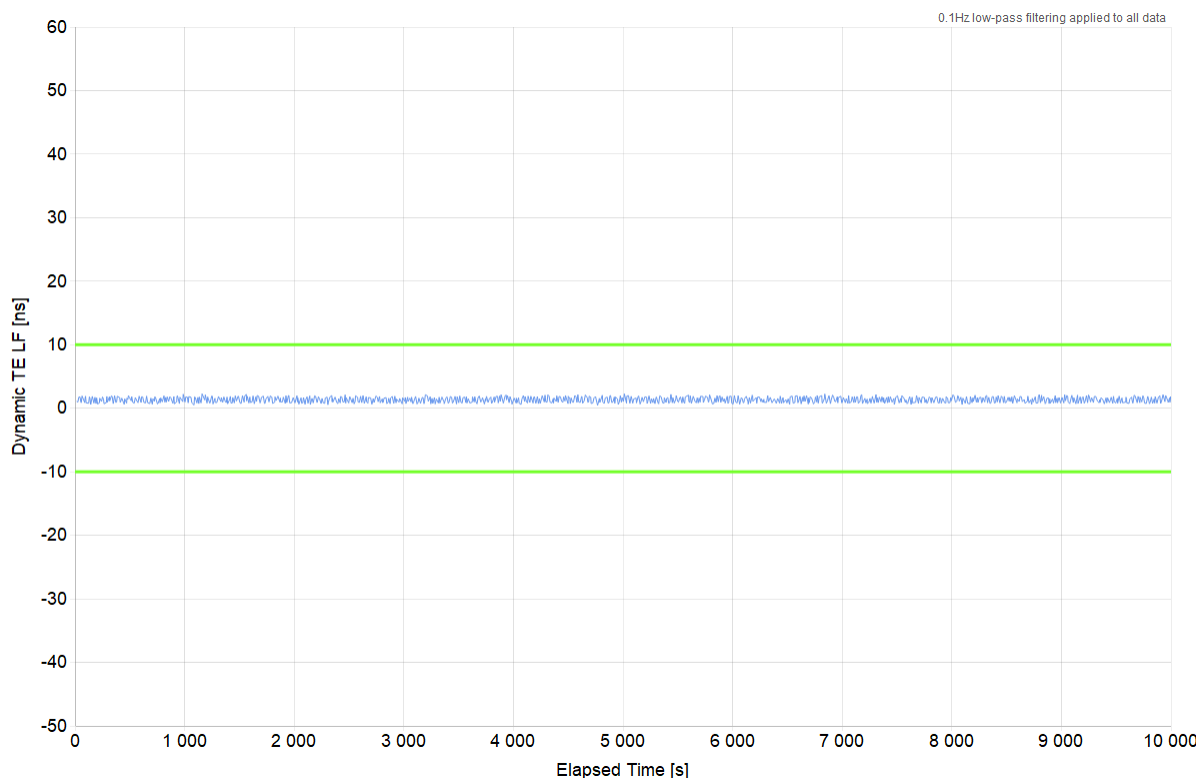


|                     |       |
|---------------------|-------|
| <b>Mean [ns]</b>    | 1.306 |
| <b>Min [ns]</b>     | 0.464 |
| <b>Max [ns]</b>     | 2.267 |
| <b>Max-Min [ns]</b> | 1.802 |

## 4.5 DTEHF Analysis

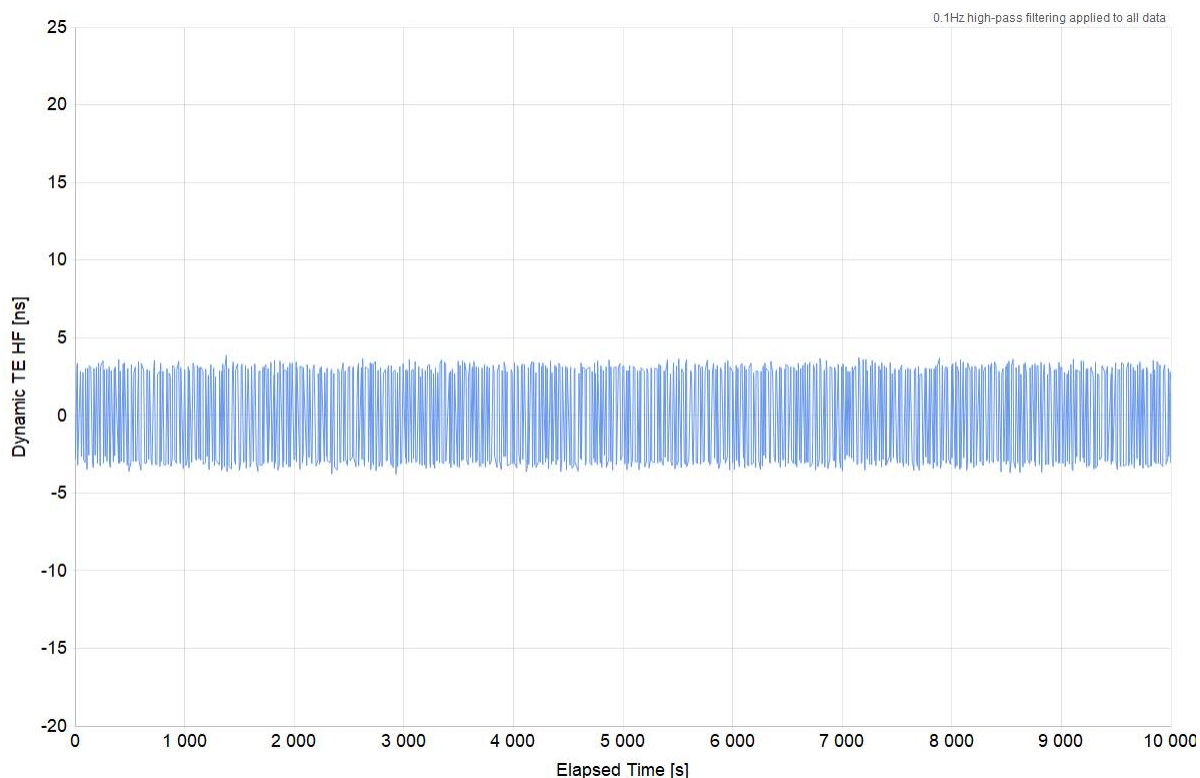


|                   |        |
|-------------------|--------|
| <b>Pk-Pk [ns]</b> | 7.666  |
| <b>Mean [ns]</b>  | 0      |
| <b>Min [ns]</b>   | -3.791 |
| <b>Max [ns]</b>   | 3.875  |

## 4.6 DTEMTIE Analysis

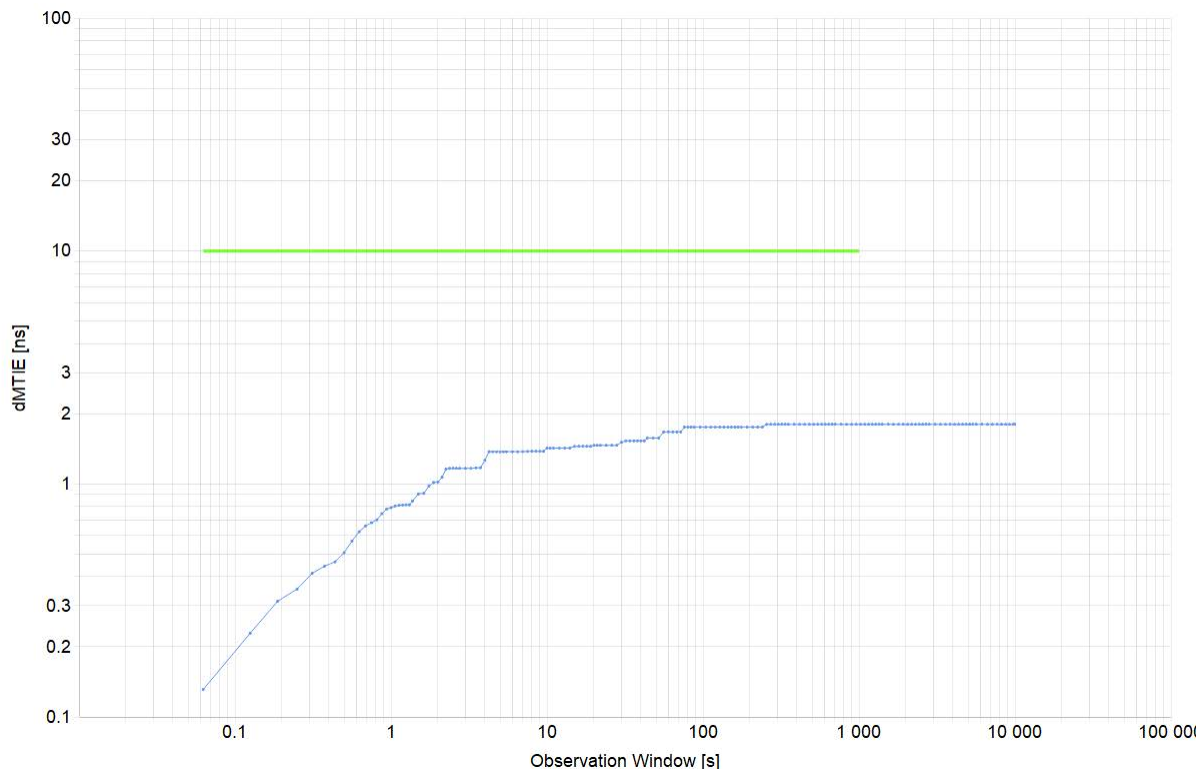

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.131 |
| <b>Max [ns]</b>     | 1.802 |
| <b>Max-Min [ns]</b> | 1.671 |

## 4.7 DTETDEV Analysis

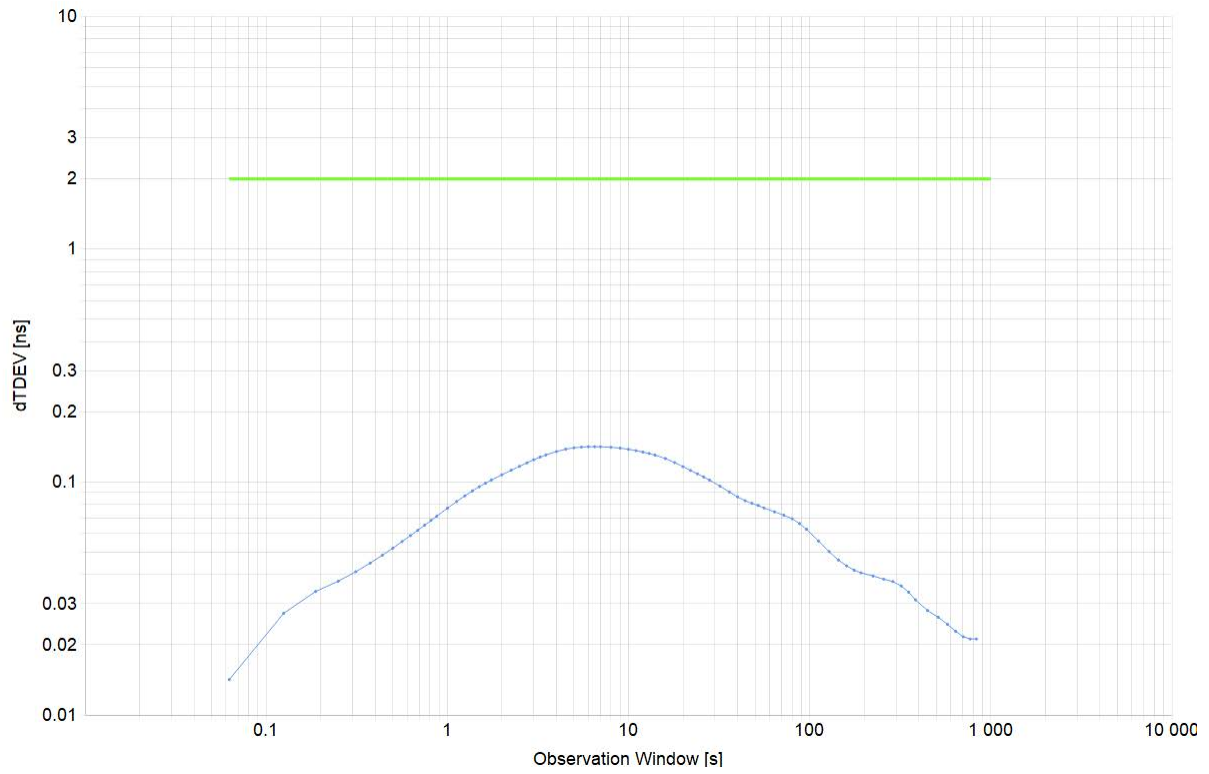

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.014 |
| <b>Max [ns]</b>     | 0.142 |
| <b>Max-Min [ns]</b> | 0.128 |

## 5. G.8273.2: Noise Generation – No SyncE – 1PPS

|                               |                                    |
|-------------------------------|------------------------------------|
| <b>Test Description</b>       | Noise Generation – No SyncE – 1PPS |
| <b>Report Date</b>            | 23-02-10_13-07-16                  |
| <b>Packet Rate (pkt/s)</b>    | 16                                 |
| <b>Beginning of Test</b>      | 2023-02-07 9:59:48 PM              |
| <b>Test Duration</b>          | 02:46:40                           |
| <b>Time to Phase Lock (s)</b> | 19                                 |


|                                      |   |
|--------------------------------------|---|
| <b>All Mask Results</b>              | <b>Pass</b>   |
| <b>Mask ONEPPS</b>                   | 0.03μs  |
| <b>Mask ONEPPS Result</b>            | <b>Pass</b>   |
| <b>Mask FILTEREDTIMEERROR</b>        | 0.005μs   |
| <b>Mask FILTEREDTIMEERROR Result</b> | <b>Pass</b>   |
| <b>Mask CTE</b>                      | 0.01μs  |
| <b>Mask CTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTE</b>                      | 0.01μs  |
| <b>Mask DTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTEHF</b>                    | 0.07μs  |
| <b>Mask DTEHF Result</b>             | <b>Pass</b>   |
| <b>Mask DTEMTIE</b>                  | G.8273.2 T-BC Provisional Class D Dynamic<br>TE LF Const. Temp. |
| <b>Mask DTEMTIE Result</b>           | <b>Pass</b>   |
| <b>Mask DTETDEV</b>                  | G.8273.2 T-BC Provisional Class D Dynamic<br>TE LF Const. Temp. |
| <b>Mask DTETDEV Result</b>           | <b>Pass</b>   |

1. SyncE was disabled using a parameter in the PCM4L Json file to set the SyncE clock category below the desired threshold:  

```
physicalPllClockCategory = 4,  
physicalPllClockCategoryThreshold = 1,
```


## 5.1 ONEPPS Analysis

|                        |          |
|------------------------|----------|
| Offset Removal Applied | Off      |
| Zero Offset            | -2.803ns |

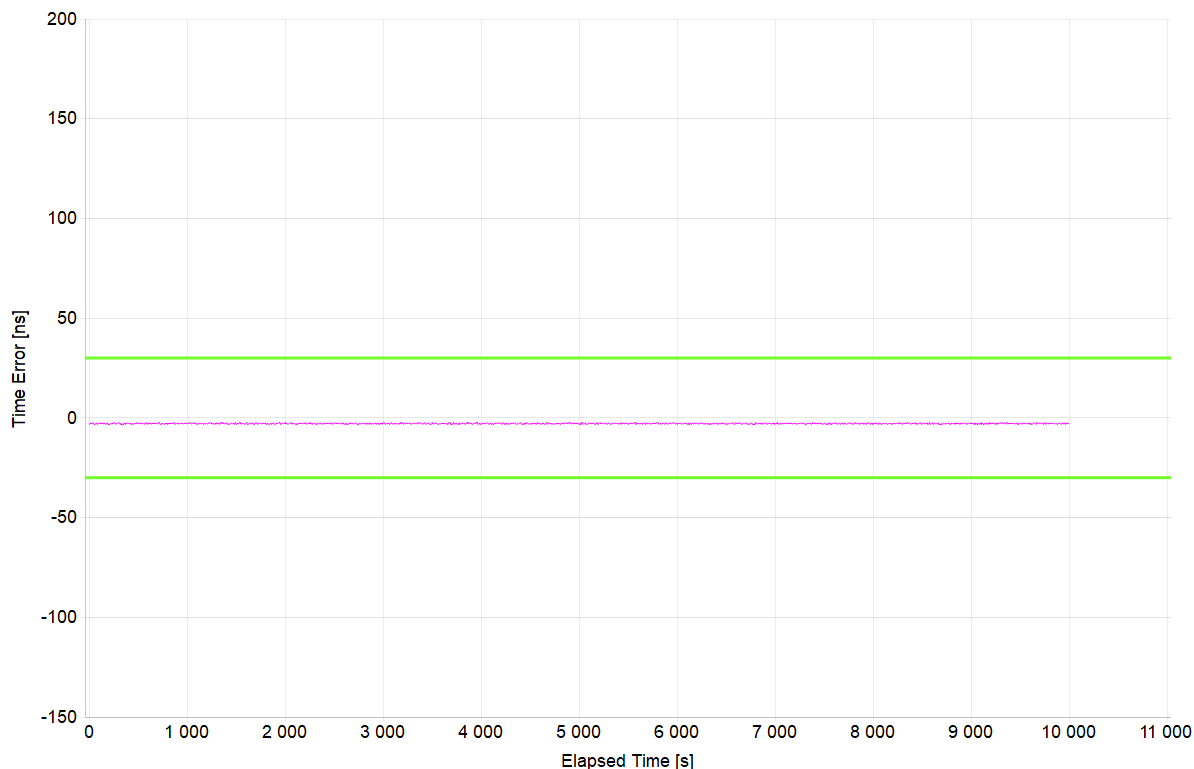

|              |        |
|--------------|--------|
| Mean [ns]    | -2.863 |
| Min [ns]     | -3.553 |
| Max [ns]     | -2.053 |
| Max-Min [ns] | 1.5    |

## 5.2 FILTEREDTIMEERROR Analysis

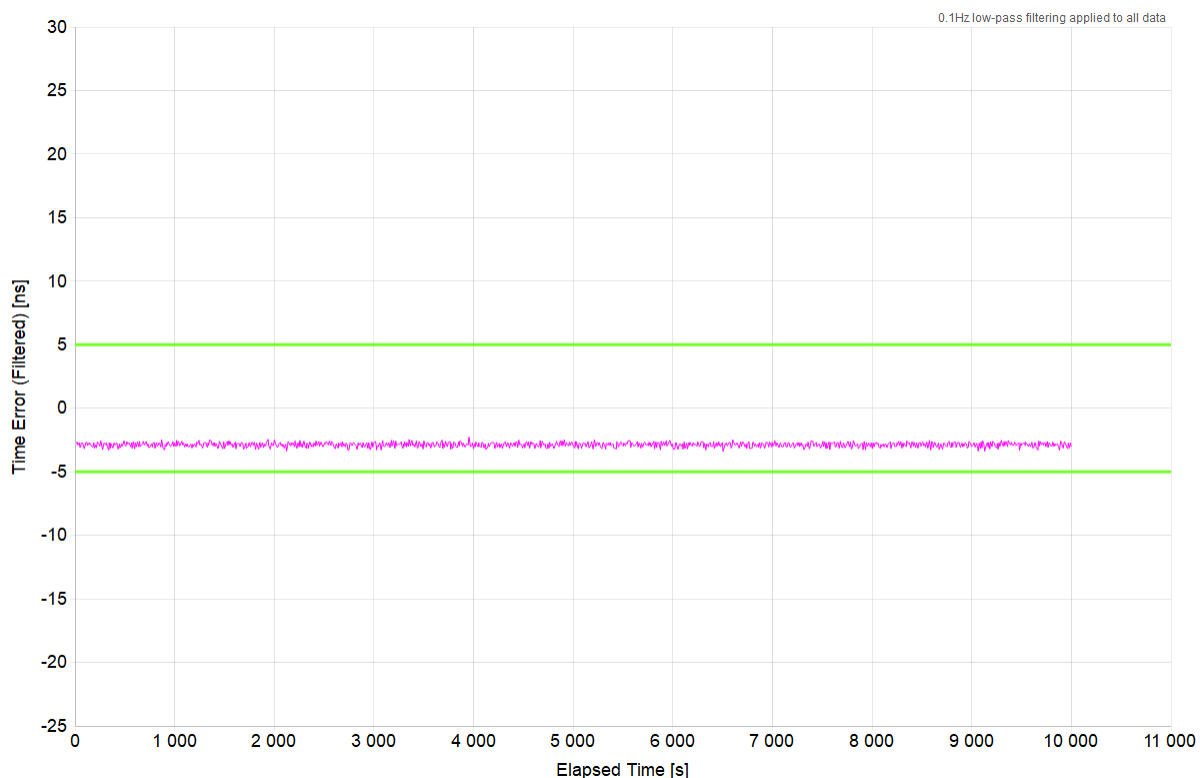


|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | -2.863 |
| <b>Min [ns]</b>     | -3.403 |
| <b>Max [ns]</b>     | -2.268 |
| <b>Max-Min [ns]</b> | 1.136  |




### 5.3 CTE Analysis

|                           |      |
|---------------------------|------|
| <b>Averaging Time (s)</b> | 1000 |
|---------------------------|------|

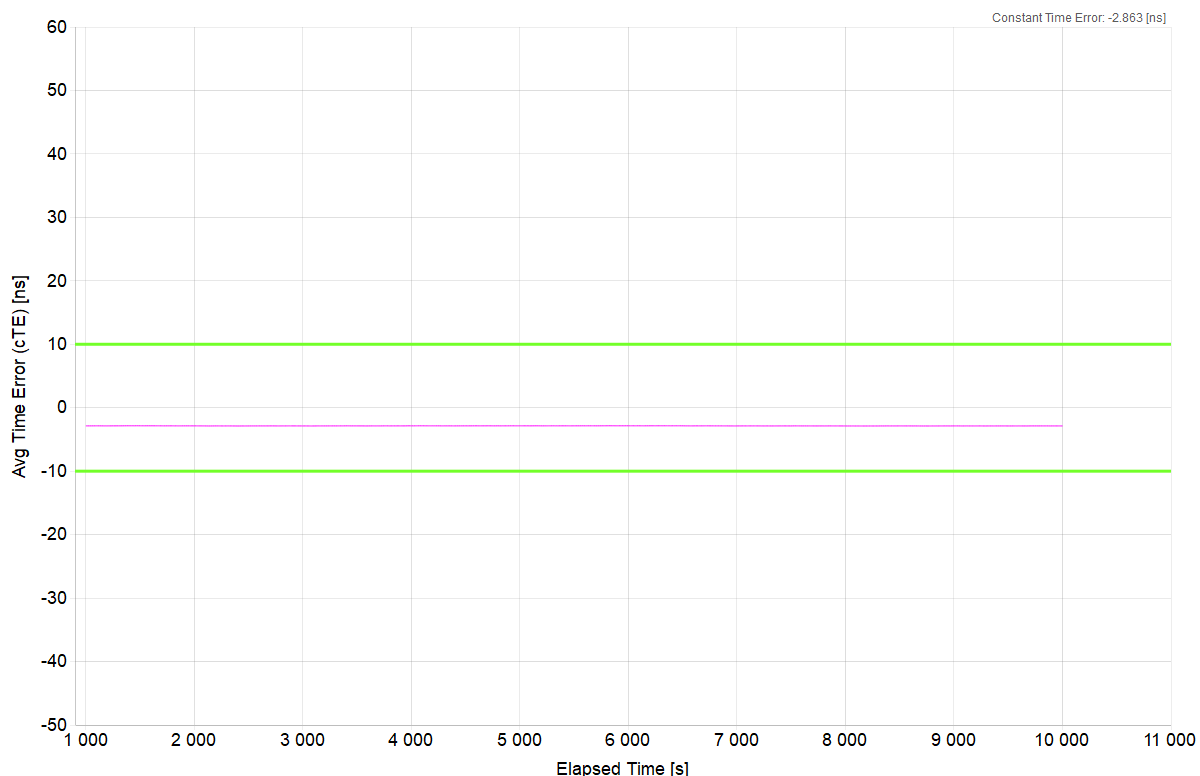


|                                 |        |
|---------------------------------|--------|
| <b>Constant Time Error [ns]</b> | -2.863 |
| <b>Min [ns]</b>                 | -2.88  |
| <b>Max [ns]</b>                 | -2.844 |
| <b>Max-Min [ns]</b>             | 0.036  |

## 5.4 DTE Analysis

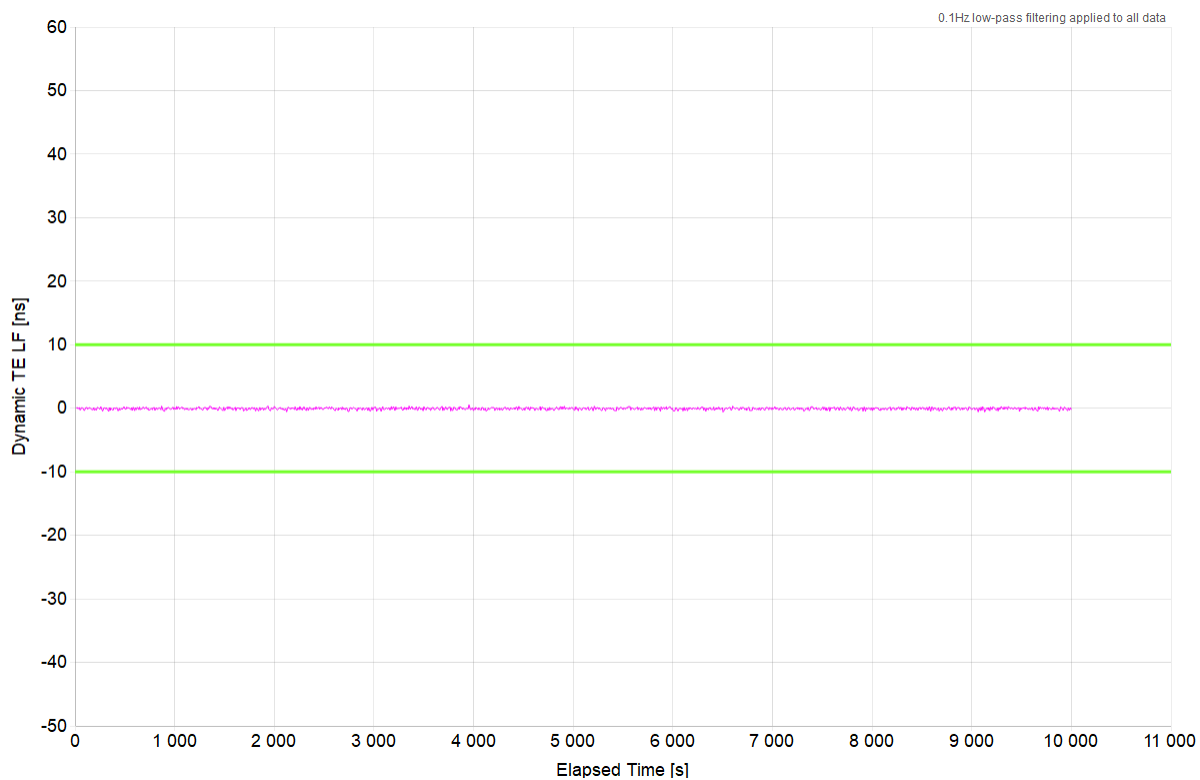


|                     |       |
|---------------------|-------|
| <b>Mean [ns]</b>    | -0.06 |
| <b>Min [ns]</b>     | -0.6  |
| <b>Max [ns]</b>     | 0.535 |
| <b>Max-Min [ns]</b> | 1.136 |

## 5.5 DTEHF Analysis

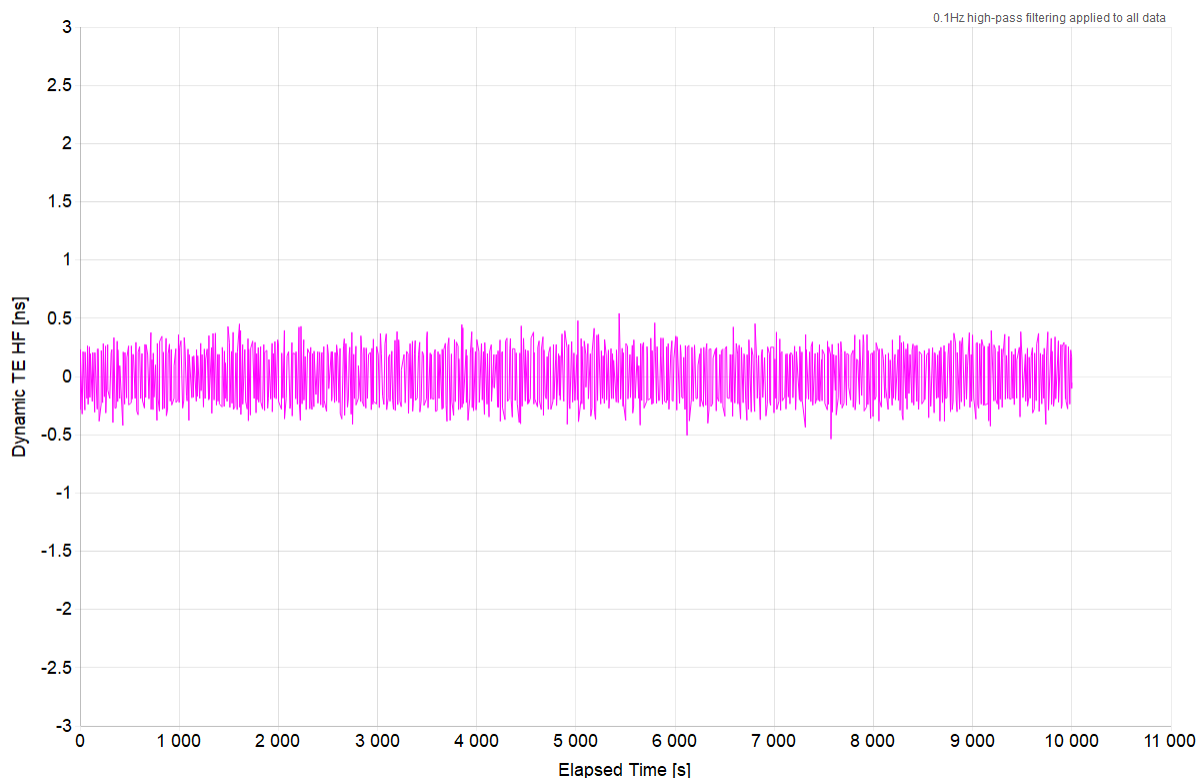


|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 0      |
| <b>Min [ns]</b>     | -0.537 |
| <b>Max [ns]</b>     | 0.542  |
| <b>Max-Min [ns]</b> | 1.079  |

## 5.6 DTEMTIE Analysis

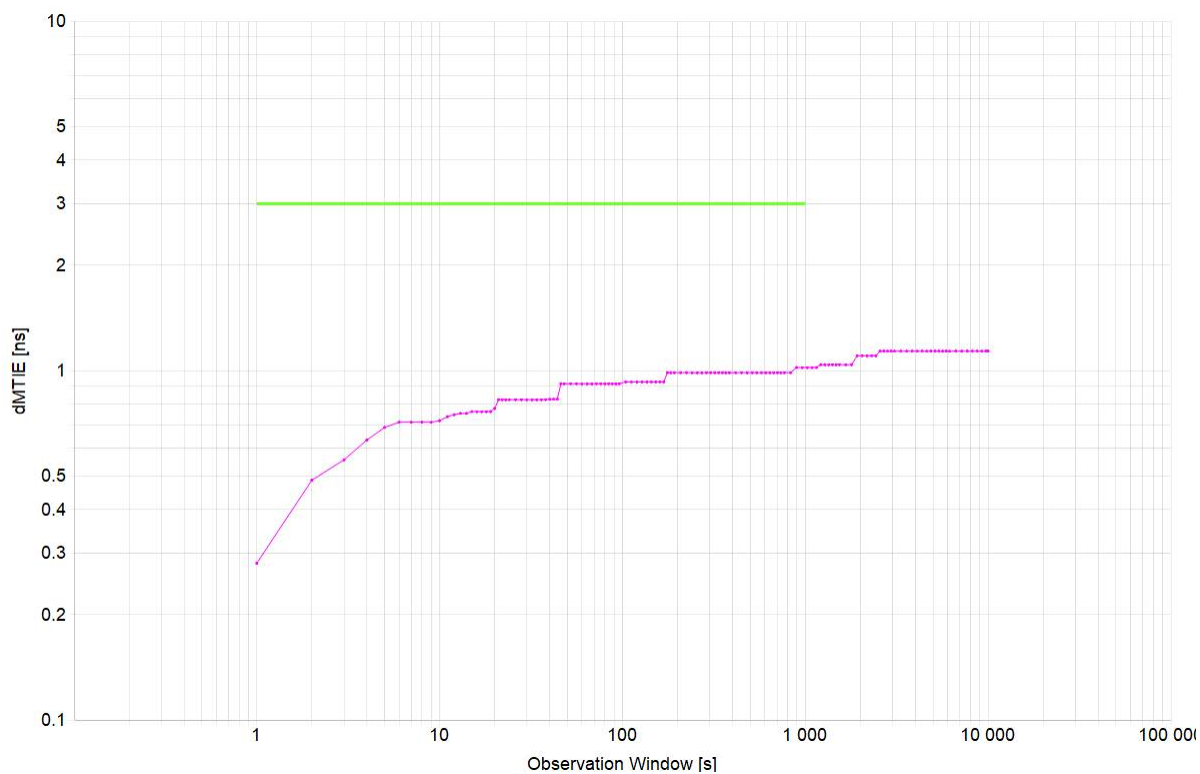

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.281 |
| <b>Max [ns]</b>     | 1.136 |
| <b>Max-Min [ns]</b> | 0.855 |

## 5.7 DTETDEV Analysis

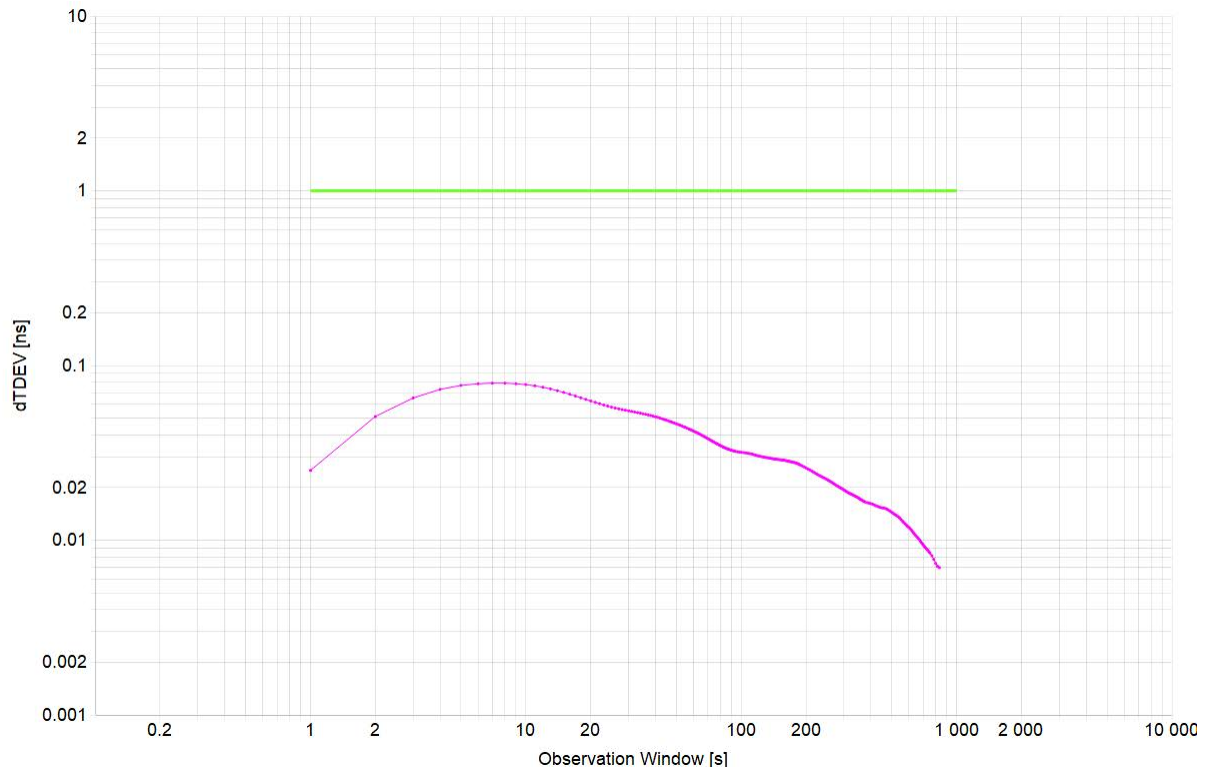

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.007 |
| <b>Max [ns]</b>     | 0.079 |
| <b>Max-Min [ns]</b> | 0.072 |

## 6. G.8273.2: Noise Generation – No SyncE – PTP


|                               |                                   |
|-------------------------------|-----------------------------------|
| <b>Test Description</b>       | Noise Generation – No SyncE - PTP |
| <b>Report Date</b>            | 23-02-10_13-07-16                 |
| <b>Packet Rate (pkt/s)</b>    | 16                                |
| <b>Beginning of Test</b>      | 2023-02-07 9:59:48 PM             |
| <b>Test Duration</b>          | 02:46:39                          |
| <b>Time to Phase Lock (s)</b> | 19                                |

|                                      |   |
|--------------------------------------|---|
| <b>All Mask Results</b>              | <b>Pass</b>   |
| <b>Mask TIMEERROR</b>                | 0.05µs  |
| <b>Mask TIMEERROR Result</b>         | <b>Pass</b>   |
| <b>Mask FILTEREDTIMEERROR</b>        | 0.005µs   |
| <b>Mask FILTEREDTIMEERROR Result</b> | <b>Pass</b>   |
| <b>Mask CTE</b>                      | 0.01µs  |
| <b>Mask CTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTE</b>                      | 0.01µs  |
| <b>Mask DTE Result</b>               | <b>Pass</b>   |
| <b>Mask DTEHF</b>                    | 0.07µs  |
| <b>Mask DTEHF Result</b>             | <b>Pass</b>   |
| <b>Mask DTEMTIE</b>                  | G.8273.2 T-BC Class C Dynamic TE LF<br>Const. Temp. |
| <b>Mask DTEMTIE Result</b>           | <b>Pass</b>   |
| <b>Mask DTETDEV</b>                  | G.8273.2 T-BC Class C Dynamic TE LF<br>Const. Temp. |
| <b>Mask DTETDEV Result</b>           | <b>Pass</b>   |

1. SyncE was disabled using a parameter in the PCM4L Json file to set the SyncE clock category below the desired threshold:  


```
physicalPllClockCategory = 4,  
physicalPllClockCategoryThreshold = 1,
```

## 6.1 TIMEERROR Analysis

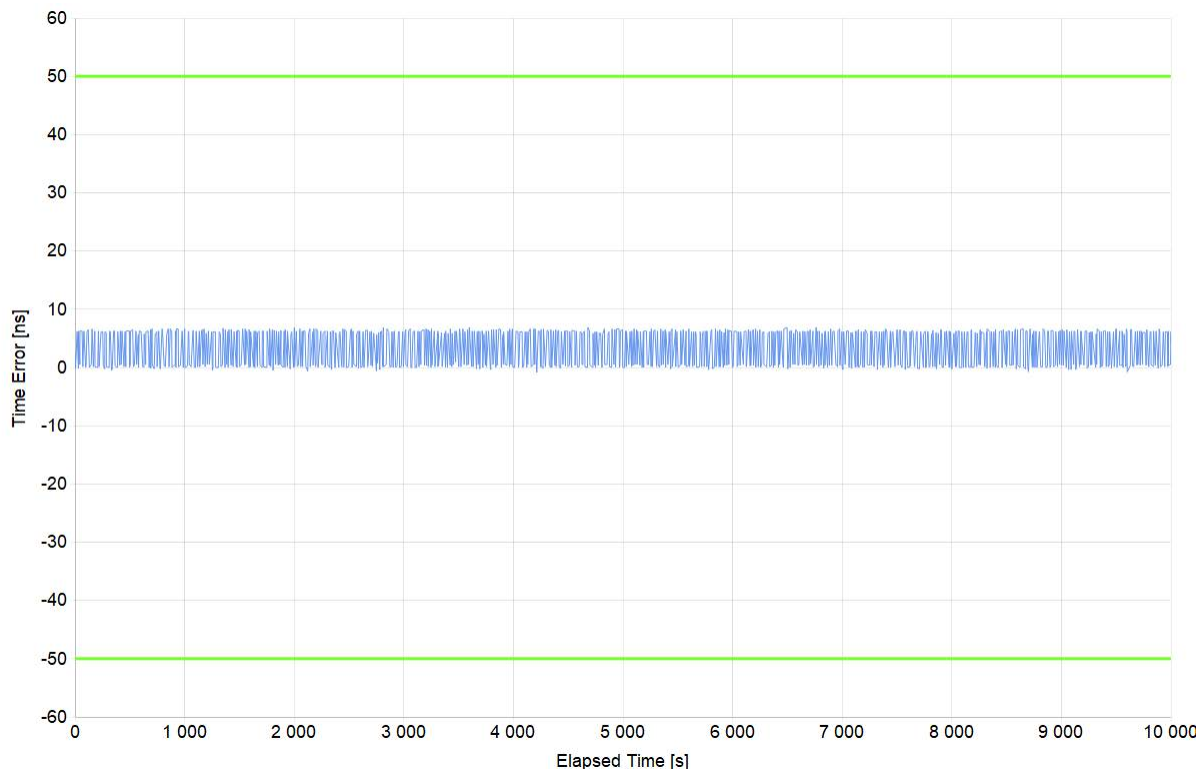

|                   |        |
|-------------------|--------|
| <b>Pk-Pk [ns]</b> | 7.75   |
| <b>Mean [ns]</b>  | 3.228  |
| <b>Min [ns]</b>   | -0.875 |
| <b>Max [ns]</b>   | 6.875  |

## 6.2 FILTEREDTIMEERROR Analysis

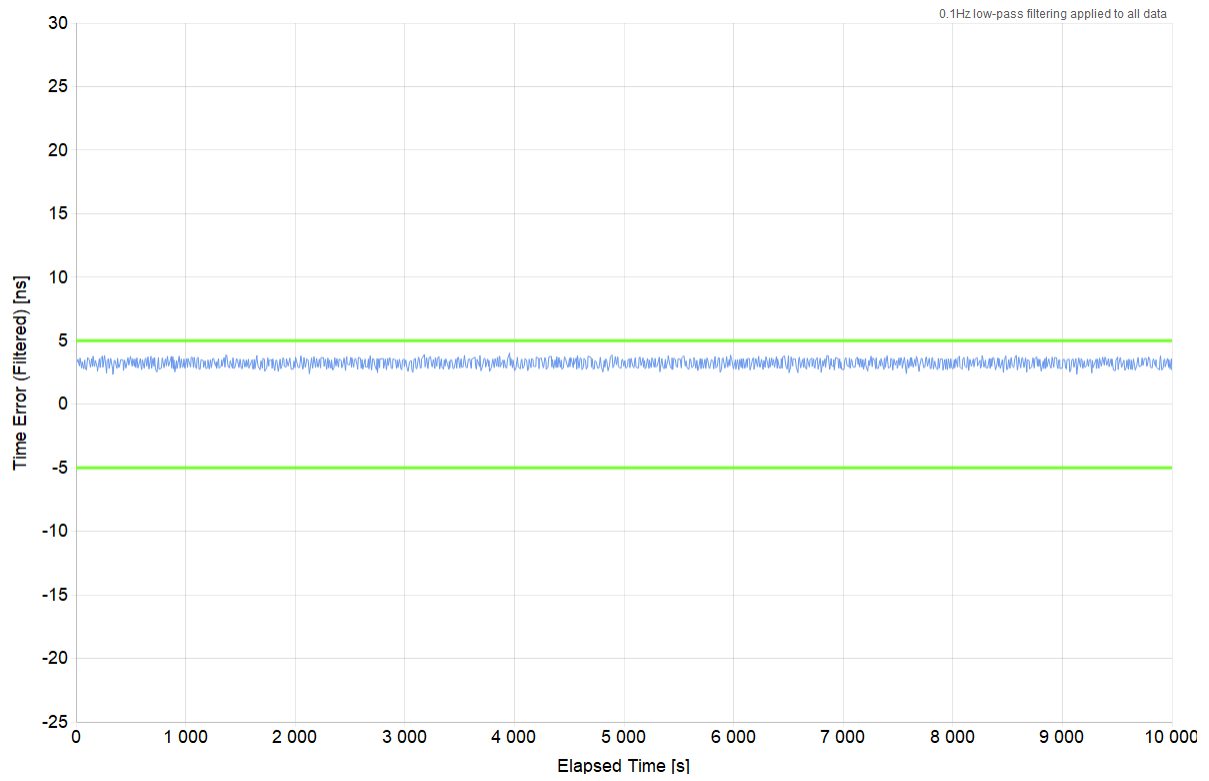


|                     |       |
|---------------------|-------|
| <b>Mean [ns]</b>    | 3.228 |
| <b>Min [ns]</b>     | 2.341 |
| <b>Max [ns]</b>     | 4.031 |
| <b>Max-Min [ns]</b> | 1.69  |




### 6.3 CTE Analysis

|                           |      |
|---------------------------|------|
| <b>Averaging Time (s)</b> | 1000 |
|---------------------------|------|

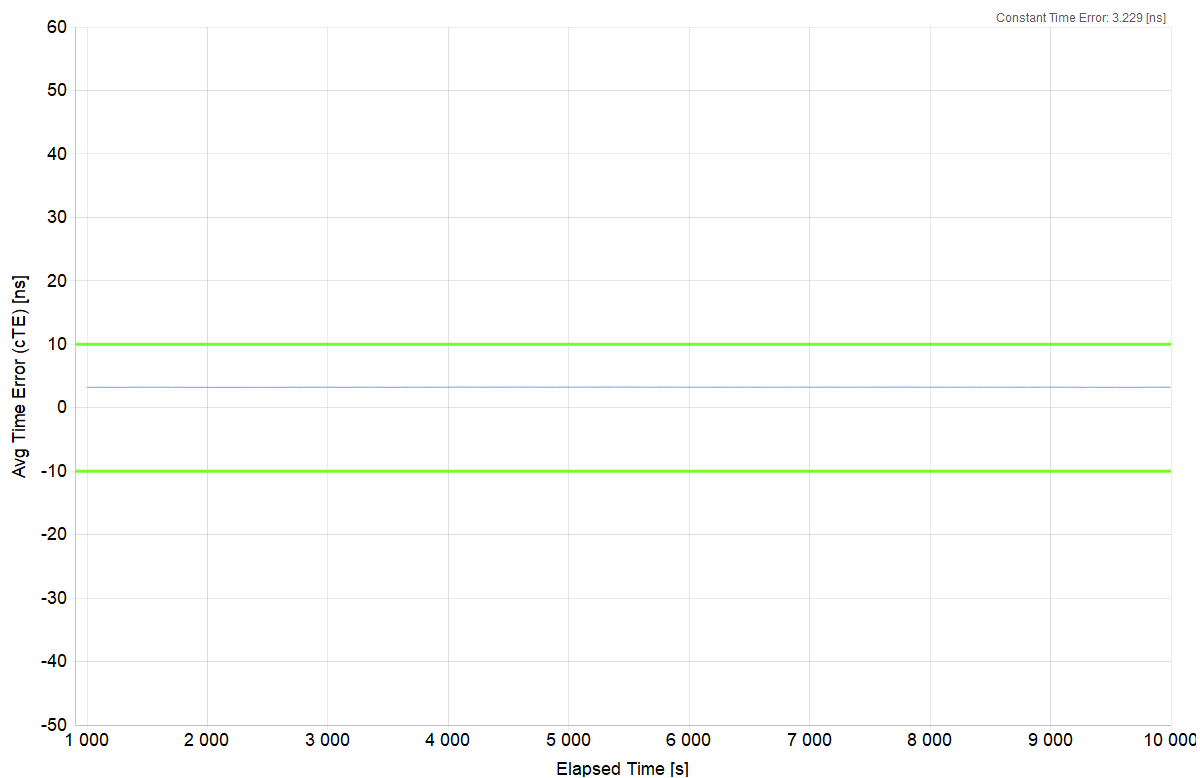


|                                 |       |
|---------------------------------|-------|
| <b>Constant Time Error [ns]</b> | 3.229 |
| <b>Min [ns]</b>                 | 3.205 |
| <b>Max [ns]</b>                 | 3.249 |
| <b>Max-Min [ns]</b>             | 0.044 |

## 6.4 DTE Analysis

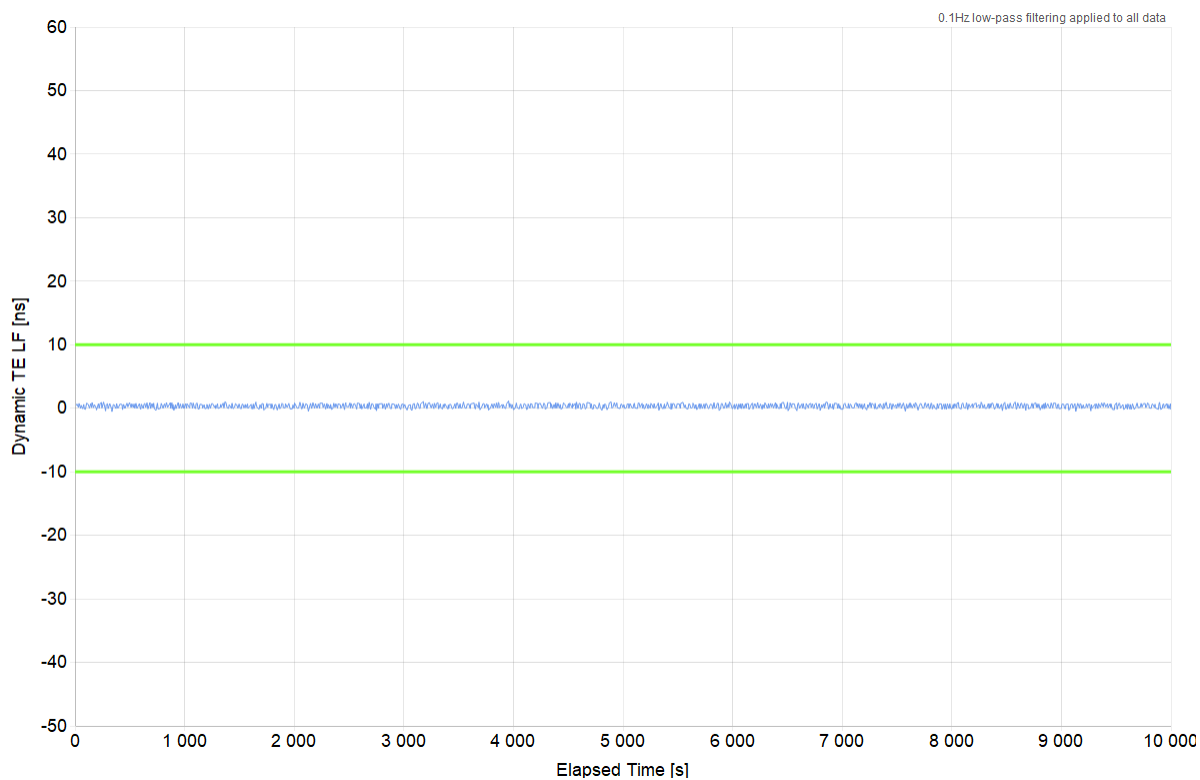


|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 0.353  |
| <b>Min [ns]</b>     | -0.534 |
| <b>Max [ns]</b>     | 1.156  |
| <b>Max-Min [ns]</b> | 1.69   |

## 6.5 DTEHF Analysis

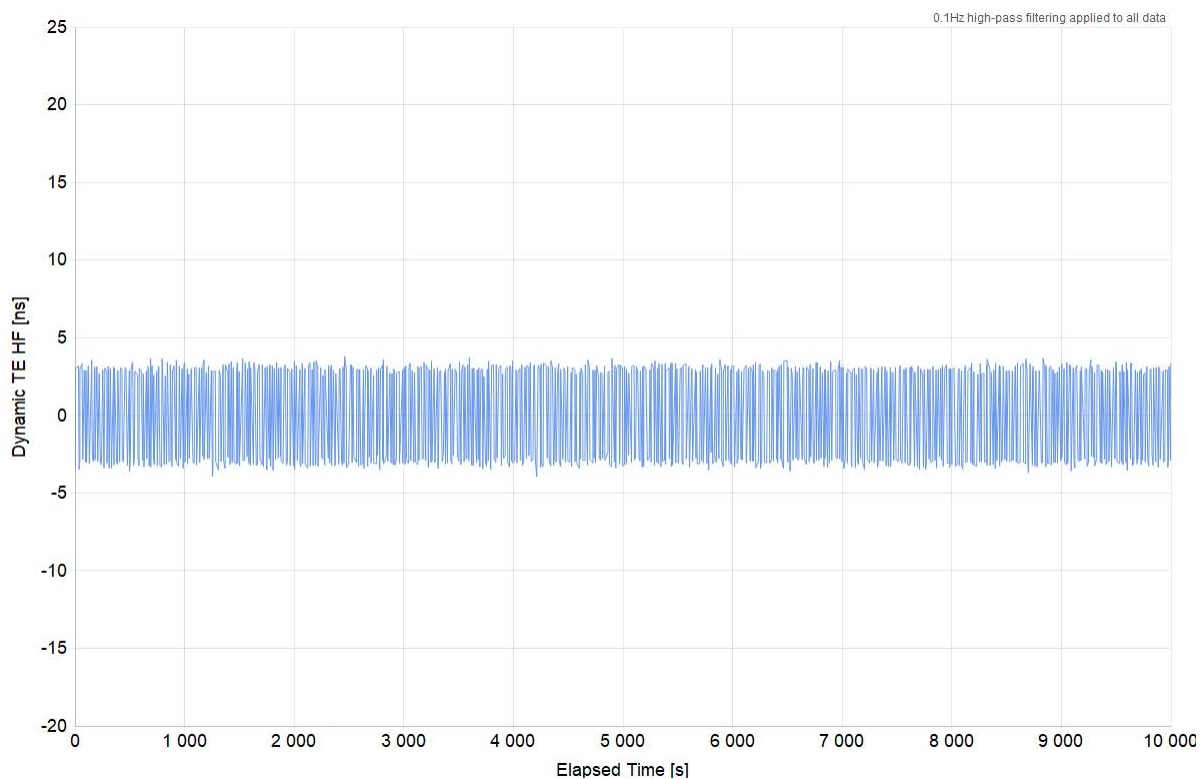


|                   |        |
|-------------------|--------|
| <b>Pk-Pk [ns]</b> | 7.74   |
| <b>Mean [ns]</b>  | 0      |
| <b>Min [ns]</b>   | -3.943 |
| <b>Max [ns]</b>   | 3.797  |

## 6.6 DTEMTIE Analysis

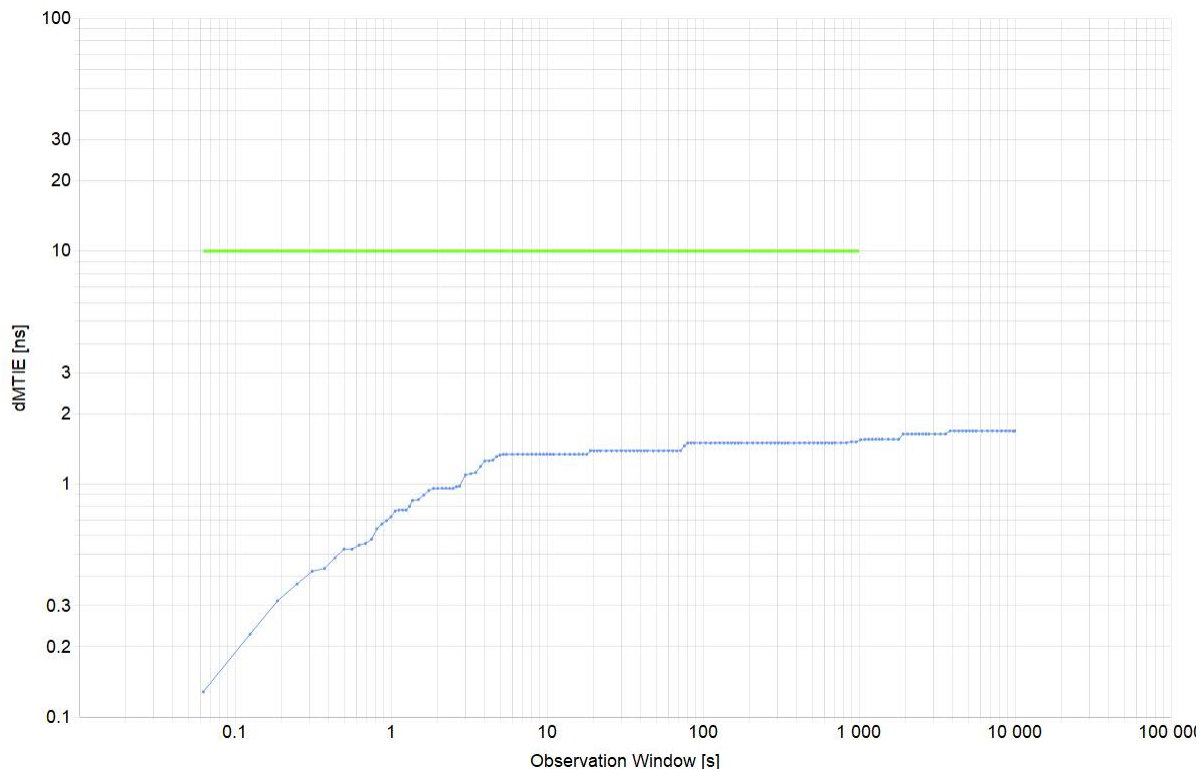

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.128 |
| <b>Max [ns]</b>     | 1.69  |
| <b>Max-Min [ns]</b> | 1.562 |

## 6.7 DTETDEV Analysis

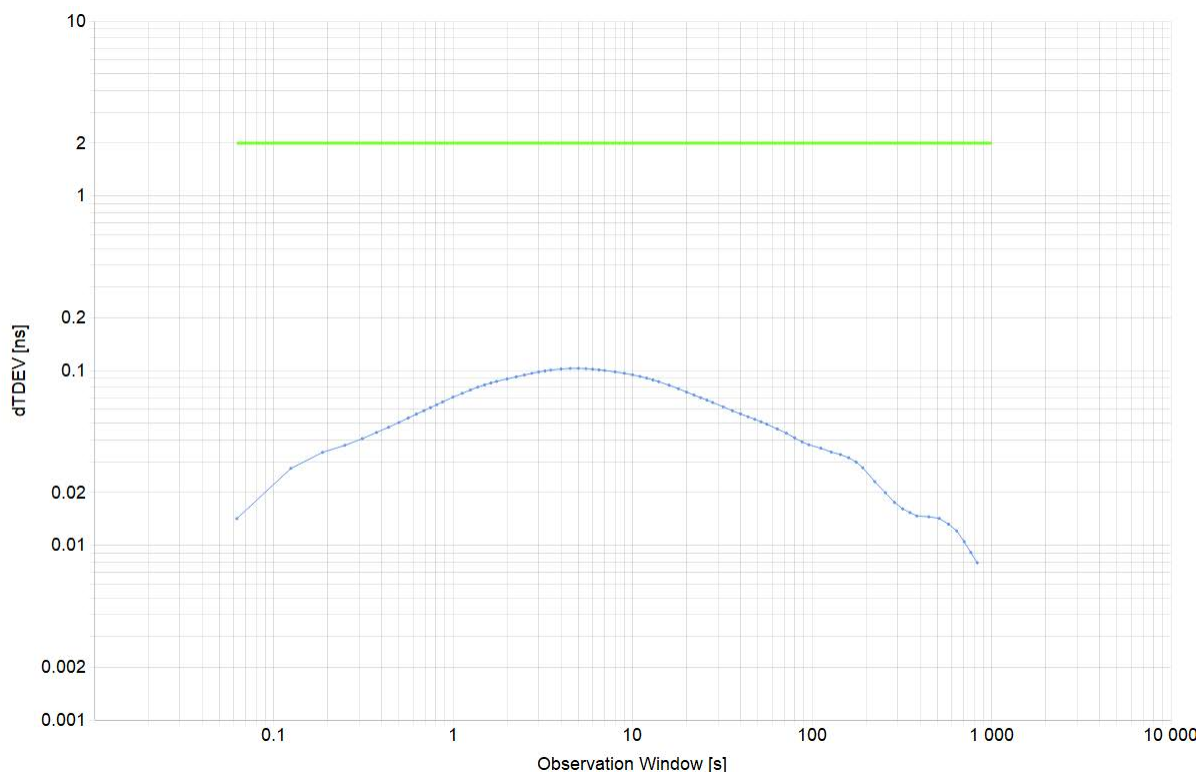

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.008 |
| <b>Max [ns]</b>     | 0.103 |
| <b>Max-Min [ns]</b> | 0.095 |

## 7. G.8273.2: Holdover – 1PPS


|                               |                        |
|-------------------------------|------------------------|
| <b>Test Description</b>       | Holdover – 1PPS        |
| <b>Report Date</b>            | 23-02-10_13-07-16      |
| <b>Packet Rate (pkt/s)</b>    | 16                     |
| <b>Beginning of Test</b>      | 2023-02-08 10:39:11 AM |
| <b>Test Duration</b>          | 00:16:47               |
| <b>Time to Phase Lock (s)</b> | 23                     |

|                           |   |
|---------------------------|---|
| <b>All Mask Results</b>   | <b>Pass</b>   |
| <b>Mask ONEPPS</b>        | -   |
| <b>Mask ONEPPS Result</b> | No Mask   |
| <b>Mask MTIE</b>          | G.8273.2 T-BC Class B Time Holdover<br>Const. Temp. |
| <b>Mask MTIE Result</b>   | <b>Pass</b>   |

1. Settling time = 1500s.


## 7.1 ONEPPS Analysis

|                               |          |
|-------------------------------|----------|
| <b>Offset Removal Applied</b> | Off      |
| <b>Zero Offset</b>            | -3.803ns |

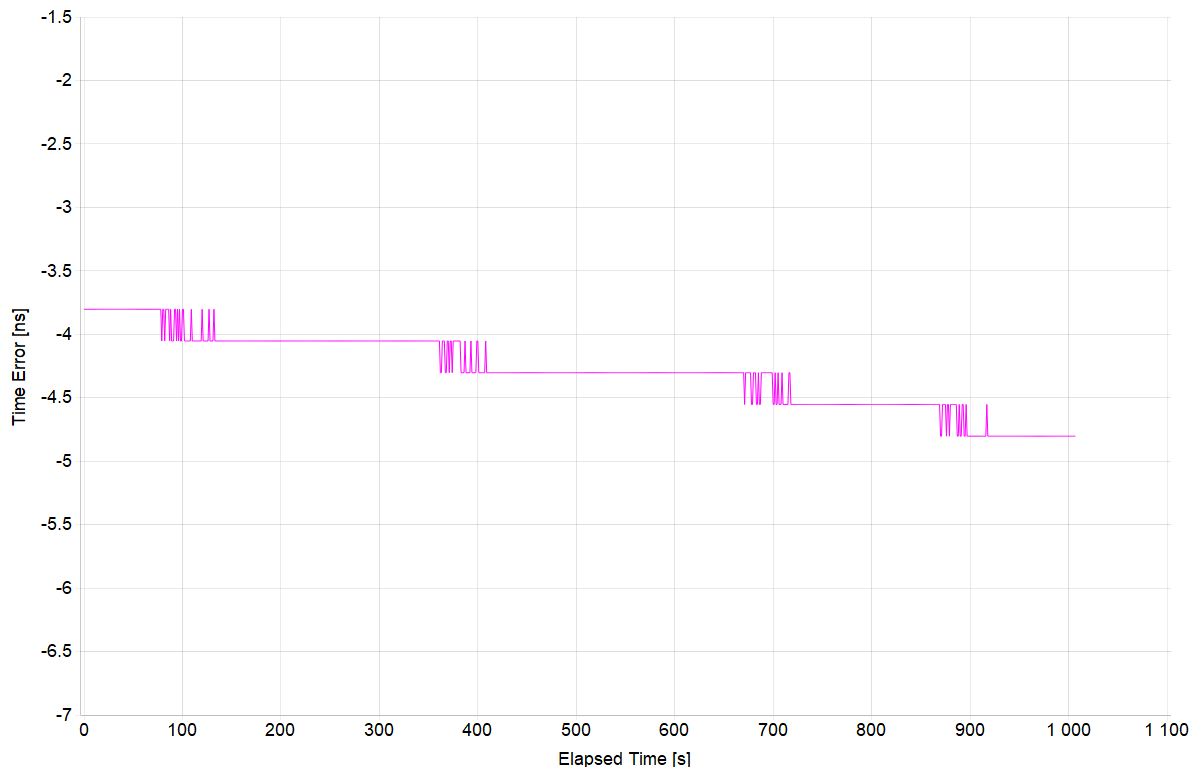

|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | -4.291 |
| <b>Min [ns]</b>     | -4.803 |
| <b>Max [ns]</b>     | -3.803 |
| <b>Max-Min [ns]</b> | 1      |

## 7.2 MTIE Analysis

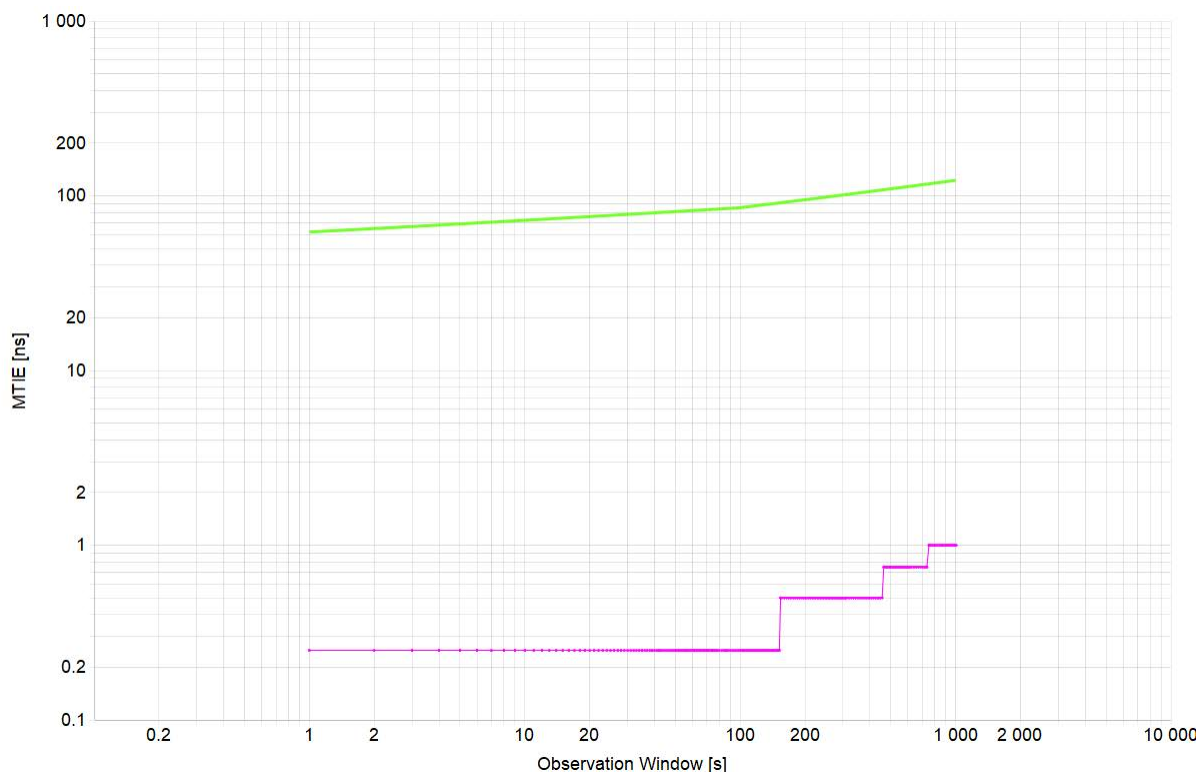

|                     |      |
|---------------------|------|
| <b>Min [ns]</b>     | 0.25 |
| <b>Max [ns]</b>     | 1    |
| <b>Max-Min [ns]</b> | 0.75 |




## 8. G.8273.2: Holdover – PTP

|                               |                        |
|-------------------------------|------------------------|
| <b>Test Description</b>       | Holdover – PTP         |
| <b>Report Date</b>            | 23-02-10_14-57-59      |
| <b>Packet Rate (pkt/s)</b>    | 16                     |
| <b>Beginning of Test</b>      | 2023-02-08 10:39:11 AM |
| <b>Test Duration</b>          | 00:16:48               |
| <b>Time to Phase Lock (s)</b> | 23                     |

|                              |   |
|------------------------------|---|
| <b>All Mask Results</b>      | <b>Pass</b>   |
| <b>Mask TIMEERROR</b>        | -   |
| <b>Mask TIMEERROR Result</b> | No Mask   |
| <b>Mask DTE</b>              | -   |
| <b>Mask DTE Result</b>       | No Mask   |
| <b>Mask DTEMTIE</b>          | G.8273.2 T-BC Class B Time Holdover<br>Const. Temp. |
| <b>Mask DTEMTIE Result</b>   | <b>Pass</b>   |


1. Settling time = 1500s.

## 8.1 TIMEERROR Analysis

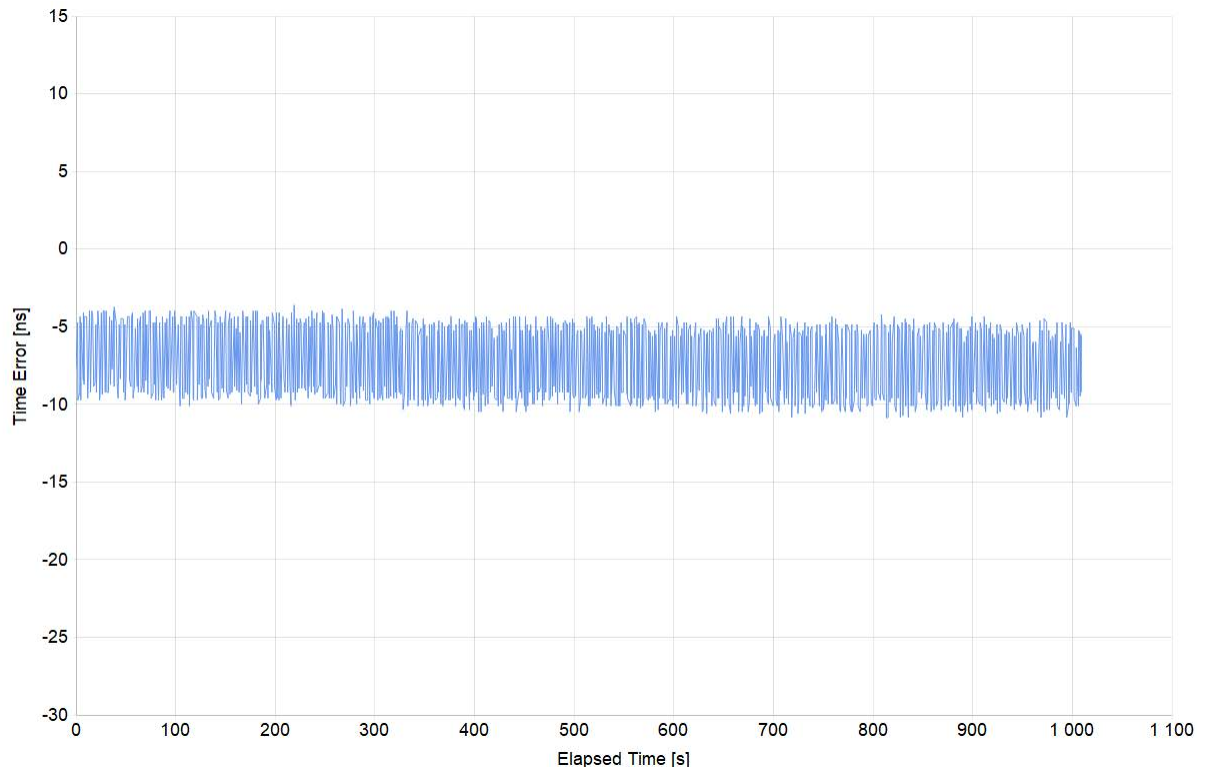


|                   |         |
|-------------------|---------|
| <b>Pk-Pk [ns]</b> | 7.25    |
| <b>Mean [ns]</b>  | -7.256  |
| <b>Min [ns]</b>   | -10.857 |
| <b>Max [ns]</b>   | -3.607  |

## 8.2 DTE Analysis

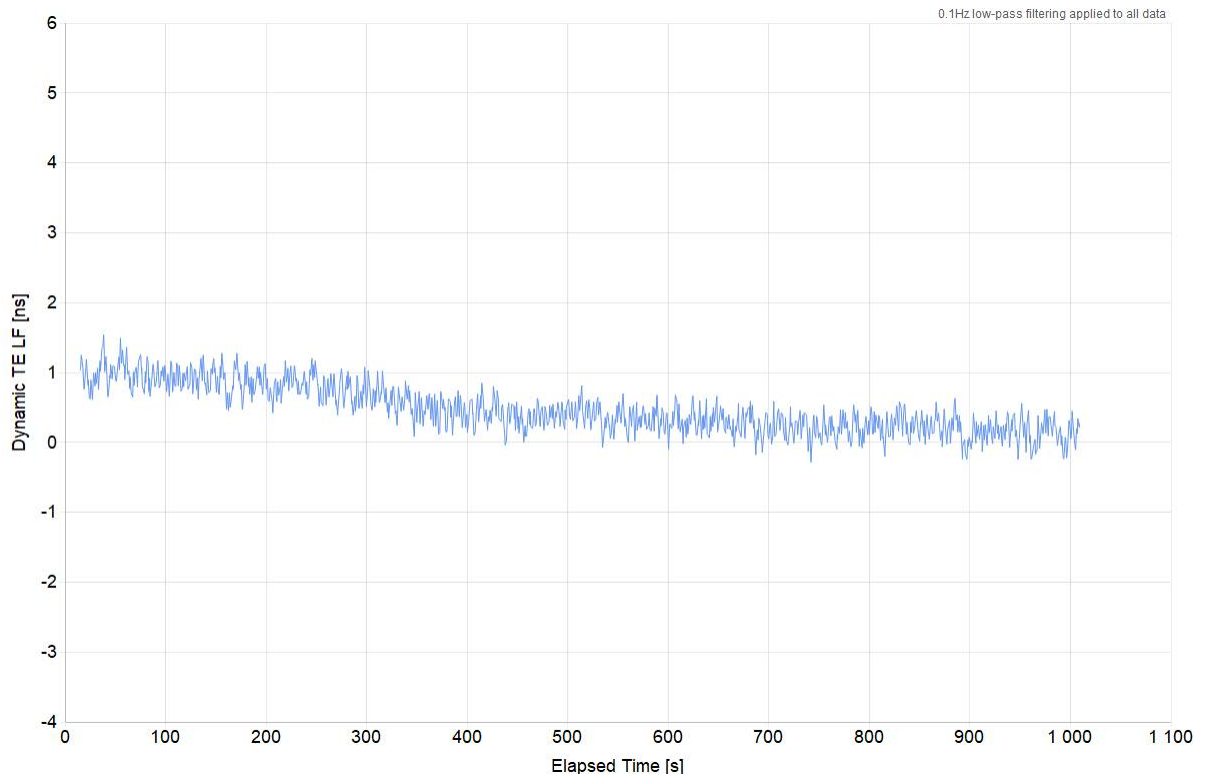

|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 0.47   |
| <b>Min [ns]</b>     | -0.285 |
| <b>Max [ns]</b>     | 1.54   |
| <b>Max-Min [ns]</b> | 1.825  |

### 8.3 DTEMTIE Analysis

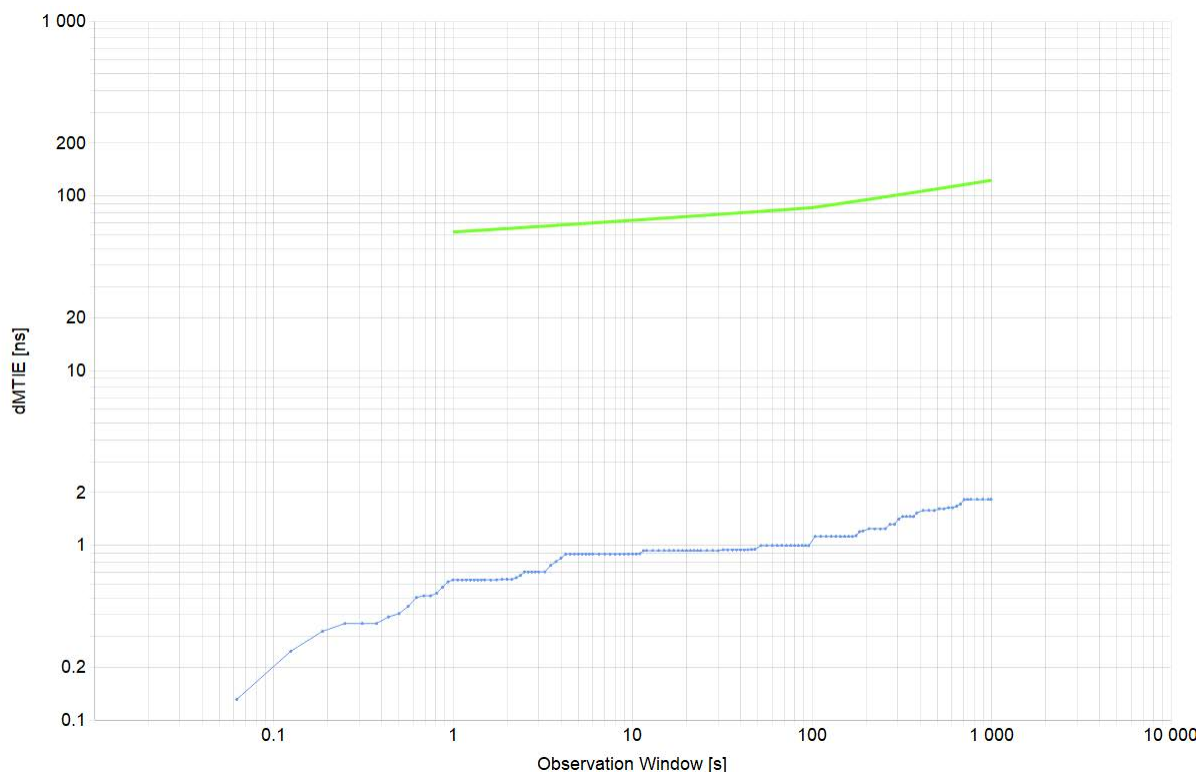

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.131 |
| <b>Max [ns]</b>     | 1.825 |
| <b>Max-Min [ns]</b> | 1.694 |

## 9. G.8273.2: Holdover – No SyncE – 1PPS

|                               |                            |
|-------------------------------|----------------------------|
| <b>Test Description</b>       | Holdover – No SyncE – 1PPS |
| <b>Report Date</b>            | 23-02-10_14-57-59          |
| <b>Packet Rate (pkt/s)</b>    | 16                         |
| <b>Beginning of Test</b>      | 2023-02-08 11:24:42 AM     |
| <b>Test Duration</b>          | 00:16:46                   |
| <b>Time to Phase Lock (s)</b> | 24                         |


|                           |   |
|---------------------------|---|
| <b>All Mask Results</b>   | <b>Pass</b>   |
| <b>Mask ONEPPS</b>        | -   |
| <b>Mask ONEPPS Result</b> | No Mask   |
| <b>Mask MTIE</b>          | G.8273.2 T-BC Class B Time Holdover<br>Const. Temp. |
| <b>Mask MTIE Result</b>   | <b>Pass</b>   |

1. Settling time = 1500s.
2. SyncE was disabled using a parameter in the PCM4L Json file to set the SyncE clock category below the desired threshold:  

```
physicalPllClockCategory = 4,  
physicalPllClockCategoryThreshold = 1,
```


## 9.1 ONEPPS Analysis

|                        |         |
|------------------------|---------|
| Offset Removal Applied | Off     |
| Zero Offset            | 9.697ns |

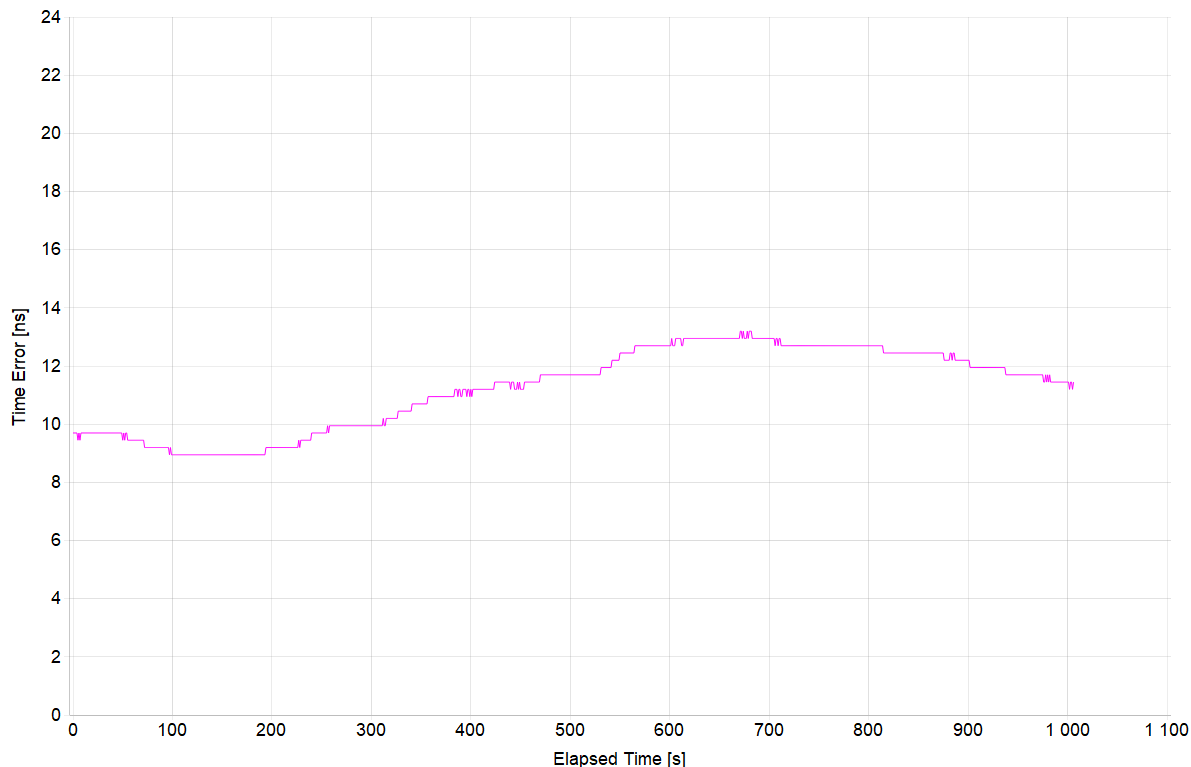

|              |        |
|--------------|--------|
| Mean [ns]    | 11.225 |
| Min [ns]     | 8.947  |
| Max [ns]     | 13.197 |
| Max-Min [ns] | 4.25   |

## 9.2 MTIE Analysis

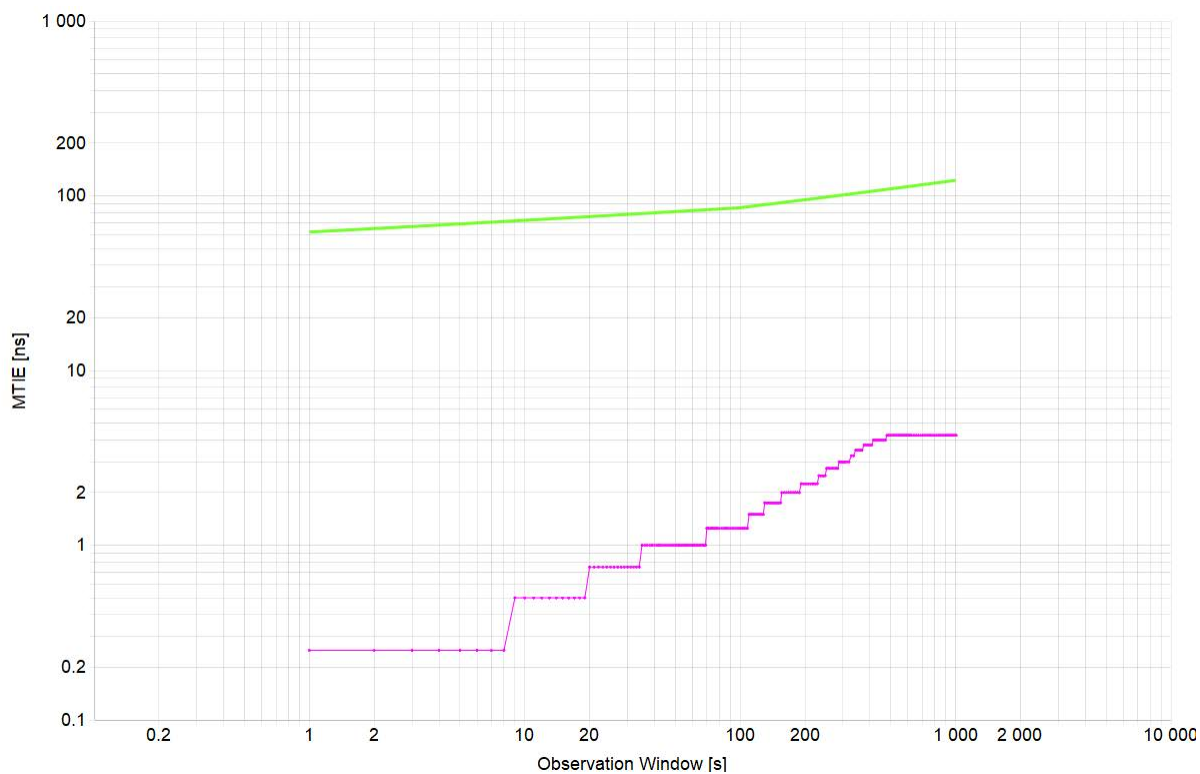

|                     |      |
|---------------------|------|
| <b>Min [ns]</b>     | 0.25 |
| <b>Max [ns]</b>     | 4.25 |
| <b>Max-Min [ns]</b> | 4    |

## 10. G.8273.2: Holdover – No SyncE – PTP


|                               |                           |
|-------------------------------|---------------------------|
| <b>Test Description</b>       | Holdover – No SyncE – PTP |
| <b>Report Date</b>            | 23-02-10_14-57-59         |
| <b>Packet Rate (pkt/s)</b>    | 16                        |
| <b>Beginning of Test</b>      | 2023-02-08 11:24:42 AM    |
| <b>Test Duration</b>          | 00:16:48                  |
| <b>Time to Phase Lock (s)</b> | 24                        |

|                              |   |
|------------------------------|---|
| <b>All Mask Results</b>      | <b>Pass</b>   |
| <b>Mask TIMEERROR</b>        | -   |
| <b>Mask TIMEERROR Result</b> | No Mask   |
| <b>Mask DTE</b>              | -   |
| <b>Mask DTE Result</b>       | No Mask   |
| <b>Mask DTEMTIE</b>          | G.8273.2 T-BC Class B Time Holdover<br>Const. Temp. |
| <b>Mask DTEMTIE Result</b>   | <b>Pass</b>   |

1. Settling time = 1500s.
2. SyncE was disabled using a parameter in the PCM4L Json file to set the SyncE clock category below the desired threshold:  
physicalPllClockCategory = 4,  
physicalPllClockCategoryThreshold = 1,




## 10.1 TIMEERROR Analysis

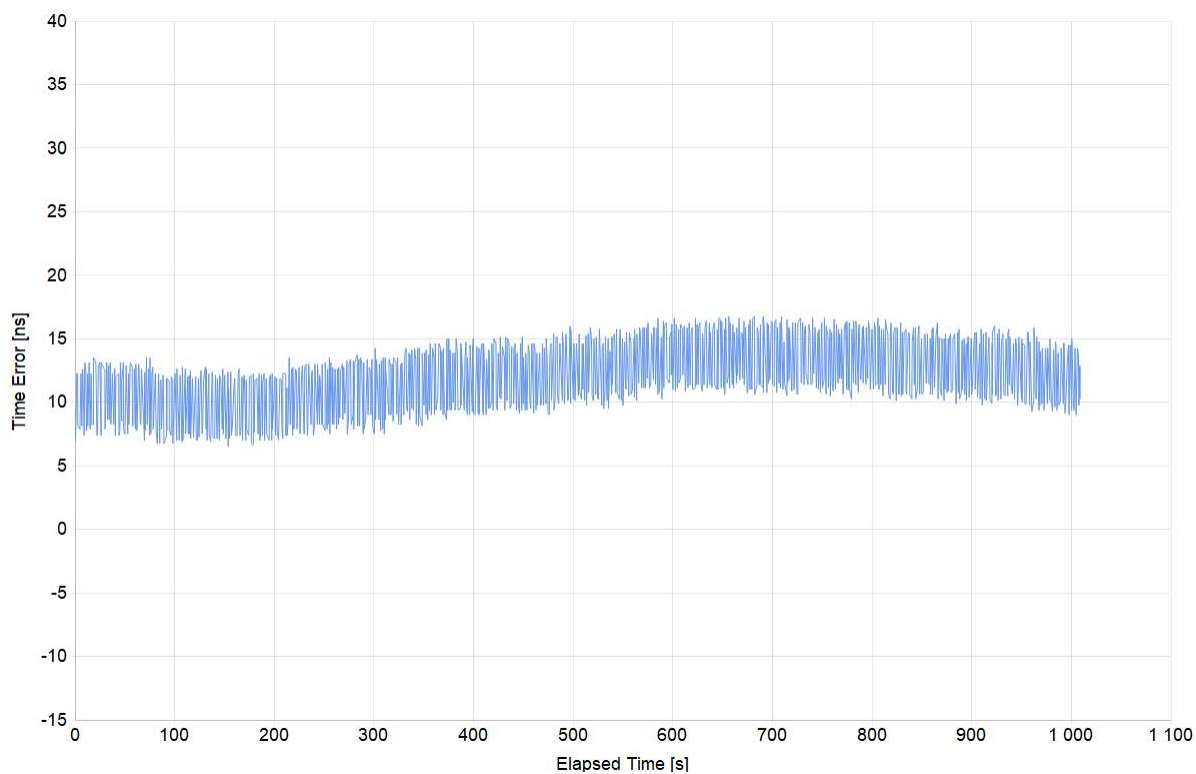


|                   |        |
|-------------------|--------|
| <b>Pk-Pk [ns]</b> | 10.25  |
| <b>Mean [ns]</b>  | 11.995 |
| <b>Min [ns]</b>   | 6.504  |
| <b>Max [ns]</b>   | 16.754 |

## 10.2 DTE Analysis

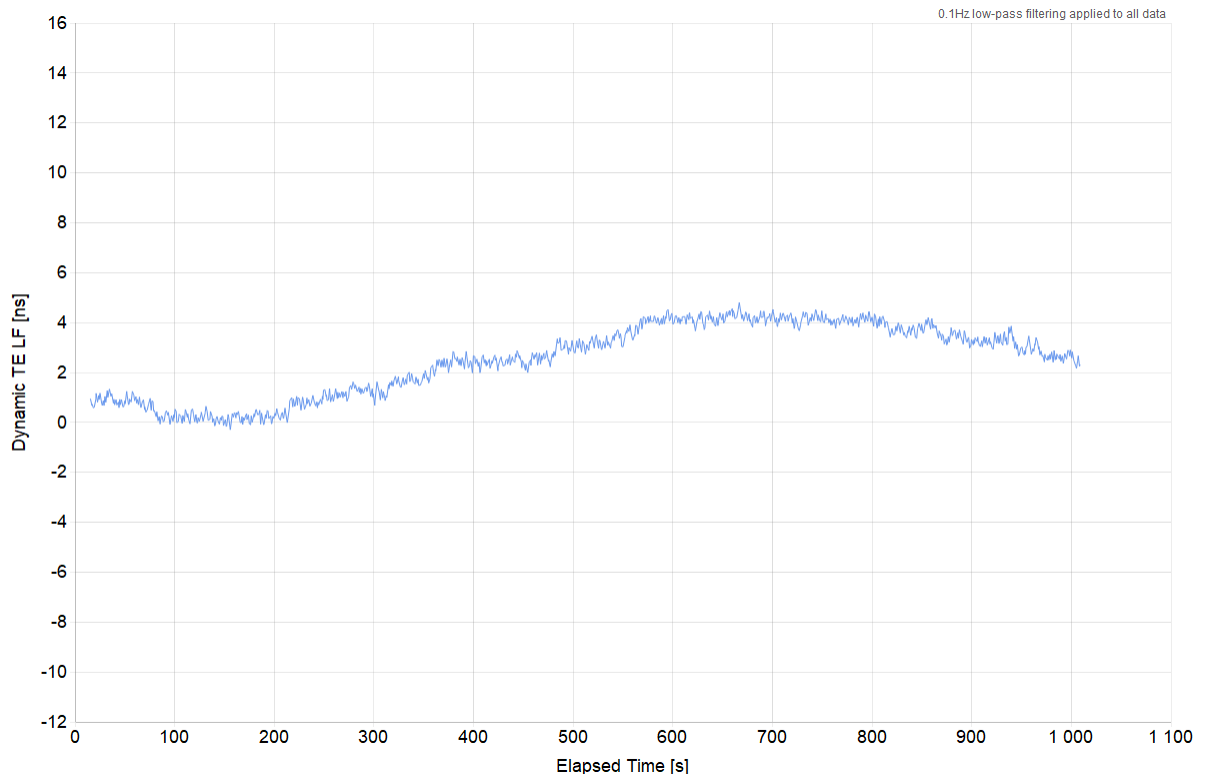

|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 2.515  |
| <b>Min [ns]</b>     | -0.293 |
| <b>Max [ns]</b>     | 4.801  |
| <b>Max-Min [ns]</b> | 5.094  |

### 10.3 DTEMTIE Analysis

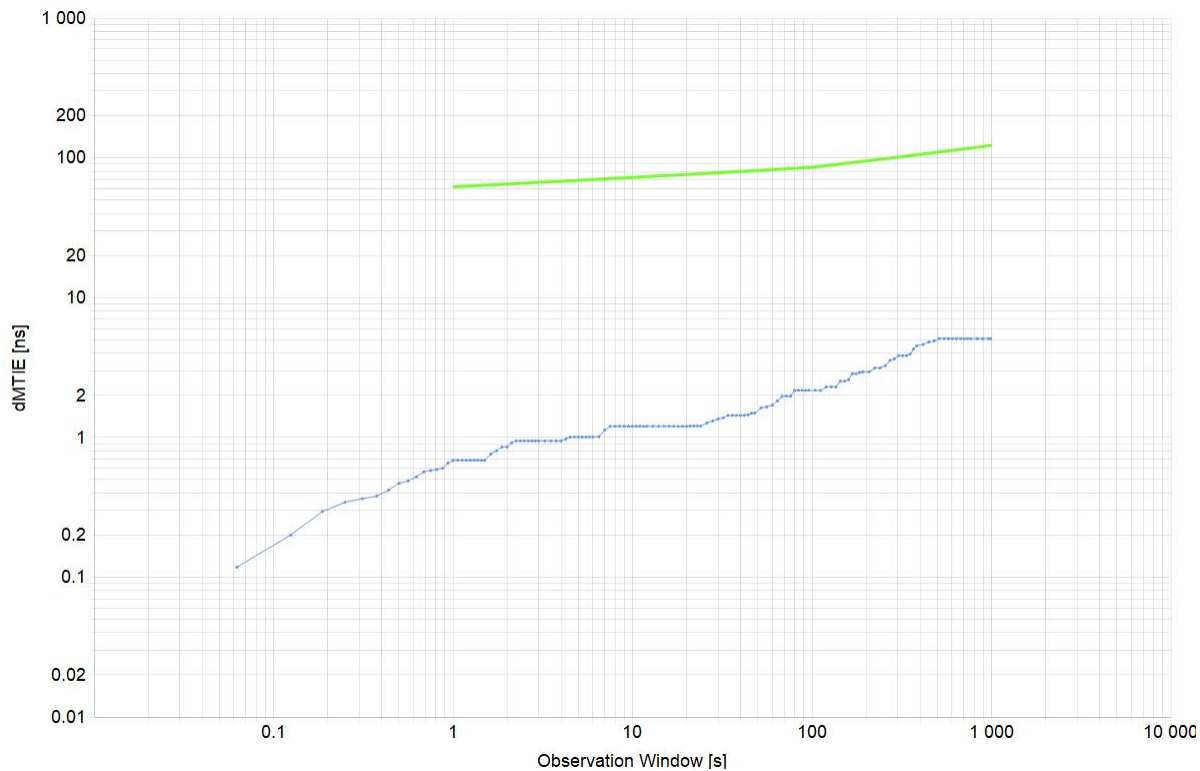

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.118 |
| <b>Max [ns]</b>     | 5.094 |
| <b>Max-Min [ns]</b> | 4.976 |


## 11. G.8273.2: PTP to 1PPS Noise Transfer

|                               |                            |
|-------------------------------|----------------------------|
| <b>Test Description</b>       | PTP to 1PPS Noise Transfer |
| <b>Report Date</b>            | 23-02-10_14-57-59          |
| <b>Packet Rate (pkt/s)</b>    | 16                         |
| <b>Beginning of Test</b>      | 2023-02-07 4:12:57 PM      |
| <b>Test Duration</b>          | 01:12:11                   |
| <b>Time to Phase Lock (s)</b> | 18                         |

|                                     |   |
|-------------------------------------|---|
| <b>All Mask Results</b>             | <b>Pass</b>                             |
| <b>Mask ONEPPS</b>                  | 0.32 $\mu$ s                            |
| <b>Mask ONEPPS Result</b>           | <b>Pass</b>                             |
| <b>Mask PTPNoiseTransfer</b>        | G.8273.2 Class A,B T-BCs Noise Transfer |
| <b>Mask PTPNoiseTransfer Result</b> | <b>Pass</b>                             |


### 11.1 ONEPPS Analysis

|                        |          |
|------------------------|----------|
| Offset Removal Applied | Off      |
| Zero Offset            | -0.303ns |

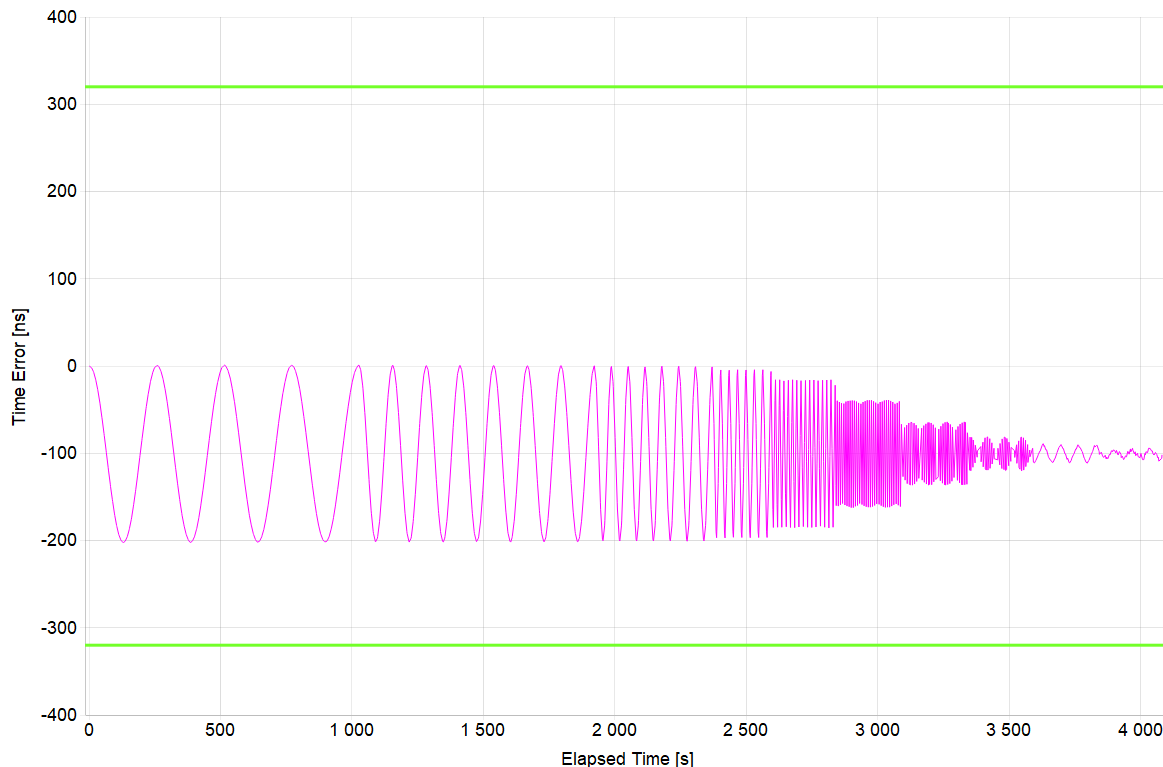

|              |          |
|--------------|----------|
| Mean [ns]    | -100.888 |
| Min [ns]     | -202.303 |
| Max [ns]     | 0.947    |
| Max-Min [ns] | 203.25   |

## 11.2 PTPNoiseTransfer Analysis

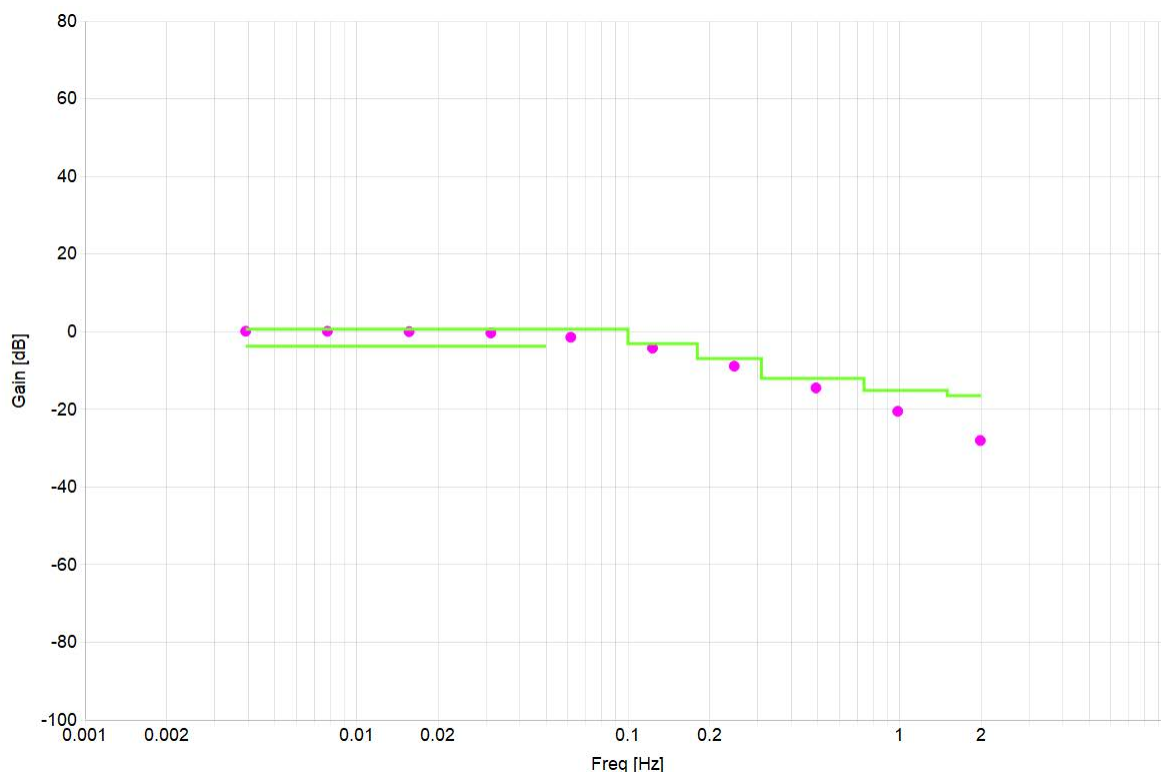


| Point # | Freq (Hz)  | Ampl (ns) | Duration (s) | Pk-Pk Output (ns) | Gain (dB) | Upper Pk-Pk Limit (ns) | Lower Pk-Pk Limit (ns) |
|---------|------------|-----------|--------------|-------------------|-----------|------------------------|------------------------|
| 1       | 0.00390625 | 200       | 1024.00      | 202.43            | 0.10      | 215                    | 130                    |
| 2       | 0.0078125  | 200       | 896.00       | 201.96            | 0.08      | 215                    | 130                    |
| 3       | 0.015625   | 200       | 448.00       | 200.03            | 0.00      | 215                    | 130                    |
| 4       | 0.03125    | 200       | 224.00       | 192.29            | -0.34     | 215                    | 130                    |
| 5       | 0.0615625  | 200       | 243.65       | 169.38            | -1.44     | 215                    | -                      |
| 6       | 0.123125   | 200       | 251.78       | 122.78            | -4.24     | 140                    | -                      |
| 7       | 0.24625    | 200       | 251.78       | 71.89             | -8.89     | 90                     | -                      |
| 8       | 0.4925     | 200       | 249.75       | 37.68             | -14.50    | 50                     | -                      |
| 9       | 0.985      | 200       | 249.75       | 18.84             | -20.52    | 35                     | -                      |
| 10      | 1.985      | 200       | 249.87       | 7.93              | -28.04    | 30                     | -                      |

## 12. G.8273.2: PTP to PTP Noise Transfer

|                               |                           |
|-------------------------------|---------------------------|
| <b>Test Description</b>       | PTP to PTP Noise Transfer |
| <b>Report Date</b>            | 23-02-10_15-26-39         |
| <b>Packet Rate (pkt/s)</b>    | 16                        |
| <b>Beginning of Test</b>      | 2023-02-07 4:12:57 PM     |
| <b>Test Duration</b>          | 01:12:13                  |
| <b>Time to Phase Lock (s)</b> | 18                        |

|                                     |   |
|-------------------------------------|---|
| <b>All Mask Results</b>             | <b>Pass</b>                             |
| <b>Mask TIMEERROR</b>               | 0.32 $\mu$ s                            |
| <b>Mask TIMEERROR Result</b>        | <b>Pass</b>                             |
| <b>Mask PTPNoiseTransfer</b>        | G.8273.2 Class A,B T-BCs Noise Transfer |
| <b>Mask PTPNoiseTransfer Result</b> | <b>Pass</b>                             |


## 12.1 TIMEERROR Analysis

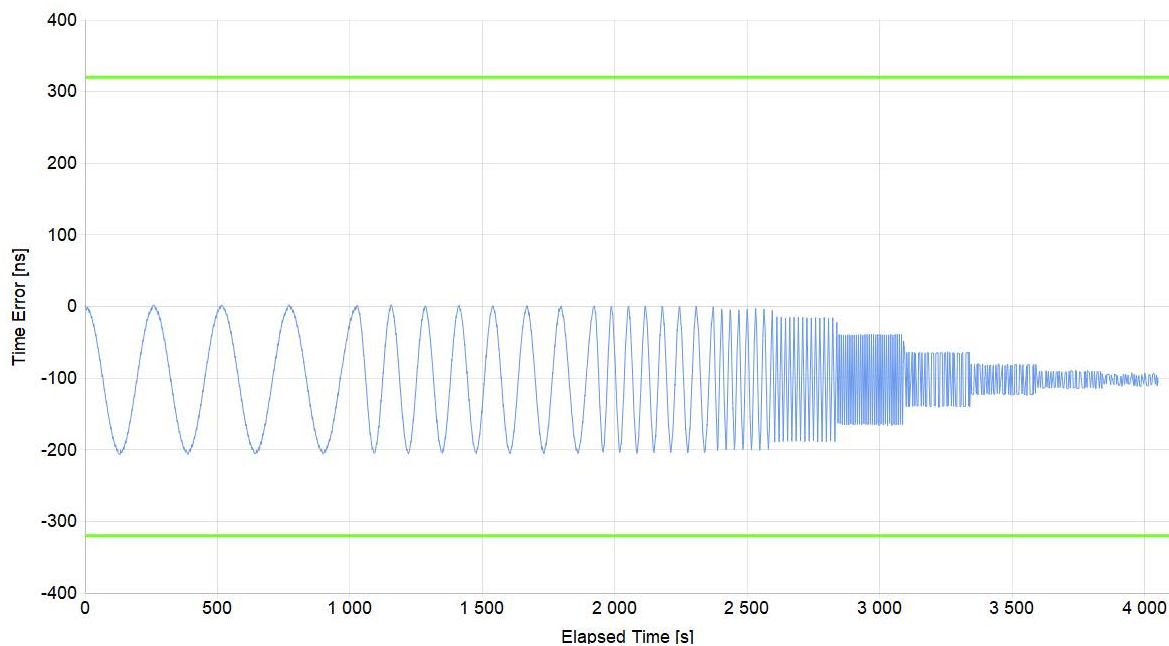

|                   |          |
|-------------------|----------|
| <b>Pk-Pk [ns]</b> | 209.375  |
| <b>Mean [ns]</b>  | -102.315 |
| <b>Min [ns]</b>   | -206.871 |
| <b>Max [ns]</b>   | 2.504    |



## 12.2 PTPNoiseTransfer Analysis

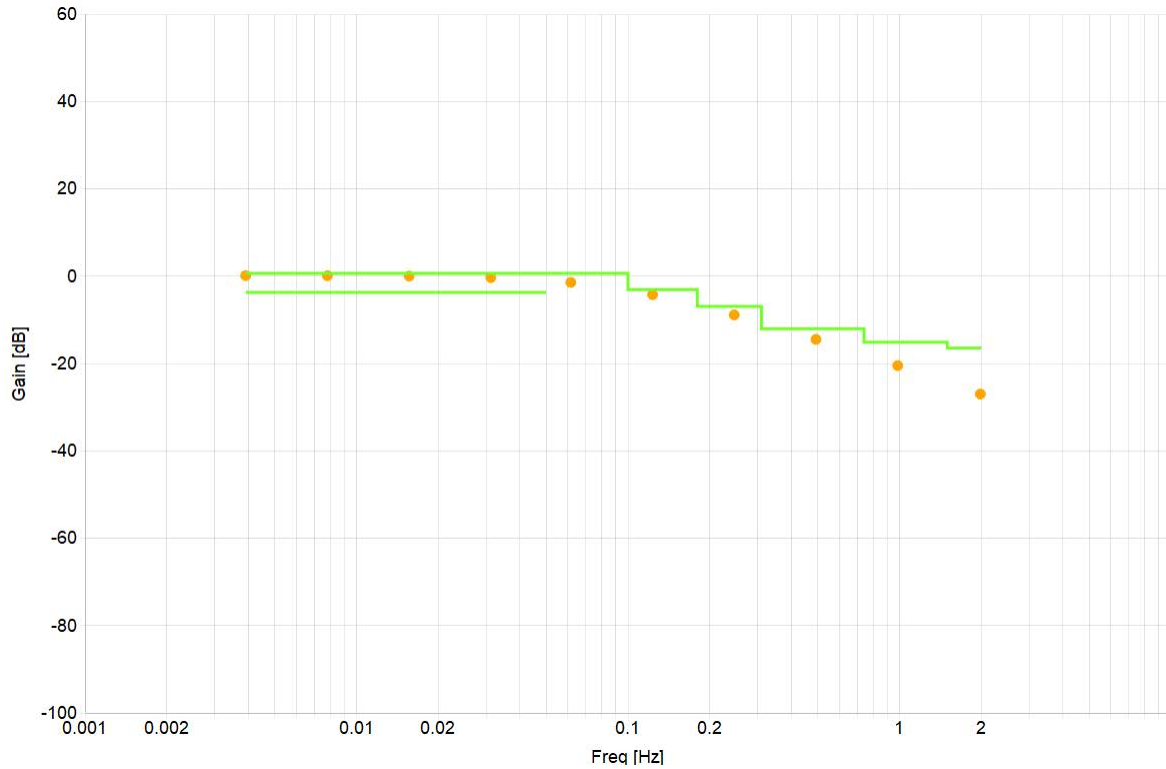

| Point # | Freq (Hz)  | Ampl (ns) | Duration (s) | Pk-Pk Output (ns) | Gain (dB) | Upper Pk-Pk Limit (ns) | Lower Pk-Pk Limit (ns) |
|---------|------------|-----------|--------------|-------------------|-----------|------------------------|------------------------|
| 1       | 0.00390625 | 200       | 1024.00      | 202.42            | 0.10      | 215                    | 130                    |
| 2       | 0.0078125  | 200       | 896.00       | 202.01            | 0.09      | 215                    | 130                    |
| 3       | 0.015625   | 200       | 448.00       | 200.08            | 0.00      | 215                    | 130                    |
| 4       | 0.03125    | 200       | 224.00       | 192.15            | -0.35     | 215                    | 130                    |
| 5       | 0.0615625  | 200       | 243.65       | 169.20            | -1.45     | 215                    | -                      |
| 6       | 0.123125   | 200       | 251.78       | 122.78            | -4.24     | 140                    | -                      |
| 7       | 0.24625    | 200       | 251.78       | 71.95             | -8.88     | 90                     | -                      |
| 8       | 0.4925     | 200       | 249.75       | 37.76             | -14.48    | 50                     | -                      |
| 9       | 0.985      | 200       | 249.75       | 18.92             | -20.48    | 35                     | -                      |
| 10      | 1.985      | 200       | 249.87       | 8.93              | -27.00    | 30                     | -                      |


### 13. G.8273.2: SyncE to 1PPS Noise Transfer

|                               |                              |
|-------------------------------|------------------------------|
| <b>Test Description</b>       | SyncE to 1PPS Noise Transfer |
| <b>Report Date</b>            | 23-02-10_15-40-56            |
| <b>Packet Rate (pkt/s)</b>    | 16                           |
| <b>Beginning of Test</b>      | 2023-02-07 2:19:48 PM        |
| <b>Test Duration</b>          | 01:40:02                     |
| <b>Time to Phase Lock (s)</b> | 20                           |

|                           |              |
|---------------------------|--------------|
| <b>All Mask Results</b>   | <b>Pass</b>  |
| <b>Mask ONEPPS</b>        | 0.32 $\mu$ s |
| <b>Mask ONEPPS Result</b> | <b>Pass</b>  |


### 13.1 ONEPPS Analysis

|                               |         |
|-------------------------------|---------|
| <b>Offset Removal Applied</b> | Off     |
| <b>Zero Offset</b>            | 4.697ns |

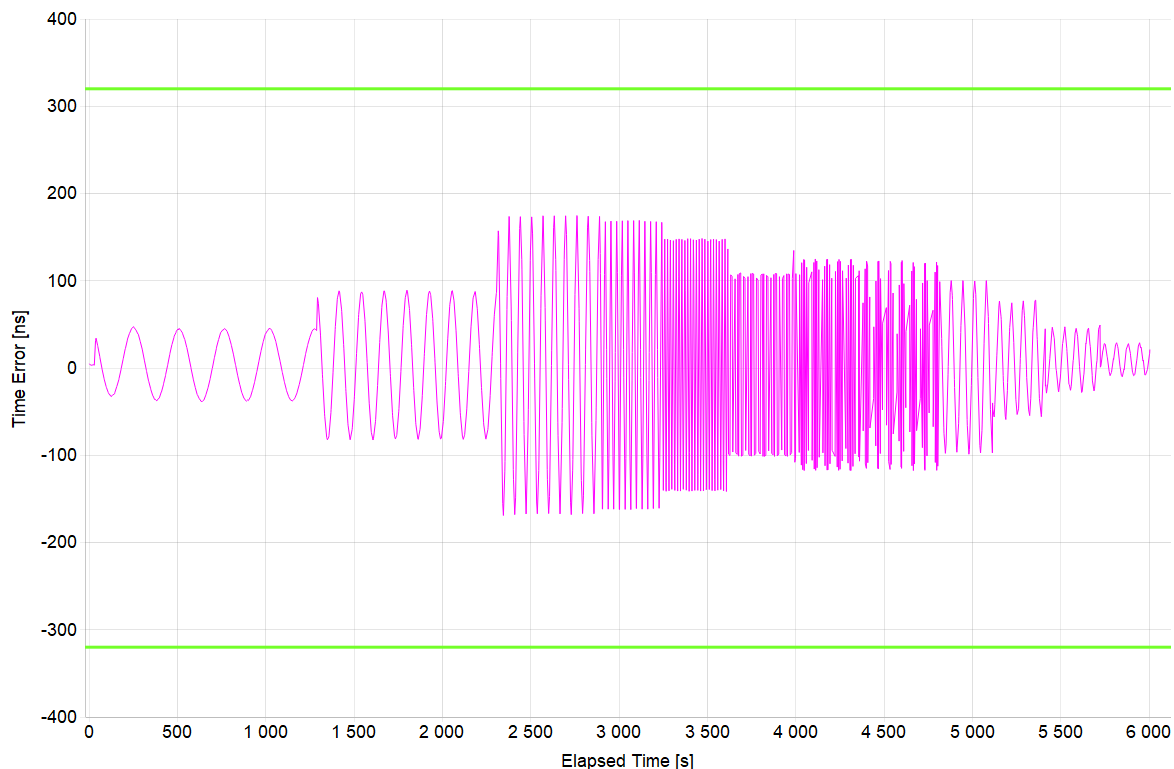

|                     |          |
|---------------------|----------|
| <b>Mean [ns]</b>    | 4.228    |
| <b>Min [ns]</b>     | -169.053 |
| <b>Max [ns]</b>     | 174.697  |
| <b>Max-Min [ns]</b> | 343.75   |

### 13.2 SyncNoiseTransfer Analysis

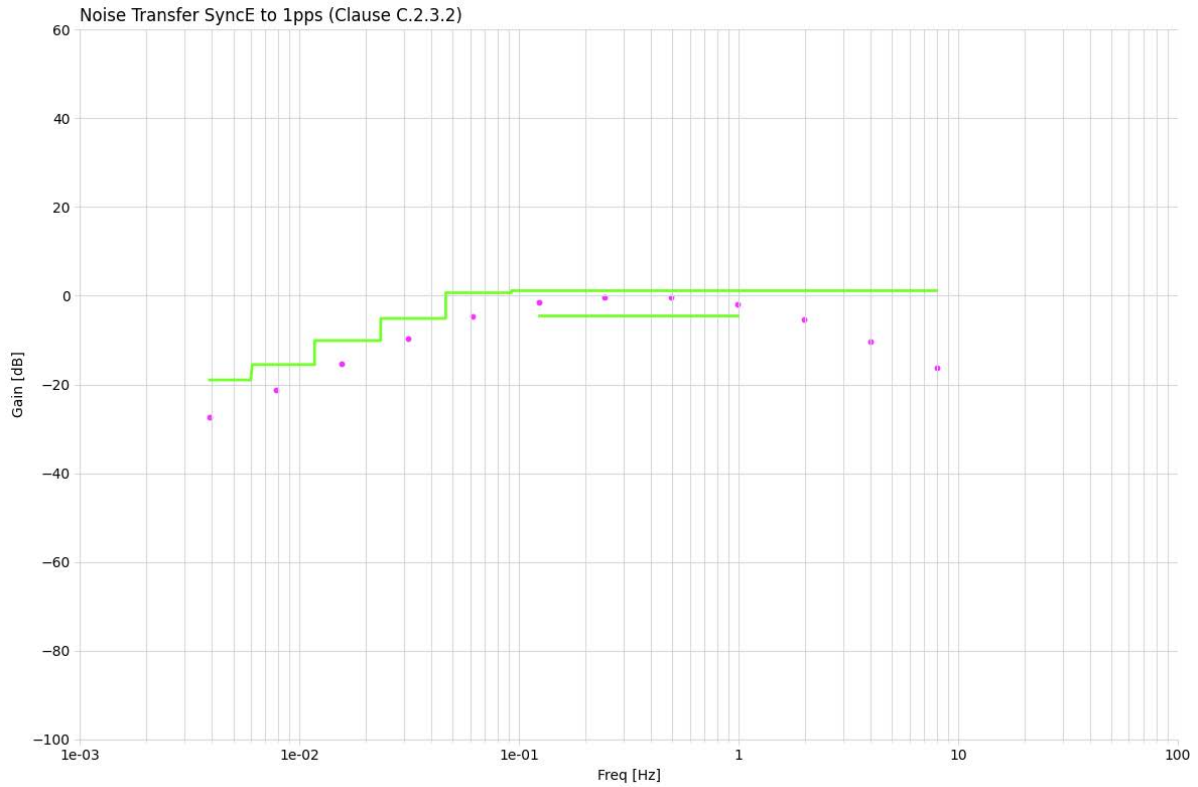

| Point # | Freq (Hz) | Ampl (ns) | Duration (s) | Pk-Pk Output (ns) | Gain (dB) | Upper Pk-Pk Limit (ns) | Lower Pk-Pk Limit (ns) |
|---------|-----------|-----------|--------------|-------------------|-----------|------------------------|------------------------|
| 1       | 0.00391   | 2000      | 1023.02      | 85.75             | -27.35    | 225                    | -                      |
| 2       | 0.00781   | 2000      | 896.29       | 171.75            | -21.32    | 340                    | -                      |
| 3       | 0.01563   | 2000      | 447.86       | 342.75            | -15.32    | 630                    | -                      |
| 4       | 0.03125   | 1000      | 224.00       | 331.5             | -9.59     | 565                    | -                      |
| 5       | 0.06156   | 500       | 243.66       | 289.75            | -4.73     | 545                    | -                      |
| 6       | 0.12313   | 250       | 251.77       | 210.25            | -1.50     | 285                    | 150                    |
| 7       | 0.24625   | 250       | 251.78       | 242.5             | -0.26     | 285                    | 150                    |
| 8       | 0.4925    | 250       | 249.75       | 240.75            | -0.33     | 285                    | 150                    |
| 9       | 0.985     | 250       | 249.75       | 199.0             | -1.98     | 285                    | 150                    |
| 10      | 1.985     | 250       | 249.87       | 136.0             | -5.29     | 285                    | -                      |
| 11      | 3.985     | 250       | 249.94       | 75.25             | -10.43    | 285                    | -                      |
| 12      | 7.985     | 250       | 249.97       | 39.0              | -16.14    | 285                    | -                      |


## 14. G.8273.2: SyncE to PTP Noise Transfer

|                               |                             |
|-------------------------------|-----------------------------|
| <b>Test Description</b>       | SyncE to PTP Noise Transfer |
| <b>Report Date</b>            | 23-02-10_15-40-56           |
| <b>Packet Rate (pkt/s)</b>    | 16                          |
| <b>Beginning of Test</b>      | 2023-02-07 2:19:48 PM       |
| <b>Test Duration</b>          | 01:40:02                    |
| <b>Time to Phase Lock (s)</b> | 20                          |

|                           |             |
|---------------------------|-------------|
| <b>All Mask Results</b>   | <b>Pass</b> |
| <b>Mask ONEPPS</b>        | 0.32μs      |
| <b>Mask ONEPPS Result</b> | <b>Pass</b> |


## 14.1 ONEPPS Analysis

|                               |       |
|-------------------------------|-------|
| <b>Offset Removal Applied</b> | Off   |
| <b>Zero Offset</b>            | 1.137 |

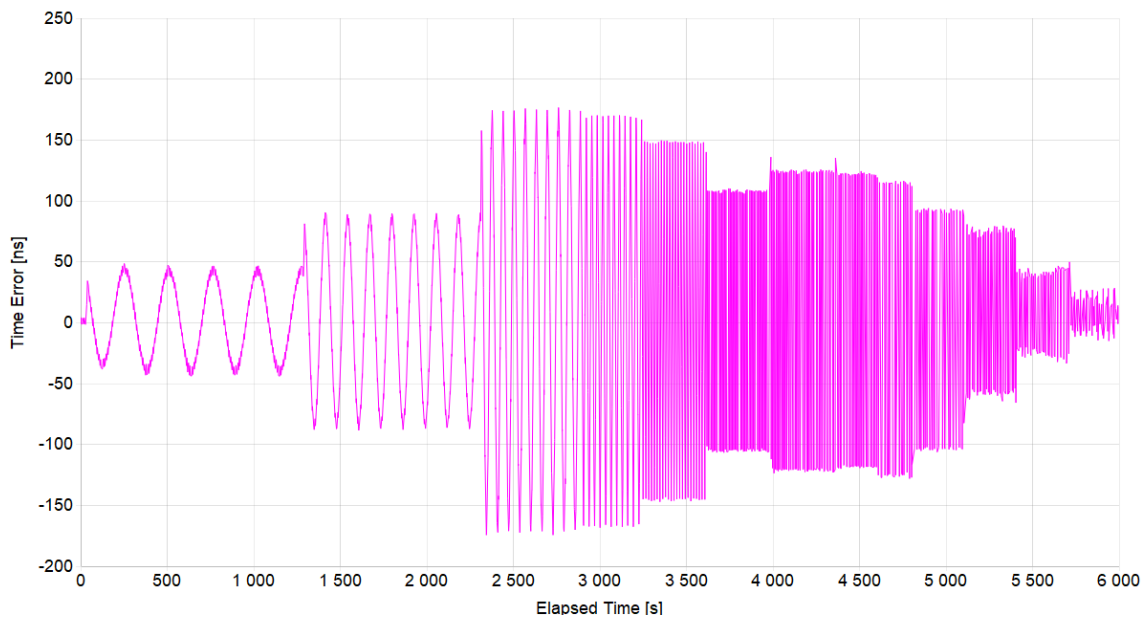

|                     |          |
|---------------------|----------|
| <b>Mean [ns]</b>    | 1.158    |
| <b>Min [ns]</b>     | -174.363 |
| <b>Max [ns]</b>     | 176.637  |
| <b>Max-Min [ns]</b> | 351      |

## 14.2 SyncNoiseTransfer Analysis

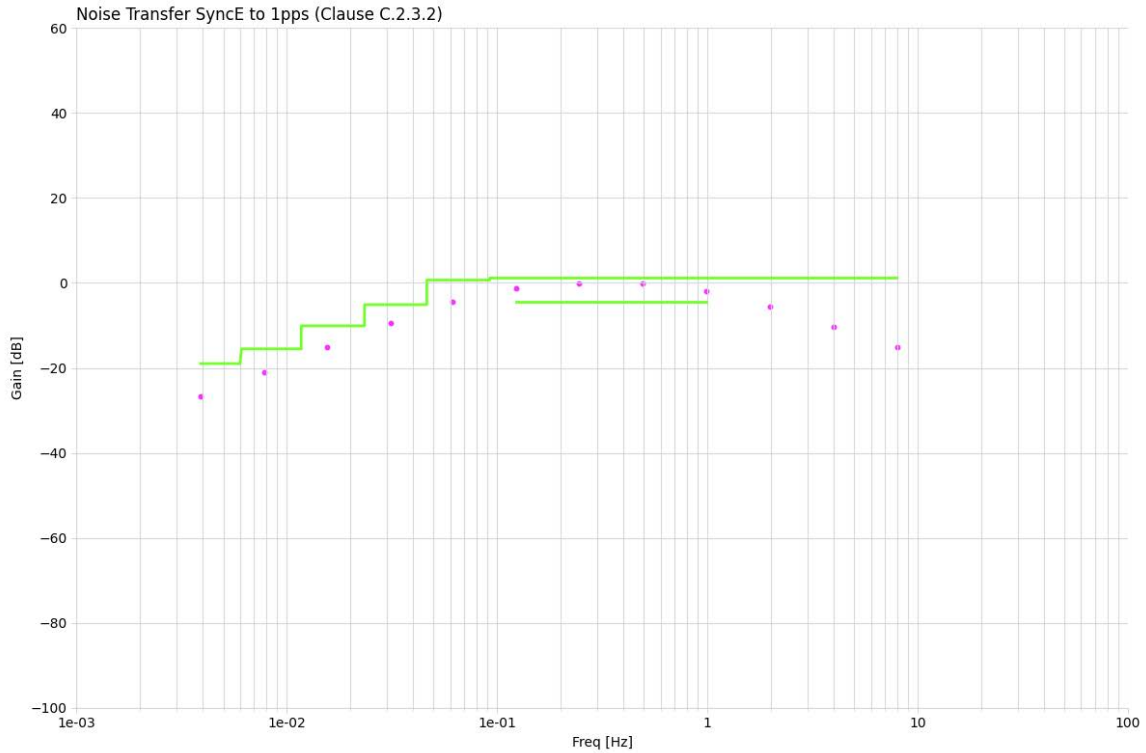

| Point # | Freq (Hz) | Ampl (ns) | Duration (s) | Pk-Pk Output (ns) | Gain (dB) | Upper Pk-Pk Limit (ns) | Lower Pk-Pk Limit (ns) |
|---------|-----------|-----------|--------------|-------------------|-----------|------------------------|------------------------|
| 1       | 0.00391   | 2000      | 1023.02      | 92.5              | -26.70    | 225                    | -                      |
| 2       | 0.00781   | 2000      | 896.29       | 179.0             | -20.96    | 340                    | -                      |
| 3       | 0.01563   | 2000      | 447.86       | 351.0             | -15.11    | 630                    | -                      |
| 4       | 0.03125   | 1000      | 224.00       | 338.63            | -9.41     | 565                    | -                      |
| 5       | 0.06156   | 500       | 243.66       | 296.75            | -4.53     | 545                    | -                      |
| 6       | 0.12313   | 250       | 251.77       | 217.0             | -1.22     | 285                    | 150                    |
| 7       | 0.24625   | 250       | 251.78       | 248.38            | -0.06     | 285                    | 150                    |
| 8       | 0.4925    | 250       | 249.75       | 243.75            | -0.22     | 285                    | 150                    |
| 9       | 0.985     | 250       | 249.75       | 200.25            | -1.93     | 285                    | 150                    |
| 10      | 1.985     | 250       | 249.87       | 132.75            | -5.50     | 285                    | -                      |
| 11      | 3.985     | 250       | 249.94       | 75.88             | -10.36    | 285                    | -                      |
| 12      | 7.985     | 250       | 249.97       | 43.5              | -15.18    | 285                    | -                      |

## 15. G.8273.2: Noise Tolerance – 1PPS

|                               |                        |
|-------------------------------|------------------------|
| <b>Test Description</b>       | Noise Tolerance – 1PPS |
| <b>Report Date</b>            | 23-02-13_08-23-03      |
| <b>Packet Rate (pkt/s)</b>    | 16                     |
| <b>Beginning of Test</b>      | 2023-02-10 2:08:04 PM  |
| <b>Test Duration</b>          | 12:45:24               |
| <b>Time to Phase Lock (s)</b> | 20                     |


|                           |             |
|---------------------------|-------------|
| <b>All Mask Results</b>   | <b>Pass</b> |
| <b>Mask ONEPPS</b>        | -           |
| <b>Mask ONEPPS Result</b> | No Mask     |

1. Passing criteria for this test is tolerance of input noise on the SyncE and PTP sources while not causing any alarms, reference switching or holdover. No reference switching, holdover nor alarms occurred during this test.



### 15.1 ONEPPS Analysis

|                               |           |
|-------------------------------|-----------|
| <b>Offset Removal Applied</b> | Off       |
| <b>Zero Offset</b>            | 721.947ns |

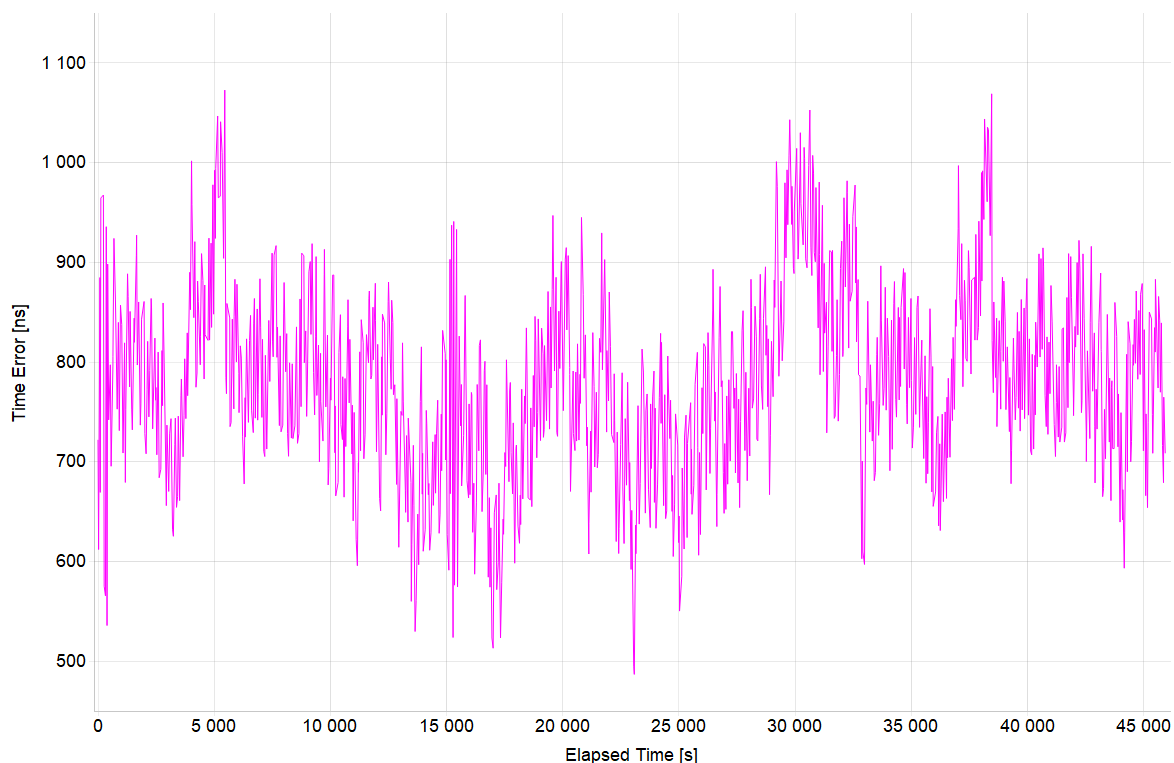

|                     |          |
|---------------------|----------|
| <b>Mean [ns]</b>    | 780.697  |
| <b>Min [ns]</b>     | 486.697  |
| <b>Max [ns]</b>     | 1072.697 |
| <b>Max-Min [ns]</b> | 586      |


## 16. G.8273.2: Noise Tolerance – PTP

|                               |                       |
|-------------------------------|-----------------------|
| <b>Test Description</b>       | Noise Tolerance – PTP |
| <b>Report Date</b>            | 23-02-13_08-23-03     |
| <b>Packet Rate (pkt/s)</b>    | 16                    |
| <b>Beginning of Test</b>      | 2023-02-10 2:08:04 PM |
| <b>Test Duration</b>          | 12:45:27              |
| <b>Time to Phase Lock (s)</b> | 20                    |

|                              |             |
|------------------------------|-------------|
| <b>All Mask Results</b>      | <b>Pass</b> |
| <b>Mask TIMEERROR</b>        | -           |
| <b>Mask TIMEERROR Result</b> | No Mask     |

1. Passing criteria for this test is tolerance of input noise on the SyncE and PTP sources while not causing any alarms, reference switching or holdover. No reference switching, holdover nor alarms occurred during this test.

## 16.1 TIMEERROR Analysis

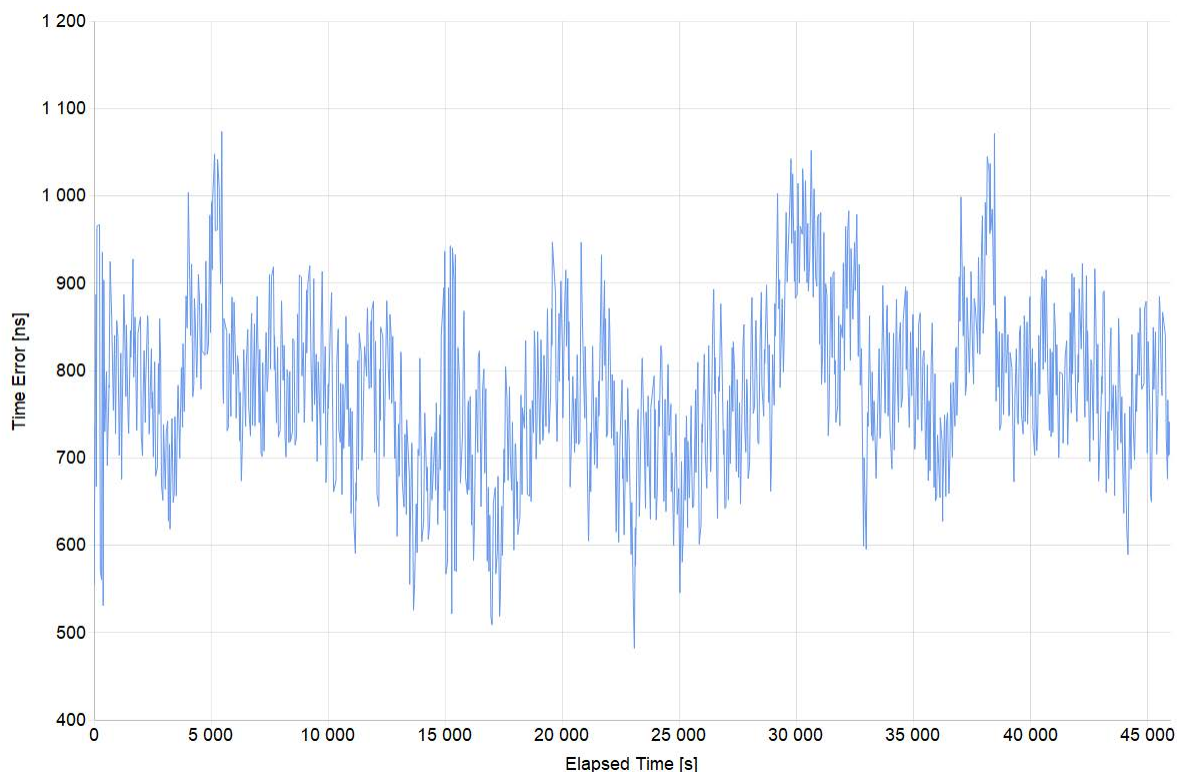

|                   |          |
|-------------------|----------|
| <b>Pk-Pk [ns]</b> | 591.375  |
| <b>Mean [ns]</b>  | 778.95   |
| <b>Min [ns]</b>   | 482.008  |
| <b>Max [ns]</b>   | 1073.382 |


## 17. G.8273.4 PTS: Noise Generation

|                               |                        |
|-------------------------------|------------------------|
| <b>Test Description</b>       | Noise Generation       |
| <b>Report Date</b>            | 23-02-10_15-40-56      |
| <b>Packet Rate (pkt/s)</b>    | 16                     |
| <b>Beginning of Test</b>      | 2023-02-09 10:21:33 PM |
| <b>Test Duration</b>          | 02:46:40               |
| <b>Time to Phase Lock (s)</b> | 70                     |

|                           |              |
|---------------------------|--------------|
| <b>All Mask Results</b>   | <b>Pass</b>  |
| <b>Mask ONEPPS</b>        | 1.35 $\mu$ s |
| <b>Mask ONEPPS Result</b> | <b>Pass</b>  |
| <b>Mask CTE</b>           | 0.02 $\mu$ s |
| <b>Mask CTE Result</b>    | <b>Pass</b>  |
| <b>Mask DTE</b>           | 0.2 $\mu$ s  |
| <b>Mask DTE Result</b>    | <b>Pass</b>  |
| <b>Mask DTEHF</b>         | -            |
| <b>Mask DTEHF Result</b>  | No Mask      |

## 17.1 ONEPPS Analysis


|                               |         |
|-------------------------------|---------|
| <b>Offset Removal Applied</b> | Off     |
| <b>Zero Offset</b>            | 0.697ns |

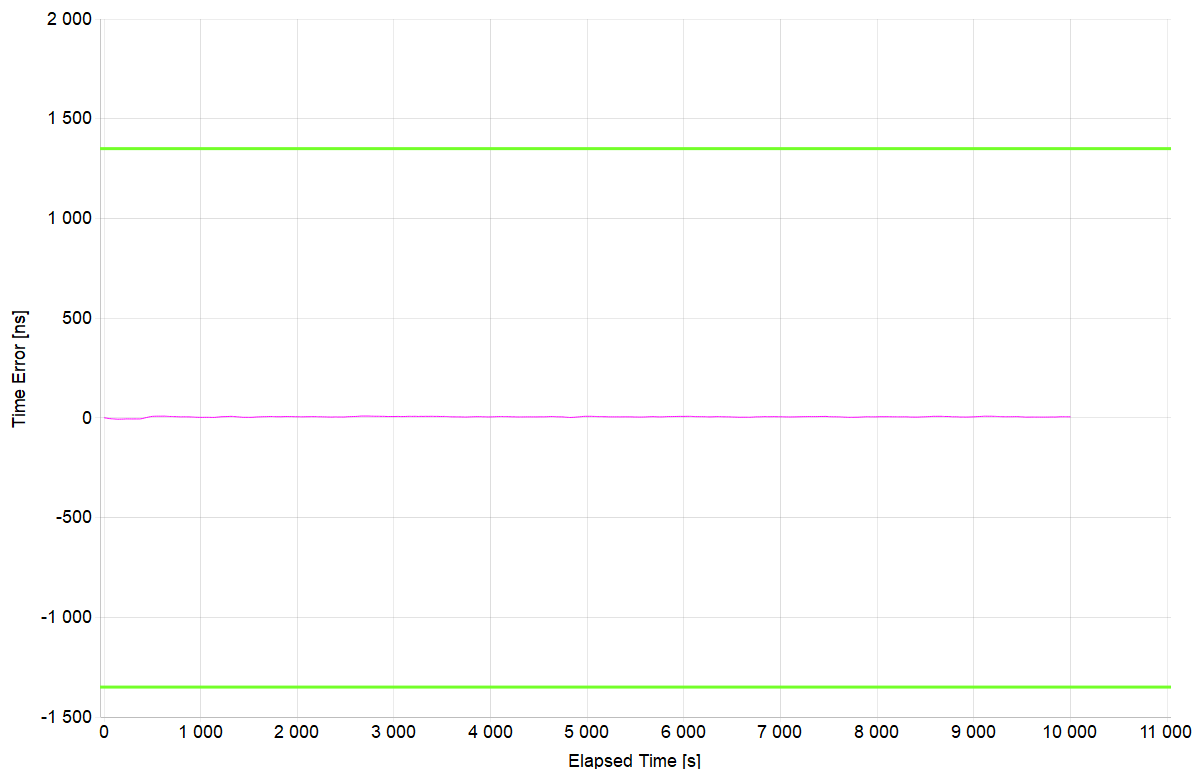

|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 5.023  |
| <b>Min [ns]</b>     | -6.803 |
| <b>Max [ns]</b>     | 8.947  |
| <b>Max-Min [ns]</b> | 15.75  |


## 17.2 CTE Analysis

|                           |      |
|---------------------------|------|
| <b>Averaging Time (s)</b> | 1000 |
|---------------------------|------|

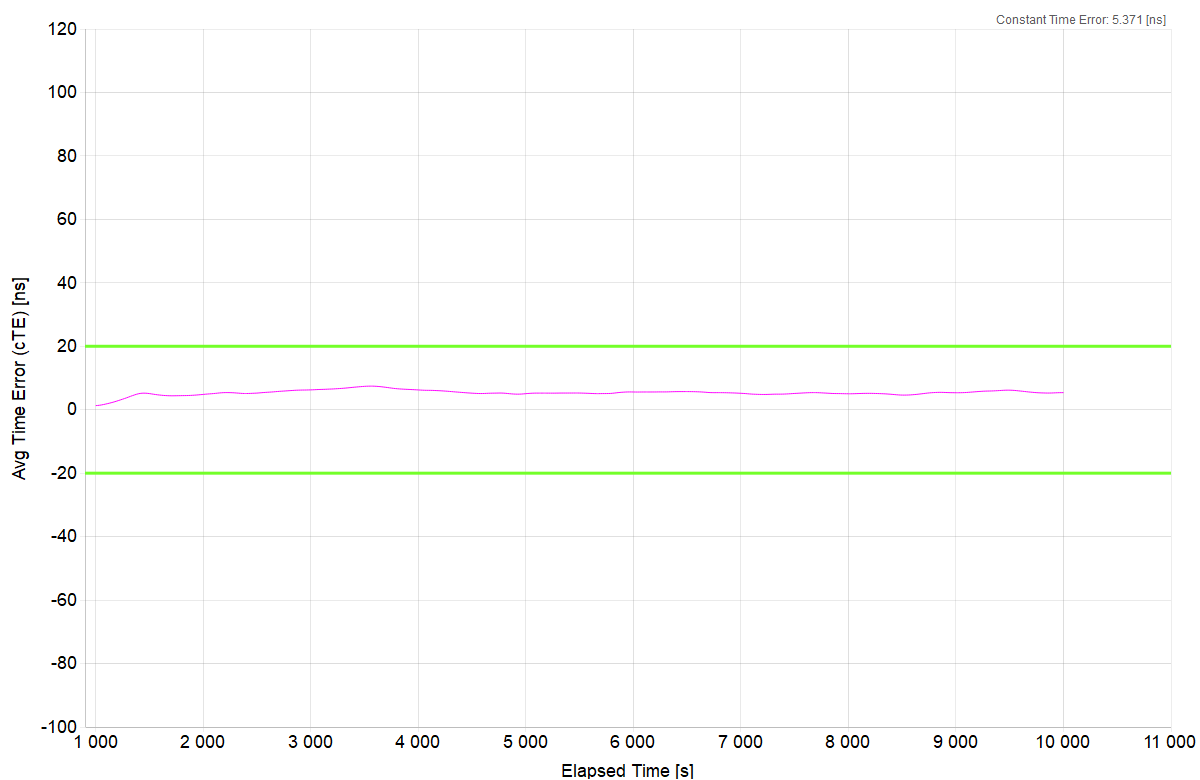


|                                 |       |
|---------------------------------|-------|
| <b>Constant Time Error [ns]</b> | 5.371 |
| <b>Min [ns]</b>                 | 1.299 |
| <b>Max [ns]</b>                 | 7.434 |
| <b>Max-Min [ns]</b>             | 6.135 |

### 17.3 DTE Analysis

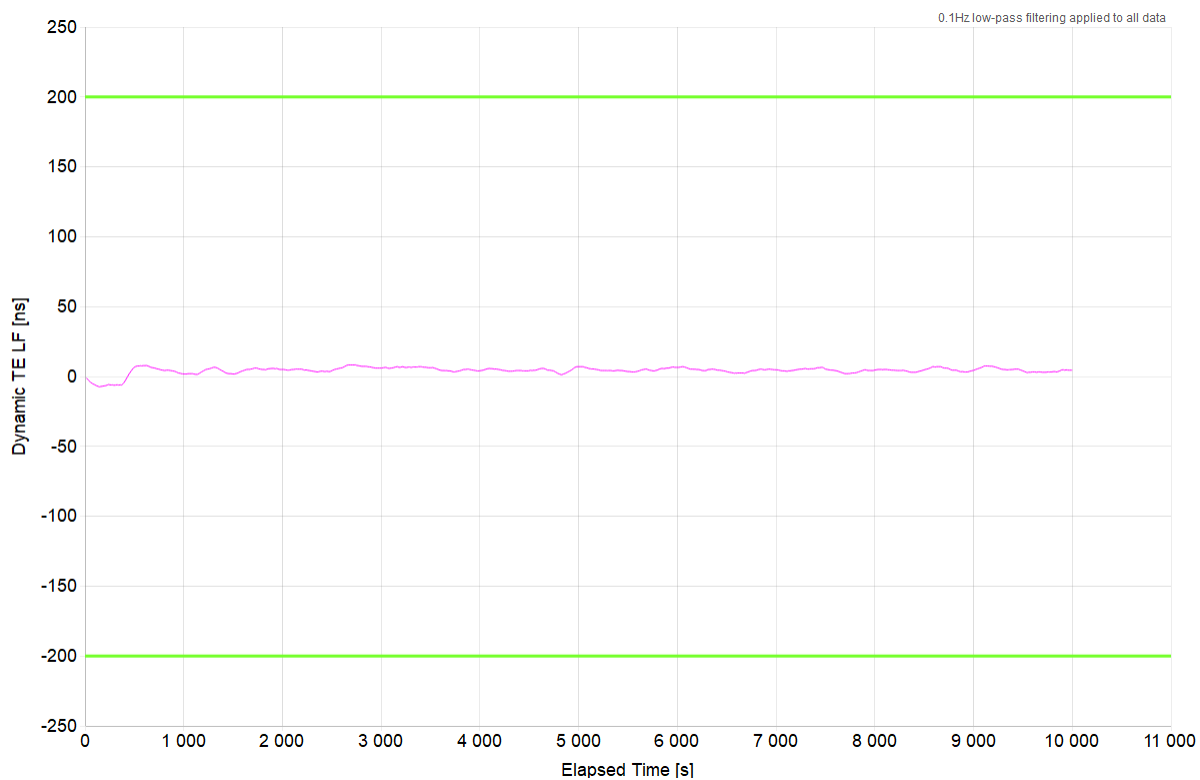

|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 4.332  |
| <b>Min [ns]</b>     | -7.434 |
| <b>Max [ns]</b>     | 8.25   |
| <b>Max-Min [ns]</b> | 15.684 |

## 17.4 DTEHF Analysis

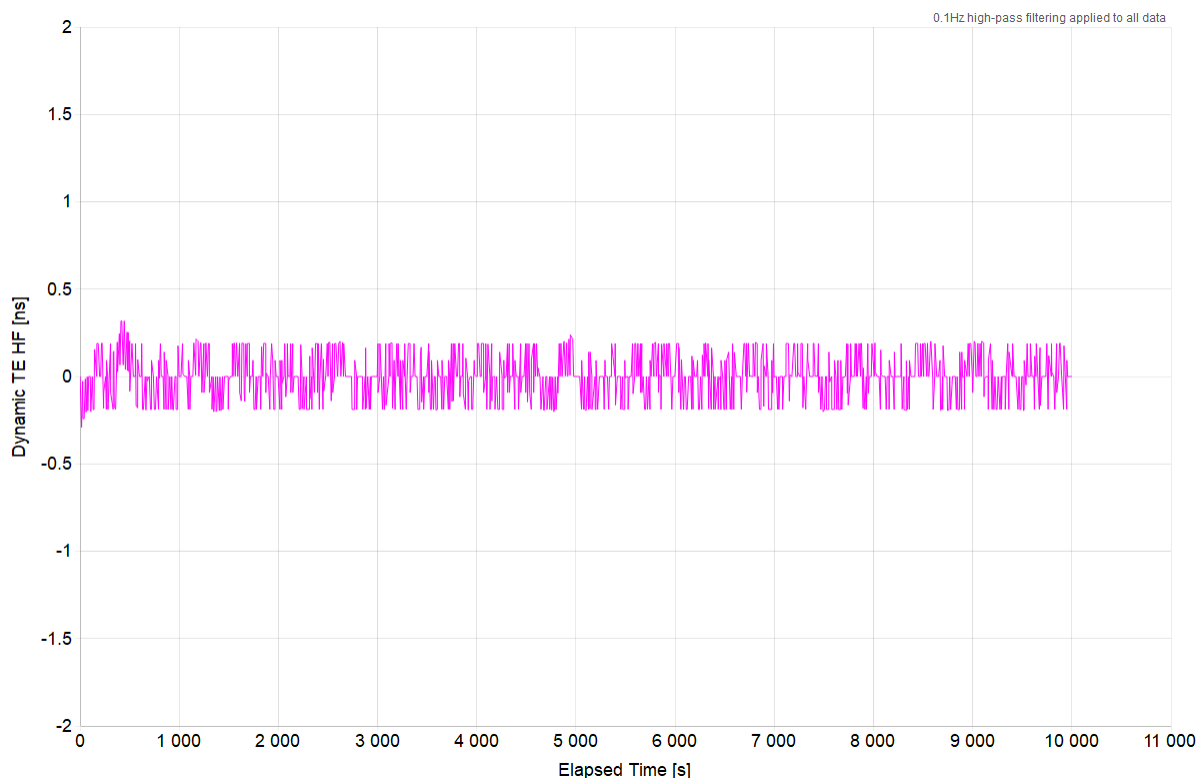

|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 0.001  |
| <b>Min [ns]</b>     | -0.292 |
| <b>Max [ns]</b>     | 0.318  |
| <b>Max-Min [ns]</b> | 0.61   |




## 18. G.8273.4 PTS: Holdover

|                               |                        |
|-------------------------------|------------------------|
| <b>Test Description</b>       | Holdover               |
| <b>Report Date</b>            | 23-02-10_15-40-56      |
| <b>Packet Rate (pkt/s)</b>    | 16                     |
| <b>Beginning of Test</b>      | 2023-02-09 10:21:33 PM |
| <b>Test Duration</b>          | 00:16:40               |
| <b>Time to Phase Lock (s)</b> | N/A                    |

|                         |  |
|-------------------------|--|
| <b>All Mask Results</b> | <b>Pass</b>  |
| <b>Mask TIE</b>         | G.8273.4 PTS Holdover (Oscillator) Const.<br>Temp. |
| <b>Mask TIE Result</b>  | <b>Pass</b>  |

1. This test is a continuation of the previous Noise Generation test. This allows for an appropriate amount of settling time before collecting holdover data (10 000s). The results are split because holdover requires a different mask than noise generation.

## 18.1 TIE Analysis

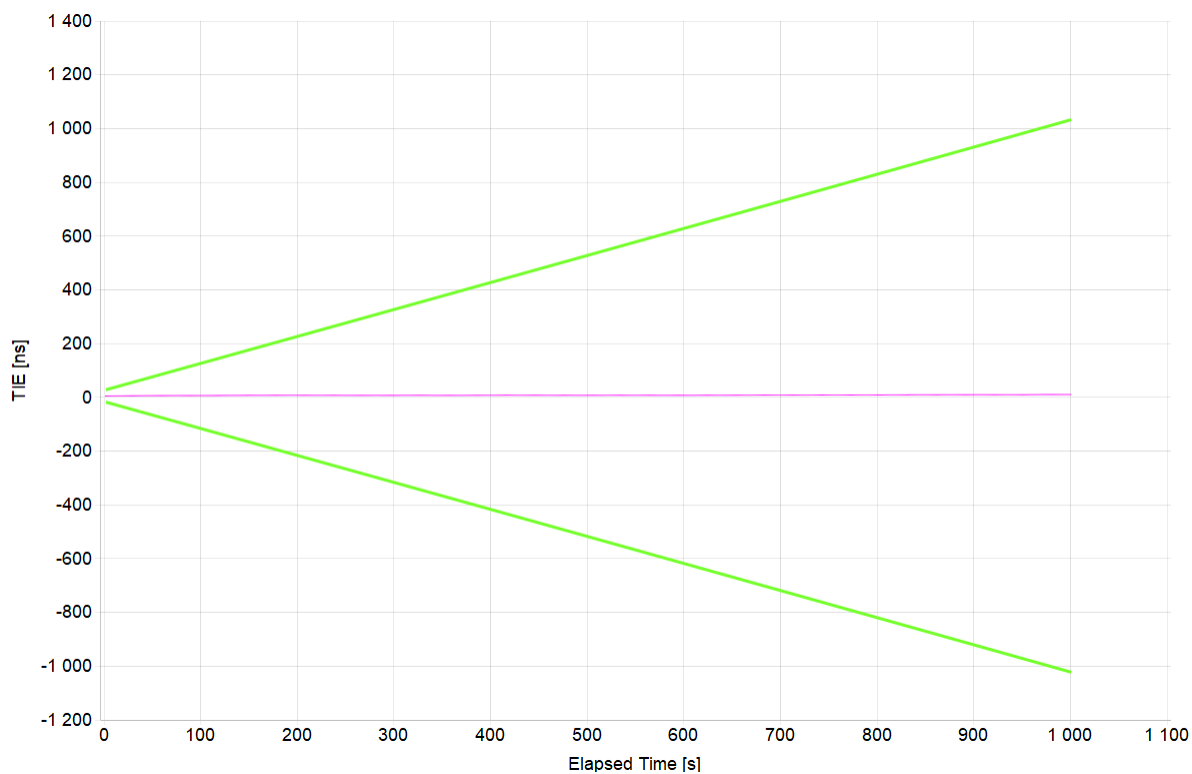

|                     |        |
|---------------------|--------|
| <b>Mean [ns]</b>    | 8.075  |
| <b>Min [ns]</b>     | 5.197  |
| <b>Max [ns]</b>     | 10.447 |
| <b>Max-Min [ns]</b> | 5.25   |


## 19. G.8261: Test Case 15 – Network Traffic Model B

|                               |  |
|-------------------------------|--|
| <b>Test Description</b>       | Test Case 15 - Network Traffic Model B |
| <b>Report Date</b>            | 23-02-10_15-40-56                      |
| <b>Packet Rate (pkt/s)</b>    | 16                                     |
| <b>Beginning of Test</b>      | 2023-02-09 2:50:41 PM                  |
| <b>Test Duration</b>          | 01:46:50                               |
| <b>Time to Phase Lock (s)</b> | 379                                    |

|                           |                                |
|---------------------------|--------------------------------|
| <b>All Mask Results</b>   | <b>Pass</b>                    |
| <b>Mask ONEPPS</b>        | -                              |
| <b>Mask ONEPPS Result</b> | No Mask                        |
| <b>Mask MTIE</b>          | G.8261 EEC Opt. 1 Wander Limit |
| <b>Mask MTIE Result</b>   | <b>Pass</b>                    |
| <b>Mask TDEV</b>          | G.8261 EEC Opt. 1 Wander Limit |
| <b>Mask TDEV Result</b>   | <b>Pass</b>                    |


## 19.1 ONEPPS Analysis

|                               |          |
|-------------------------------|----------|
| <b>Offset Removal Applied</b> | Off      |
| <b>Zero Offset</b>            | -4.303ns |

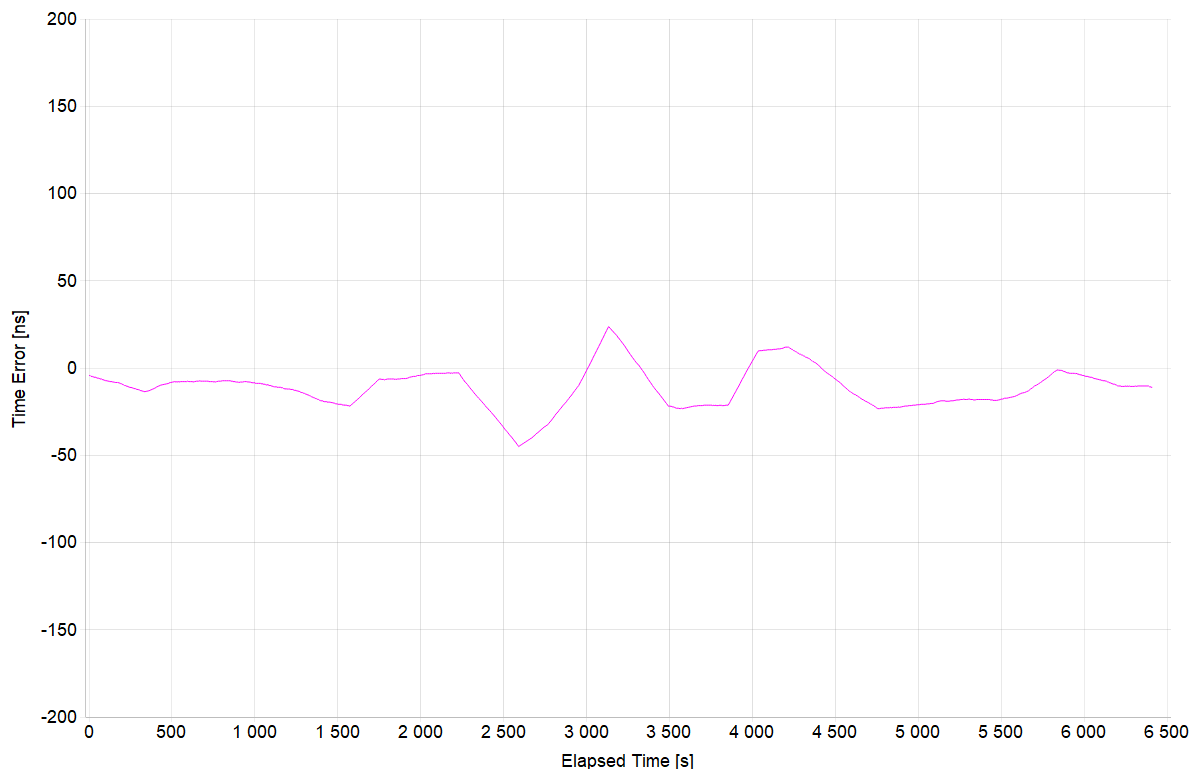


|                     |         |
|---------------------|---------|
| <b>Mean [ns]</b>    | -11.281 |
| <b>Min [ns]</b>     | -45.053 |
| <b>Max [ns]</b>     | 23.697  |
| <b>Max-Min [ns]</b> | 68.75   |

## 19.2 MTIE Analysis

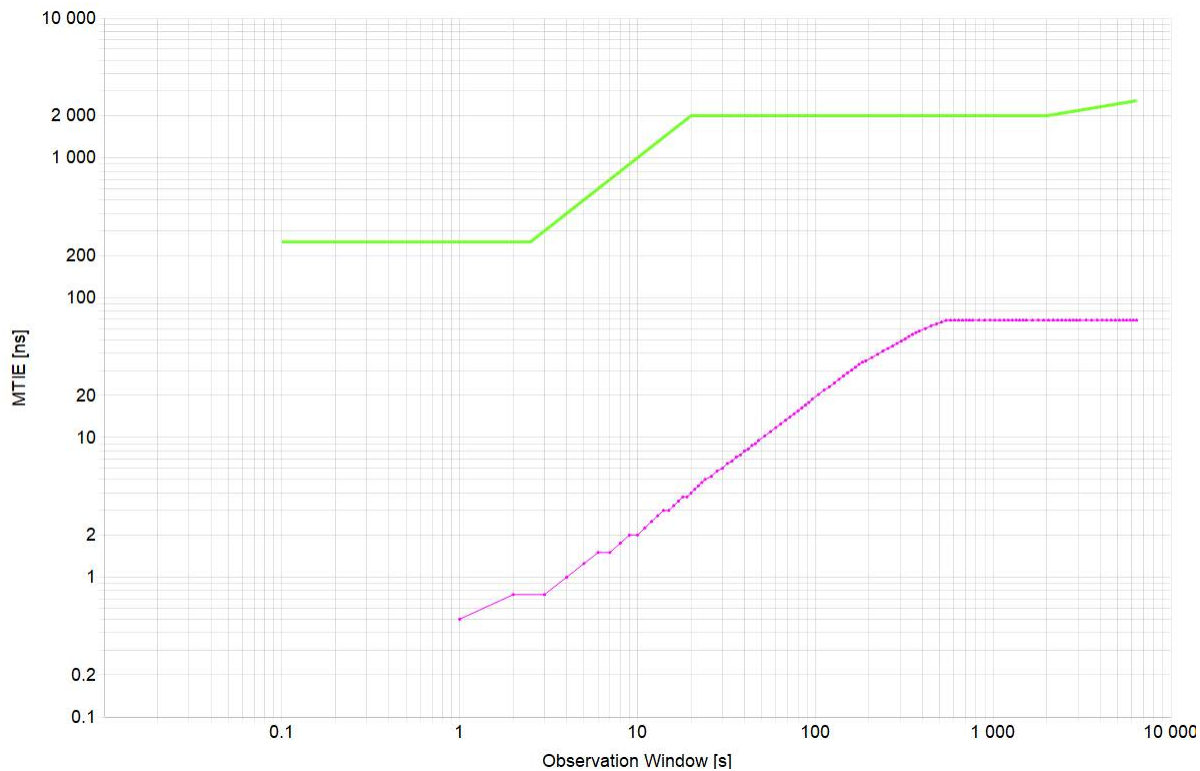

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.5   |
| <b>Max [ns]</b>     | 68.75 |
| <b>Max-Min [ns]</b> | 68.25 |

### 19.3 TDEV Analysis

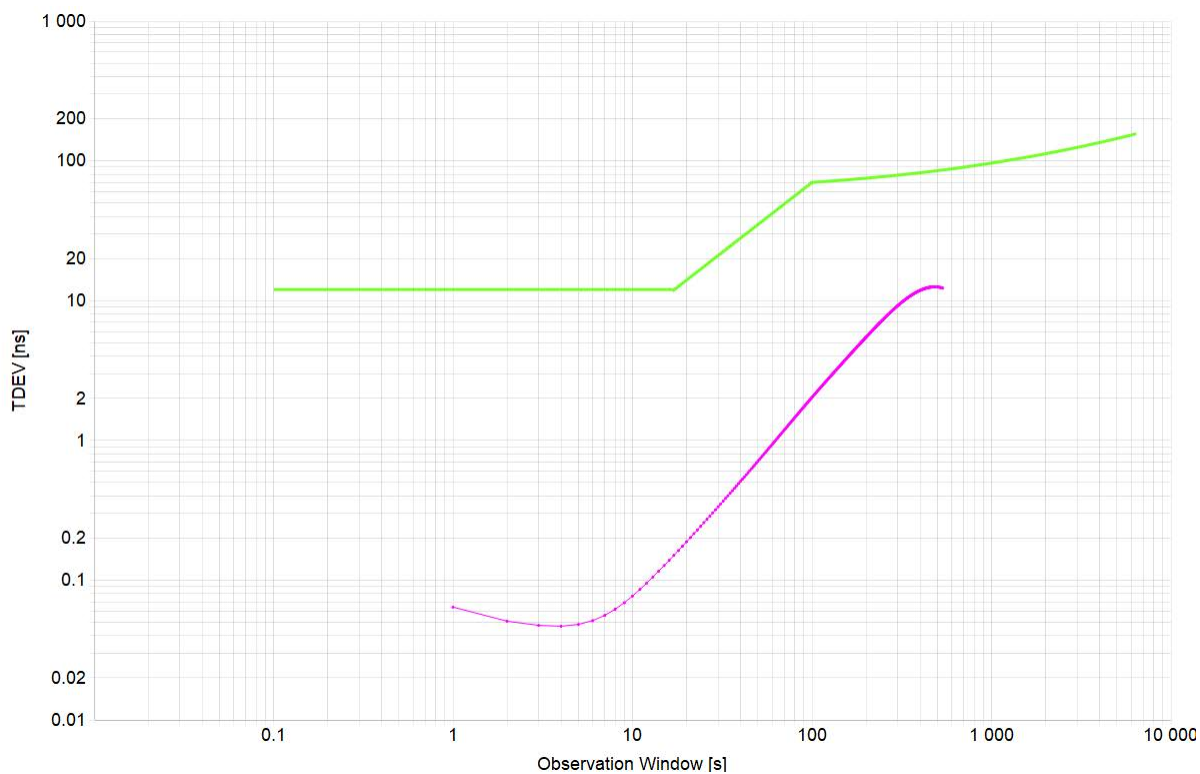

|                     |        |
|---------------------|--------|
| <b>Min [ns]</b>     | 0.047  |
| <b>Max [ns]</b>     | 12.539 |
| <b>Max-Min [ns]</b> | 12.493 |


## 20. G.8261: Test Case 16 – Network Traffic Model B

|                               |  |
|-------------------------------|--|
| <b>Test Description</b>       | Test Case 16 - Network Traffic Model B |
| <b>Report Date</b>            | 23-02-10_15-40-56                      |
| <b>Packet Rate (pkt/s)</b>    | 16                                     |
| <b>Beginning of Test</b>      | 2023-02-10 9:18:11 AM                  |
| <b>Test Duration</b>          | 01:46:50                               |
| <b>Time to Phase Lock (s)</b> | 381                                    |

|                           |                                |
|---------------------------|--------------------------------|
| <b>All Mask Results</b>   | <b>Pass</b>                    |
| <b>Mask ONEPPS</b>        | -                              |
| <b>Mask ONEPPS Result</b> | No Mask                        |
| <b>Mask MTIE</b>          | G.8261 EEC Opt. 1 Wander Limit |
| <b>Mask MTIE Result</b>   | <b>Pass</b>                    |
| <b>Mask TDEV</b>          | G.8261 EEC Opt. 1 Wander Limit |
| <b>Mask TDEV Result</b>   | <b>Pass</b>                    |

## 20.1 ONEPPS Analysis


|                               |           |
|-------------------------------|-----------|
| <b>Offset Removal Applied</b> | Off       |
| <b>Zero Offset</b>            | -39.803ns |

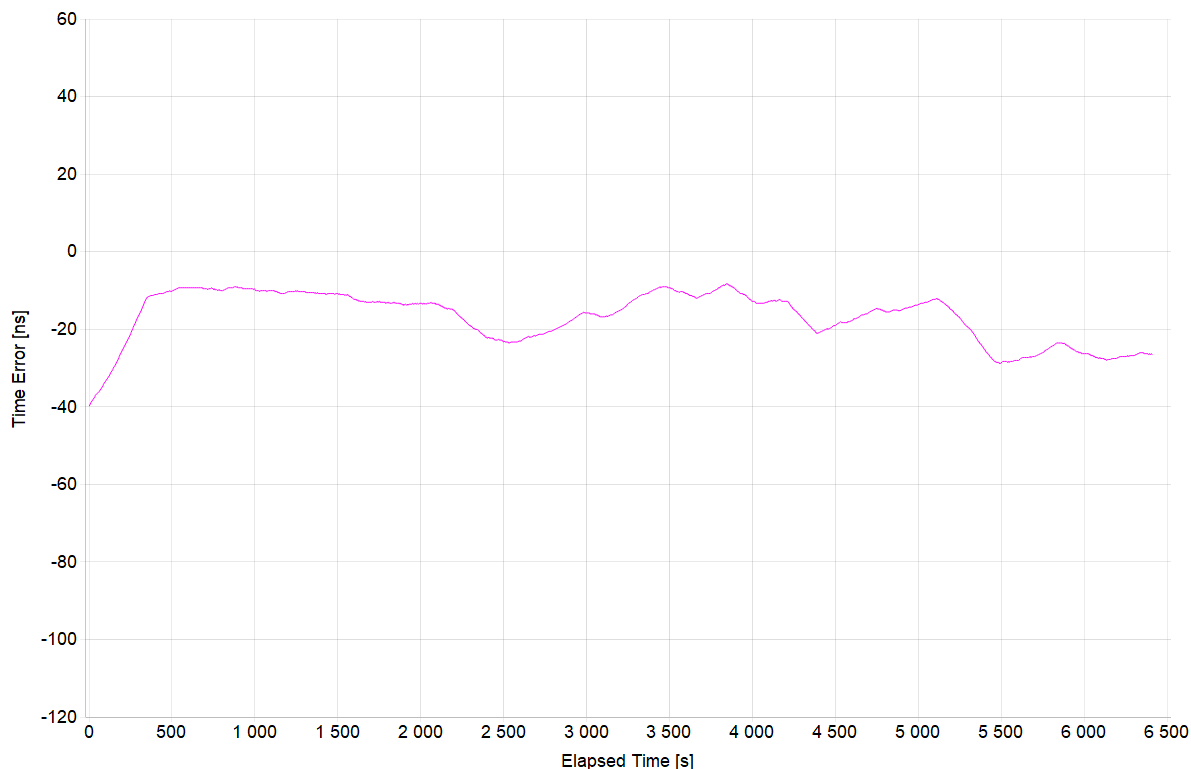

|                     |         |
|---------------------|---------|
| <b>Mean [ns]</b>    | -16.805 |
| <b>Min [ns]</b>     | -39.803 |
| <b>Max [ns]</b>     | -8.303  |
| <b>Max-Min [ns]</b> | 31.5    |




## 20.2 MTIE Analysis

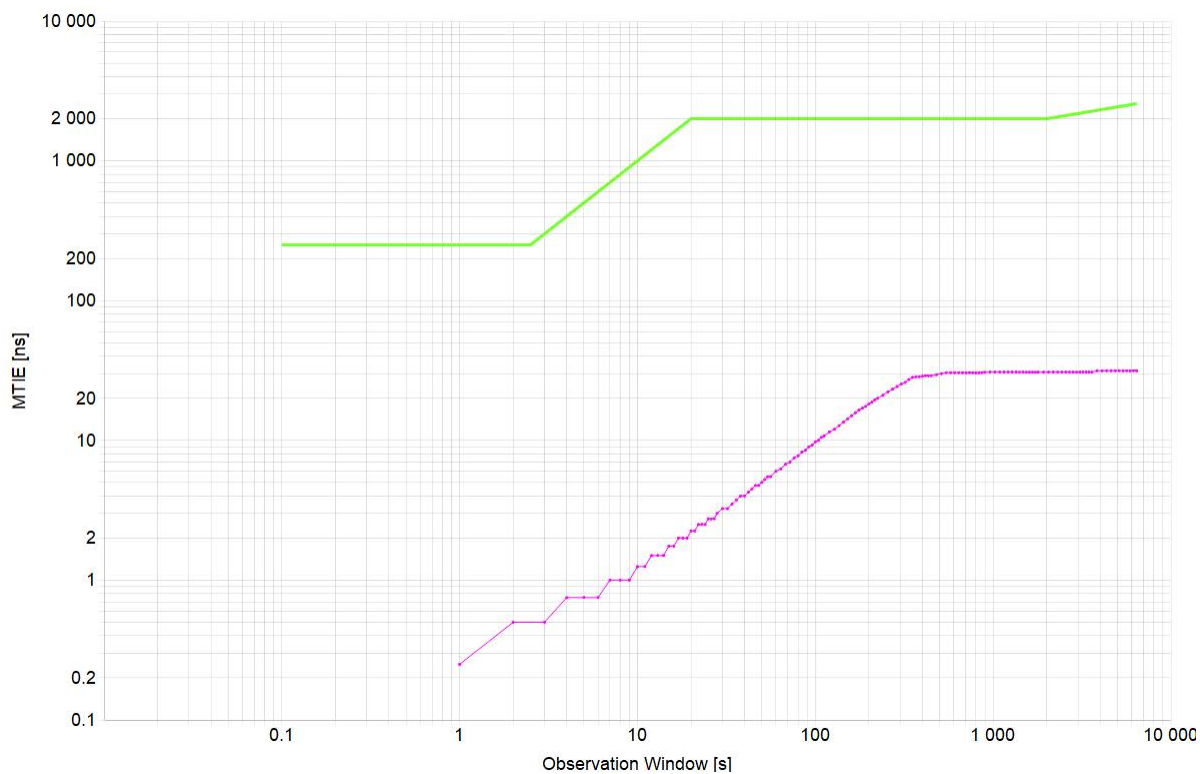

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.25  |
| <b>Max [ns]</b>     | 31.5  |
| <b>Max-Min [ns]</b> | 31.25 |

## 21. TDEV Analysis

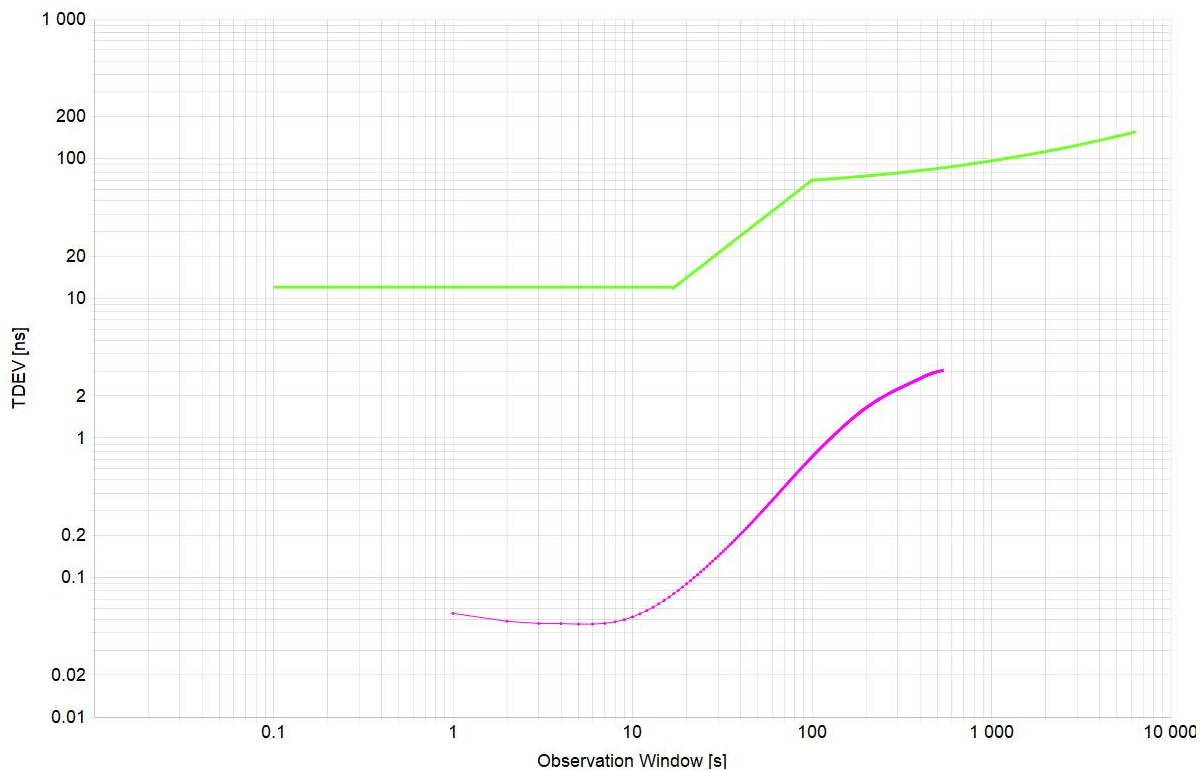

|                     |       |
|---------------------|-------|
| <b>Min [ns]</b>     | 0.046 |
| <b>Max [ns]</b>     | 3.031 |
| <b>Max-Min [ns]</b> | 2.985 |

## 22. Configuration Files

### 22.1 PCM4L Json Files

#### 22.1.1 G.8273.4 PTS

```
{
  "versionId": "0.0",
  "testModeEnable": 0,
  "referenceTrackerType": "AdaptiveTime",
  "mgmtIpAddress": "127.0.0.1",

  "remoteUdsAddress": "/var/run/ptp4l",
  "localUdsAddress": "/var/run/pcm4l",

  "stepWindowSeconds": 1,

  "phc4lConfig":
  {
    "dcoDevice": "/dev/ptp2",
    "tsDevice":
      [
        {
          "tsDeviceName": "/dev/ptp1",
          "tsDevicePinIndex": -1,
          "tsDeviceExtttsChannel": 3,
          "tsDeviceExtttsCorrectionNs": -63
        }
      ],
    "charDevice": "/dev/rsmu0",

    "phaseSnapDelaySeconds": 3
  },

  "deviceConfig":
  {
    "oscillatorType": "MiniOcxo",
    "dpll1588Instance": 2,
    "tsDeviceAlignmentDisable": 0,
    "qualificationTimeoutSeconds": 900,
    "holdover":
    {
      "holdoverType": "Software",
      "holdoverLossPhysicalOosEnable": 0,
      "holdoverTimeoutSeconds": 1000,
      "unqualifiedTimeoutSeconds": 10000,
      "outOfSpecUserDefinedFrequencyOffsetEnable": 0,
      "outOfSpecUserDefinedFrequencyOffsetPpb": 0
    }
  },

  "profileConfig":
  {
```

```

    "physicalPllClockCategory": 4,
    "physicalPllClockCategoryThreshold": 2,
    "physicalPllInstance": 1,
    "physicalPllWaitToRestoreTimeoutValue": 10
  },

  "loggerConfig":
  {
    "timestampType": "System",
    "stdoutLog":
    {
      "enable": 0,
      "selectionMask": "0000000000111111",
      "_description_": "      | |||||_| 0: Sync error      ",
      "_description_": "      | |||||_| 1: Sync warning     ",
      "_description_": "      | |||||_| 2: Sync analysis    ",
      "_description_": "      | |||_| 3: Error              ",
      "_description_": "      | ||_| 4: Warning             ",
      "_description_": "      | |_| 5: Debug               ",
      "_description_": "      | | 7: Timestamp             "
    },

    "externalFdLog":
    {
      "enable": 0,
      "selectionMask": "0000000000111111",
      "_description_": "      | |||||_| 0: Sync error      ",
      "_description_": "      | |||||_| 1: Sync warning     ",
      "_description_": "      | |||||_| 2: Sync analysis    ",
      "_description_": "      | |||_| 3: Error              ",
      "_description_": "      | ||_| 4: Warning             ",
      "_description_": "      | |_| 5: Debug               ",
      "_description_": "      | | 7: Timestamp             "
    },

    "logFile1":
    {
      "enable": 1,
      "fileName": "first_log_file.txt",
      "selectionMask": "0000000000111111",
      "purge": 1,
      "maxFileSize": 1000000,
      "archives": 2
    },

    "syslog":
    {
      "enable": 0,
      "selectionMask": "0000000000111111",
      "ipAddress": "10.64.10.45",
      "udpPort": 514
    }
  },

```

```
"instanceConfig":
[
  {
    "instanceEnable": 1,
    "correctionFieldEnable": 1,
    "lostMasterTimeoutMilliseconds": 2000,

    "trackerConfig":
    {
      "floorDelayEstimateSeconds": -1.0,
      "willCorrectFrequencyAtFirstSnap": 0,
      "minExpProportionForMinTracking": 0.12,

      "stationarityBounds":
      {
        "measureLower": 0.4,
        "measureUpper": 2.5
      },

      "maxNumberOfPhaseSnap": 1,
      "doubleDcoThresholdNanoseconds": 600,
      "phaseSnapThresholdSeconds": 0.00001,
      "rerouteFloorDelayThresholdSeconds": 0.000002,
      "rerouteAbnormalTodChangePpb": 20,
      "highPrecisionFrequencyCorrectionTimeMinutes": 6,

      "pdvThreshold":
      {
        "downlink": -20,
        "uplink": -20
      },

      "pdvThresholdExceededHysteresis":
      {
        "downlink": 1,
        "uplink": 1
      },

      "snapTransitionTimestamps": 4,

      "dcoLoopFilter":
      {
        "minResponseTimeSeconds": 100,
        "maxFfoCorrection": 5,
        "integralBranchGain": 0.2,
        "bandwidthScalar": 0.5
      },

      "desiredPrecisionSeconds": 0.0000001,
      "frequencyLockThresholdPpb": 15.0,
      "timeLockThresholdNanoseconds": 2450,
      "ffoSlopeLimitPpbPerSecond": -1
    }
  }
]
```

```

    }
  }
]
}

```

### 22.1.2 G.8273.2 FTS

```

{
  "versionId": "0.0",
  "testModeEnable": 0,
  "referenceTrackerType": "WritePhase",
  "remoteUdsAddress": "/var/run/ptp4l",
  "localUdsAddress": "/var/run/pcm4l",

  "stepWindowSeconds": 1,

  "phc4lConfig":
  {
    "dcoDevice": "/dev/ptp2",
    "tsDevice":
    [
      {
        "tsDeviceName": "/dev/ptp1",
        "tsDevicePinIndex": -1,
        "tsDeviceExtttsChannel": 3,
        "tsDeviceExtttsCorrectionNs": -63
      }
    ],
    "charDevice": "/dev/rsmu0",

    "phaseSnapDelaySeconds": 3,
    "tsCalibrationEnable": 0
  },

  "deviceConfig":
  {
    "oscillatorType": "Ocxo",
    "dpll1588Instance": 2,
    "tsDeviceAlignmentDisable": 0,
    "holdover":
    {
      "holdoverType": "HardwareEnhanced",
      "holdoverLossPhysicalOosEnable": 0,
      "holdoverTimeoutSeconds": 1000,
      "holdoverQualificationSeconds": 100,
      "unqualifiedTimeoutSeconds": 10000,
      "outOfSpecUserDefinedFrequencyOffsetEnable": 0,
      "outOfSpecUserDefinedFrequencyOffsetPpb": 0
    }
  },

  "profileConfig":
  {

```



```
        "willCorrectFrequencyAtFirstSnap": 1,  
        "frequencyLockThresholdPpb": 16.0,  
        "lockFilterWindowLengthSeconds": 1.0  
    }  
}  
]  
}
```

## 22.2 PTP4L Config Files

### 22.2.1 G.8275.2 Unicast Slave Clock

```
[global]  
domainNumber      44  
  
twoStepFlag       0  
  
# Announce messages  
announceReceiptTimeout  2  
logAnnounceInterval    1  
  
# Sync/Delay_Req/Delay_Resp messages  
# ex. 0 = 1 PPS, -3 = 8 PPS, -4 = 16 PPS  
logSyncInterval        -4  
logMinDelayReqInterval -4  
  
slaveOnly      1  
masterOnly     0  
  
clockClass      255  
clockAccuracy   0xFE  
timeSource      0xa0  
maxStepsRemoved 255  
  
offsetScaledLogVariance 0xffff  
  
G.8275.defaultDS.localPriority 128  
G.8275.portDS.localPriority     128  
  
priority1      128  
priority2      255  
  
dataset_comparison      G.8275.x  
transportSpecific       0  
  
clock_type      OC  
delay_mechanism E2E  
  
#  
# Send timestamps to pcm41  
#  
free_running      1  
slave_event_monitor /var/run/pcm41
```



```
tsproc_mode          raw
tx_timestamp_timeout 5
sanity_freq_limit    0

network_transport    UDPv4

hybrid_e2e           1
inhibit_multicast_service 1
unicast_listen        1
unicast_req_duration 300

[unicast_master_table]
table_id              1
logQueryInterval      2
UDPv4                 10.64.10.1

[vnptp1]
unicast_master_table  1
```

## 22.2.2 G.8275.1 Multicast Boundary Clock

```
[global]
domainNumber 24

twoStepFlag 0

# Announce messages
announceReceiptTimeout 3
logAnnounceInterval -3

# Sync/Delay_Req/Delay_Resp messages - 16 packets-per-second, -4 = 16 PPS
logSyncInterval -4
logMinDelayReqInterval -4

#
# step_window is in units of sync packets
#
# 3 seconds:
# @ 16 PPS, set to 48
# @ 1 PPS, set to 3
step_window 48

clockClass 255
clockAccuracy 0xFE
timeSource 0xa0
maxStepsRemoved 255

offsetScaledLogVariance 0xffff

G.8275.defaultDS.localPriority 128
G.8275.portDS.localPriority 128
```

```

priority1      128
priority2      255

dataset_comparison      G.8275.x
transportSpecific      0

network_transport      L2

clock_type      BC
delay_mechanism      E2E
#
# Send timestamps to pcm41
#
free_running      1
slave_event_monitor      /var/run/pcm41
tsproc_mode      raw
tx_timestamp_timeout      5
sanity_freq_limit      0

tsproc_mode      raw
ptp_dst_mac      01:1B:19:00:00:00

[vnptp0]
[vnptp1]
    
```

### 22.3 TCS/Bin Files

| Standard     | TCS/Bin Files                             |
|--------------|---|
| G.8273.2 FTS | 8A34001_knetsync_todsync_en_v2_synce2.bin |
| G.8273.4 PTS | 8A34001_knetsync_todsync_en_v2_wf.bin     |

### 23. Revision History

| Revision | Date         | Description      |
|----------|--------------|------------------|
| 1.00     | May 10, 2023 | Initial release. |

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers who are designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only to develop an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third-party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising from your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.01)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit [www.renesas.com/contact-us/](http://www.renesas.com/contact-us/).