

Introduction

This document reports the results of low and high dose rate total dose testing of the [ISL70219ASEH](#) dual operational amplifier. The tests were conducted to assess the total dose hardness of the part and to provide an estimate of dose rate, bias, or anneal sensitivity. Parts were irradiated under bias and with all pins grounded at low and high dose rate. The ISL70219ASEH is acceptance tested on a wafer-by-wafer basis to 300krad(Si) at high dose rate (50rad(Si)/s–300rad(Si)/s) and to 50krad(Si) at low dose rate (0.01rad(Si)/s).

Related Literature

For a full list of related documents, visit our website

- [ISL70219ASEH](#) product page
- MIL-STD-883 Test Method 1019

Part Description

The ISL70219ASEH is a precision dual operational amplifier featuring competitive low noise vs power consumption characteristics, low offset voltage, low input bias current, and low temperature drift, making this device an excellent choice for hardened applications requiring high DC accuracy and moderate AC performance. The ISL70219ASEH is offered in a 10 Ld hermetic package and is specified across the -55°C to +125°C temperature range. Constructed with the Renesas dielectrically isolated PR40 process, this device is immune to single event latchup and features improved Single Event Transient (SET) performance. The ISL70219ASEH offers ensured performance across the full -55°C to +125°C military temperature range.

The following list shows key pre- and post-radiation specifications.

- Input offset voltage ±85µV pre, ±110µV post, max
- Input bias current ±2.5nA pre, ±15.0nA post, max
- Input offset current ±2.5nA pre, ±10.0nA post, max
- Supply current, each amplifier 725µA pre, 850µA post, max
- Voltage noise 8nV/Hz
- Common-mode rejection ratio 120dB
- Power supply rejection ratio 120dB
- Open-loop gain 129.5dB
- Supply voltage range 4.5V to 36V in beam (86.4MeV•cm²/mg)
- Operating temperature range -55°C to +125°C
- Standard Microcircuit Drawing (SMD) [5962-14226](#)

1. Test Description

1.1 Irradiation Facilities

High dose rate testing was performed at 60rad(Si)/s using a Gammacell 220 irradiator located at the Renesas facility in Palm Bay, FL. Low dose rate testing was performed at 0.01rad(Si)/s using the Renesas Palm Bay N40 panoramic low dose rate irradiator.

1.2 Test Fixturing

Figure 1 shows the configurations used for biased and unbiased irradiation.

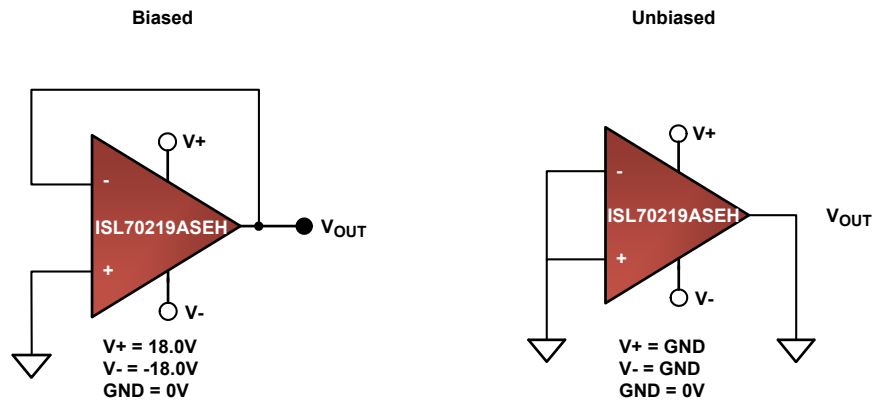


Figure 1. Irradiation Bias Configuration For The ISL70219ASEH Per SMD 5962-14226

1.3 Characterization Equipment and Procedures

All electrical testing was performed outside the irradiator using the production Automated Test Equipment (ATE) with datalogging at each downpoint. Downpoint electrical testing was performed at room temperature. Post-irradiation anneals were performed using a small temperature chamber.

1.4 Experimental Matrix

Total dose irradiation proceeded in accordance with the guidelines of MIL-STD-883 Test Method 1019.7. The experimental matrix consisted of 16 samples irradiated at low dose rate under bias, 16 samples irradiated at low dose rate with all pins grounded, 12 samples irradiated at high dose rate under bias, and 12 samples irradiated at high dose rate with all pins grounded. Two control units were used to ensure repeatable data.

Samples of the ISL70219ASEH were drawn from PR40 fabrication lot X0M0J and were packaged in a hermetic 10 Ld solder-sealed flatpack package (CDFP4-F10, code KCP, seal date 26 March 2014). Samples were processed through the standard burn-in cycle before irradiation, as required by MIL-STD-883, and were screened to the ATE limits at room temperature before the test.

1.5 Downpoints

Downpoints for the low dose rate tests were zero, 10krad(Si), 30krad(Si), and 50krad(Si). A post low dose rate biased anneal was performed after 50krad(Si). Downpoints for the high dose rate tests were zero, 30krad(Si), 50krad(Si), 100krad(Si), 300krad(Si), and 450krad(Si); the 450krad(Si) level represents the 50% overtest over the part's rated 300krad(Si), as per MIL-STD-883 Method 1019. Post high dose rate biased anneals were performed after 300krad(Si) and 450krad(Si).

2. Results

2.1 Attributes Data

High dose rate irradiation and subsequent anneals of the ISL70219ASEH are complete. The low dose anneal was performed on half the LDR samples after the 50krad(Si) downpoint. The other half were going to be irradiated further but technical issues prevented that.

All parts met the SMD post-radiation specifications at all downpoints. No differences in total dose response were noted between biased and grounded irradiation for any parameters. Additionally, no channel-to-channel differences

were noted, either in the pre-irradiation data or in the total dose response of the parts. We did not note clear dose rate sensitivity in the input bias current, and the part is considered dose rate sensitive.

The ISL70219ASEH is acceptance tested on a wafer-by-wafer basis to 300krad(Si) at the high dose rate (50rad(Si)/s–300rad(Si)/s) and to 50krad(Si) at the low dose rate (0.01rad(Si)/s), providing hardness assurance at both dose rates. [Table 1](#) summarizes the results.

Table 1. ISL71091ASEH Total Dose Test Attributes Data

Dose Rate (Note 1)	Bias	Sample Size	Downpoint	Pass (Note 2)	Rejects
LDR	Biased	16	Pre-irradiation	16	0
			10krad(Si)	16	0
			30krad(Si)	16	0
			50krad(Si)	16	0
			Sample anneal	8	0
LDR	Grounded	16	Pre-irradiation	16	0
			10krad(Si)	16	0
			30krad(Si)	16	0
			50krad(Si)	16	0
			Sample anneal	8	0
HDR	Biased	12	Pre-irradiation	12	0
			30krad(Si)	12	0
			50krad(Si)	12	0
			100krad(Si)	12	0
			300krad(Si)	12	0
			Sample anneal	6	0
			450krad(Si)	12	0
			Sample anneal	12	0
HDR	Grounded	12	Pre-irradiation	12	
			30krad(Si)	12	0
			50krad(Si)	12	0
			100krad(Si)	12	0
			300krad(Si)	12	0
			Sample anneal	6	0
			450krad(Si)	12	0
			Sample anneal	12	0

Notes:

1. "HDR" indicates high dose rate (50rad(Si)-300rad(Si)/s) as specified in MIL-STD-883 TM1019; the actual dose rate for these tests was 65rad(Si)/s. "LDR" indicates low dose rate (0.01rad(Si)/s), also as specified in TM1019.
2. "Pass" indicates a sample that passes all post-irradiation SMD limits.

2.2 Variables Data

The plots in [Figures 2](#) through [31](#) show data for key parameters at all downpoints to date. We have plotted representative results for the $\pm 18V$ and $\pm 5V$ supply voltage cases, with some CMRR and PSRR data shown for $\pm 2.75V$. The plots show the median of key parameters as a function of low and high dose rate total dose for each of the two irradiation conditions. All samples passed the SMD post-irradiation limits at all downpoints.

3. Variables Data Plots

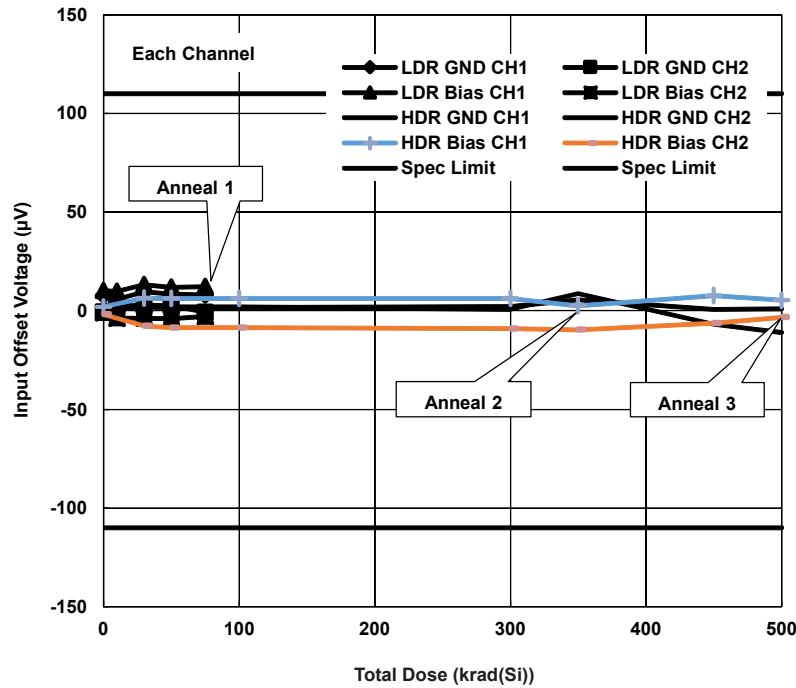


Figure 2. ISL70219ASEH input offset voltage, $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are $-110\mu\text{V}$ and $+110\mu\text{V}$.

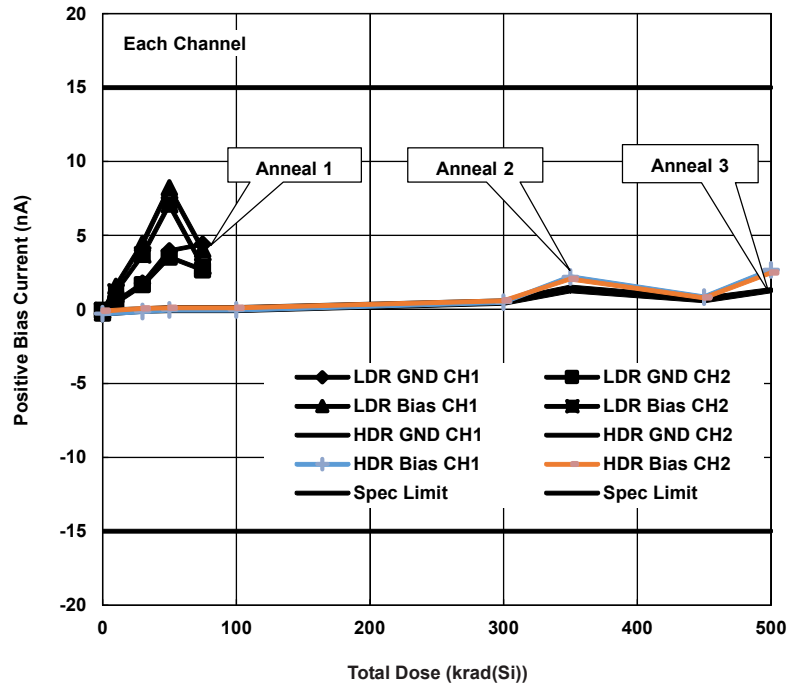


Figure 3. ISL70219ASEH positive input bias current, $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -15nA and +15nA.

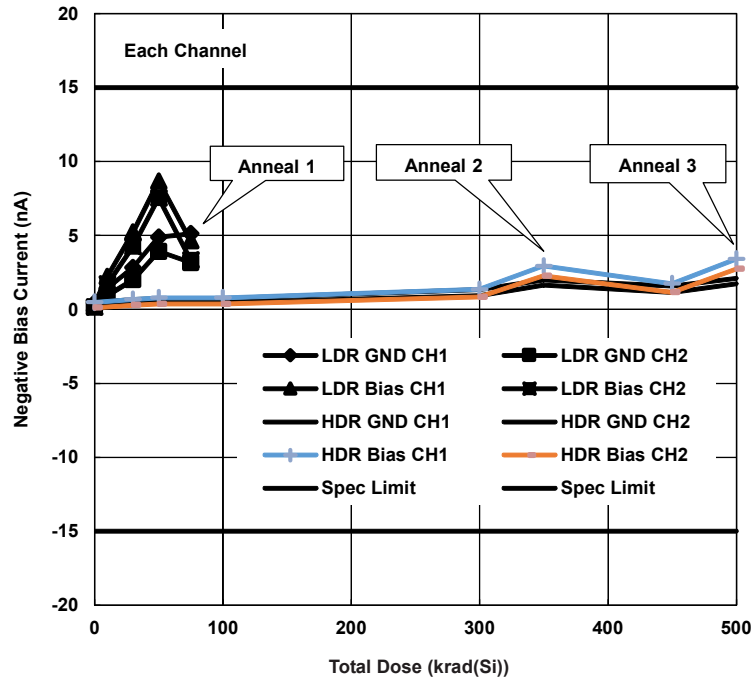


Figure 4. ISL70219ASEH negative input bias current, $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -15nA and +15nA.

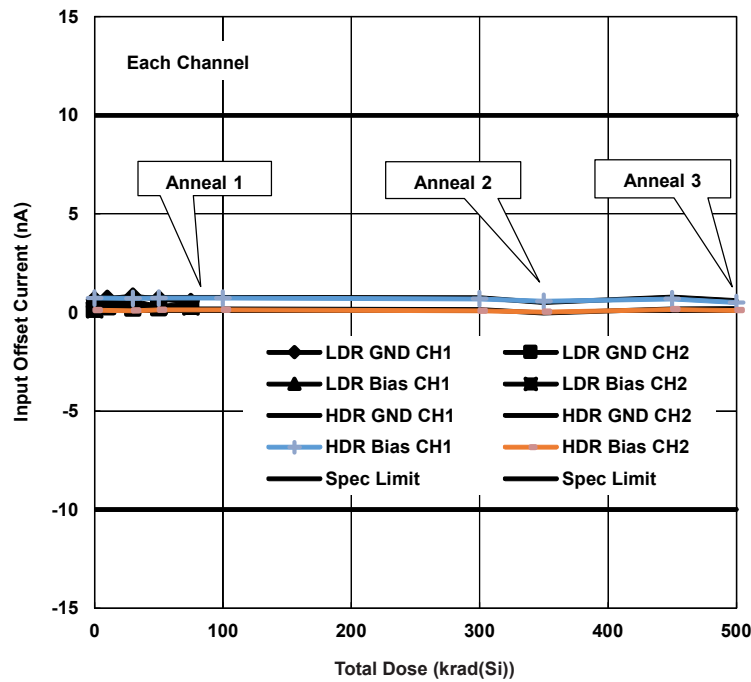


Figure 5. ISL70219ASEH input offset current, $\pm 18\text{V}$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -10nA and $+10\text{nA}$.

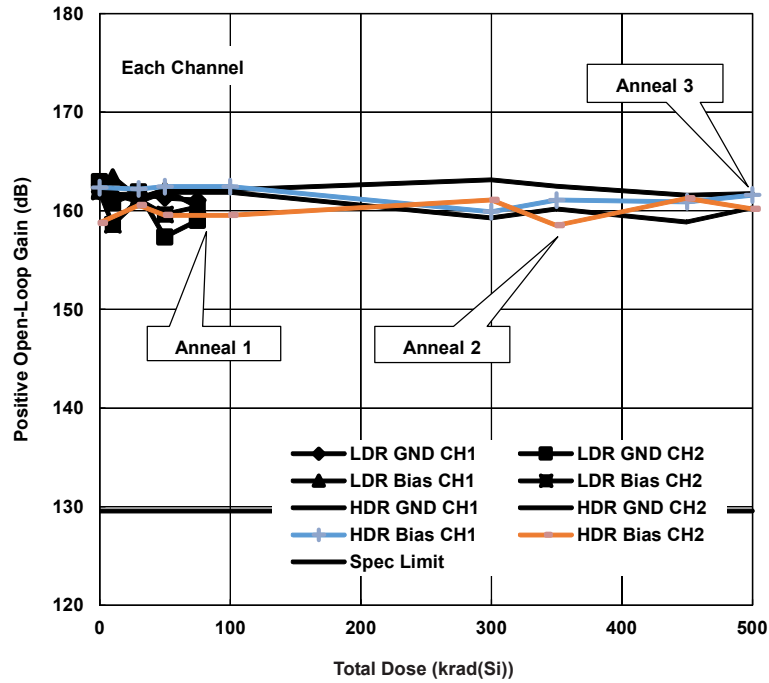


Figure 6. ISL70219ASEH positive open-loop gain, ±18V supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 129.5dB minimum.

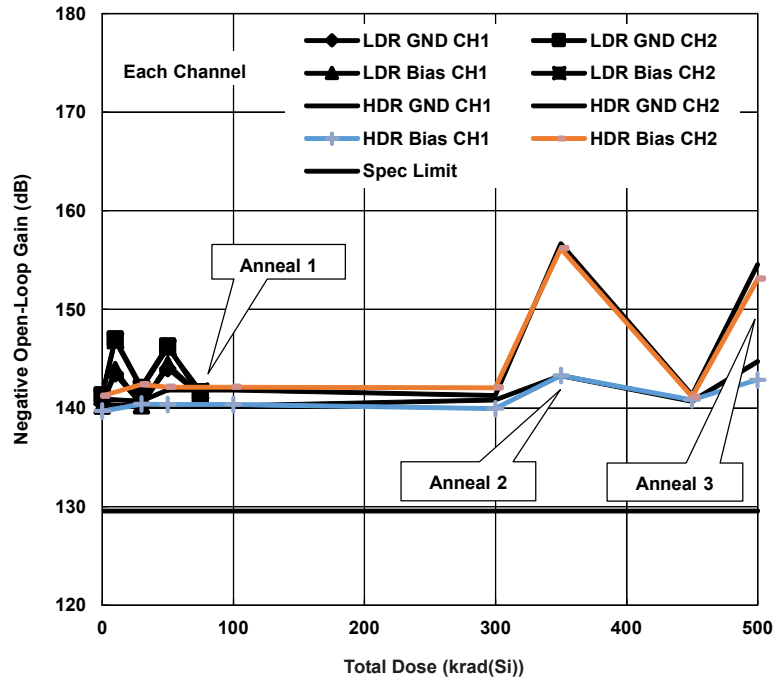


Figure 7. ISL70219ASEH negative open-loop gain, $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 129.5dB minimum.

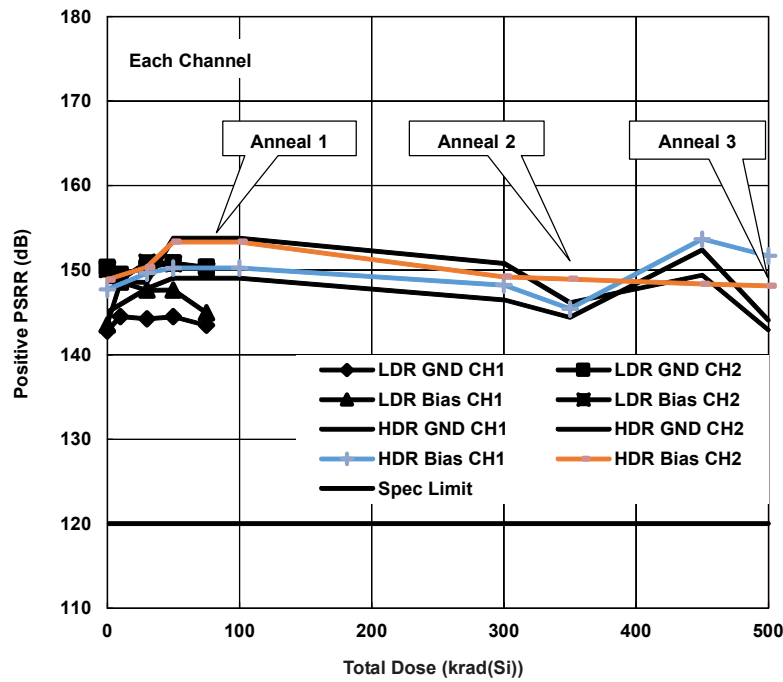


Figure 8. ISL70219ASEH positive Power Supply Rejection Ratio (PSRR), $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

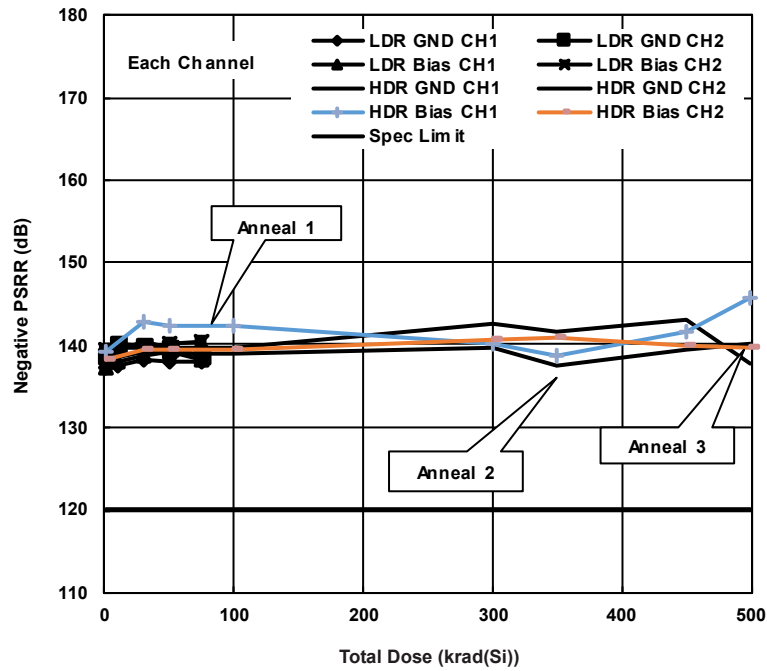


Figure 9. ISL70219ASEH negative Power Supply Rejection Ratio (PSRR), $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

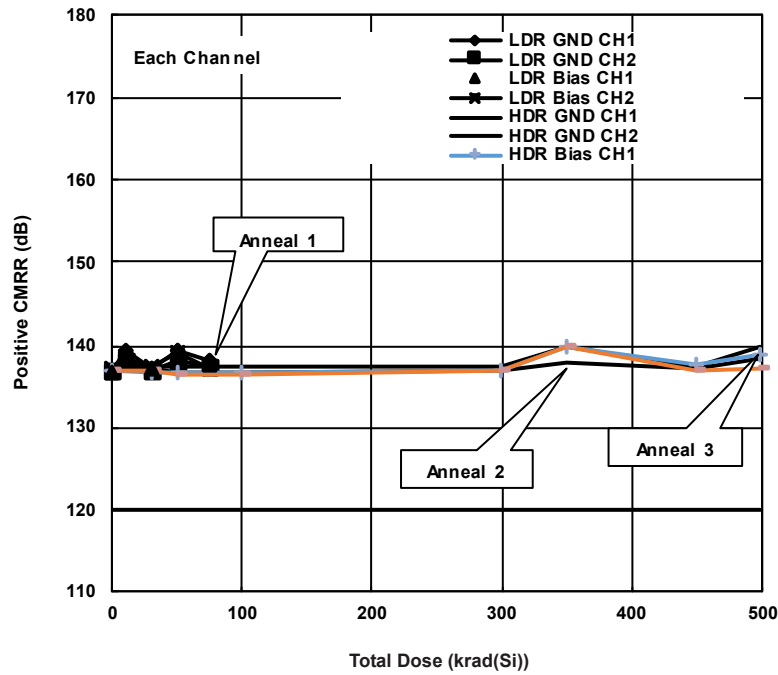


Figure 10. ISL70219ASEH positive Common-Mode Rejection Ratio (CMRR), $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

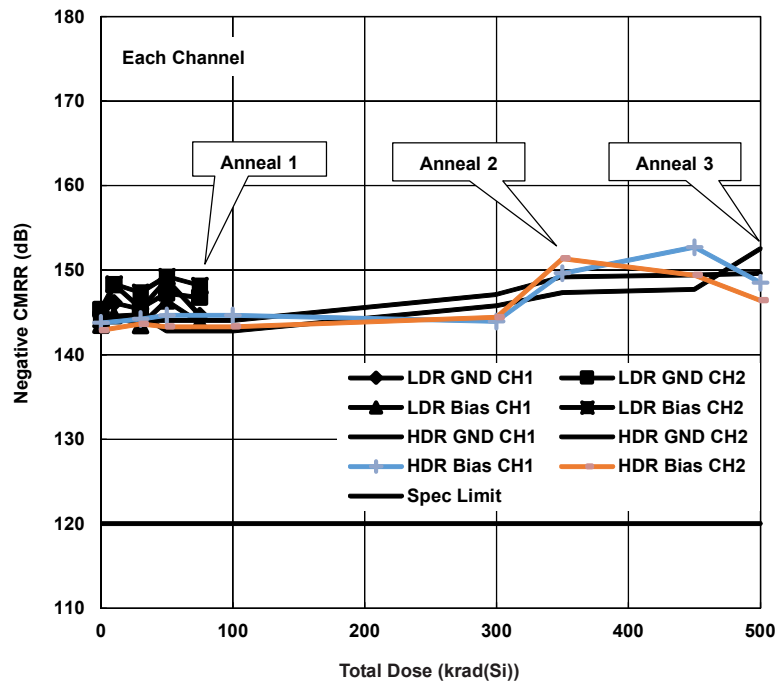


Figure 11. ISL70219ASEH negative Common-Mode Rejection Ratio (CMRR), $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

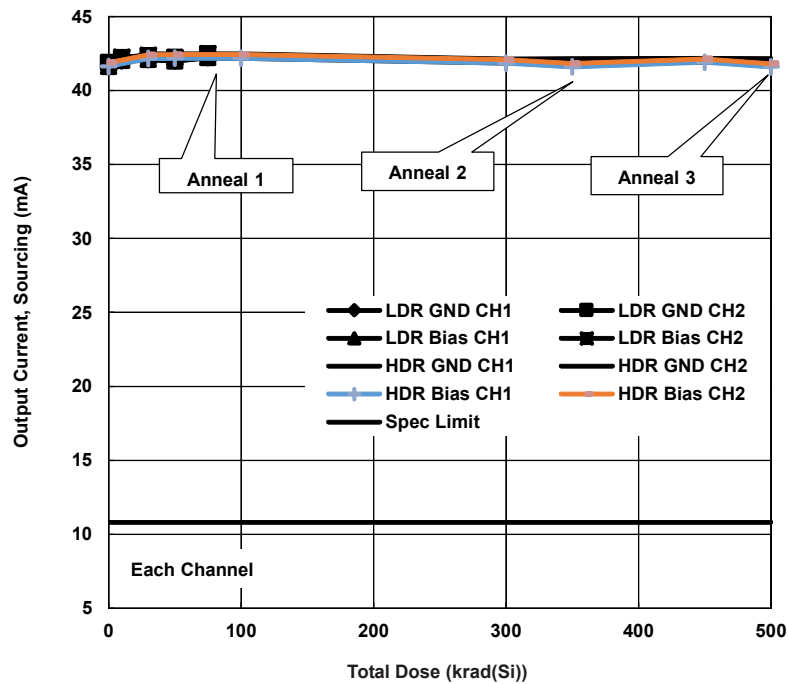


Figure 12. ISL70219ASEH output short-circuit current, sourcing, $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 10.8mA (typical) minimum.

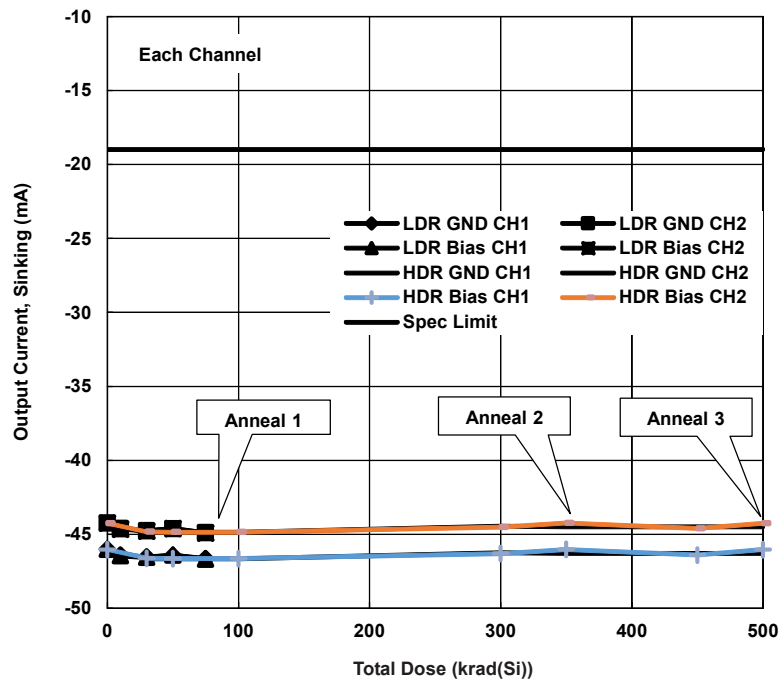


Figure 13. ISL70219ASEH output short-circuit current, sinking, $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is -19mA (typical) minimum.

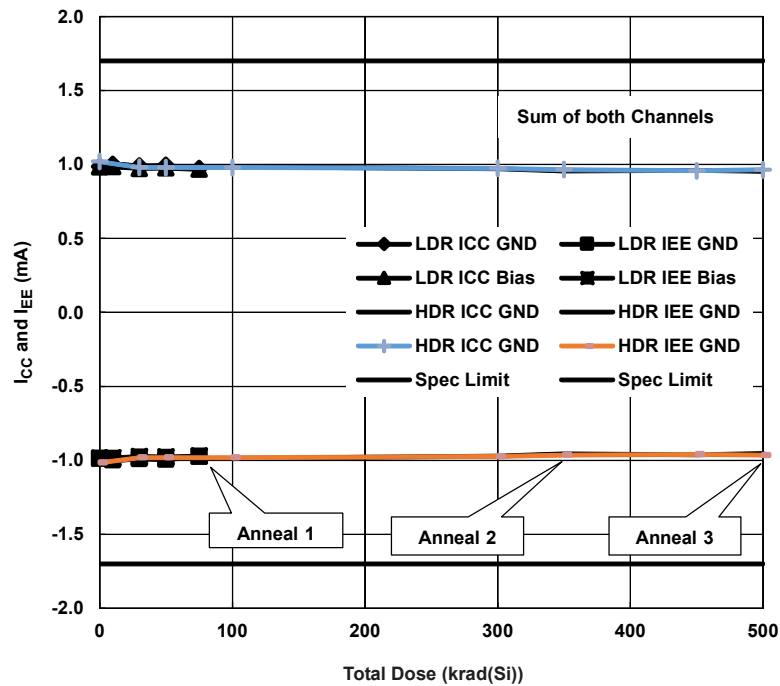


Figure 14. ISL70219ASEH positive and negative supply current, $\pm 18V$ supplies, Channels 1 and 2, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -1.7mA (I_{CC}) and $+1.7\text{mA}$ (I_{EE}).

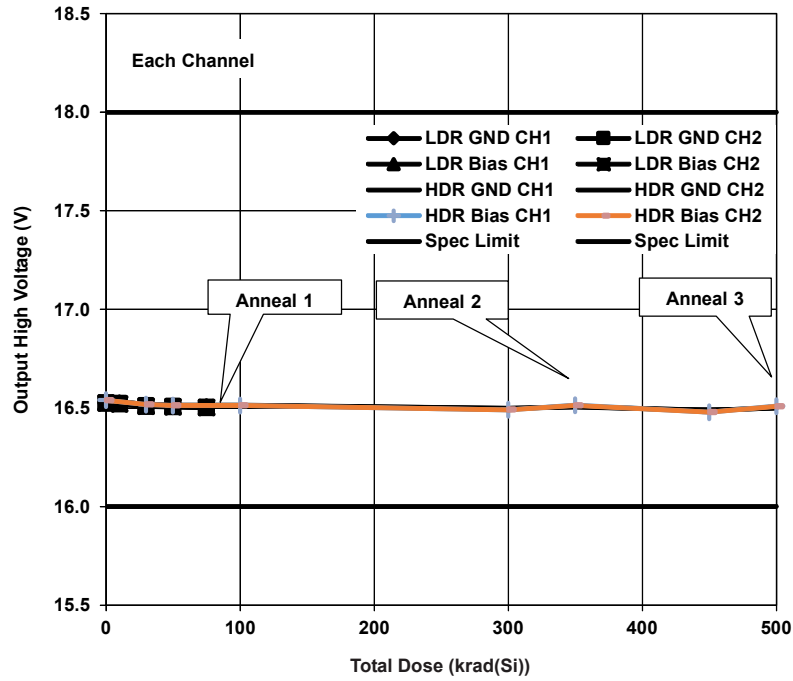


Figure 15. ISL70219ASEH output high voltage, Channels 1 and 2, $\pm 18V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are 16.0V and 18.0V.

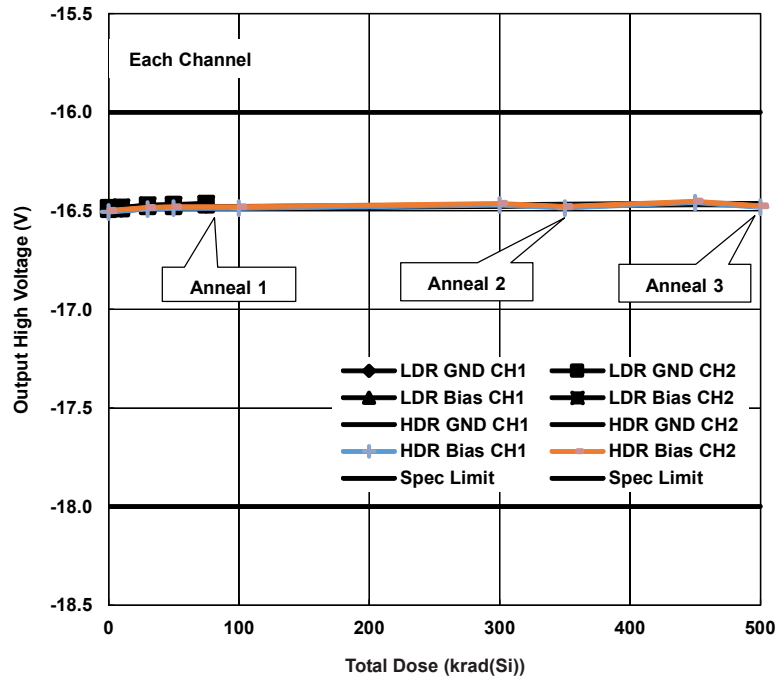


Figure 16. ISL70219ASEH output low voltage, Channels 1 and 2, $\pm 18V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -16V and -18V.

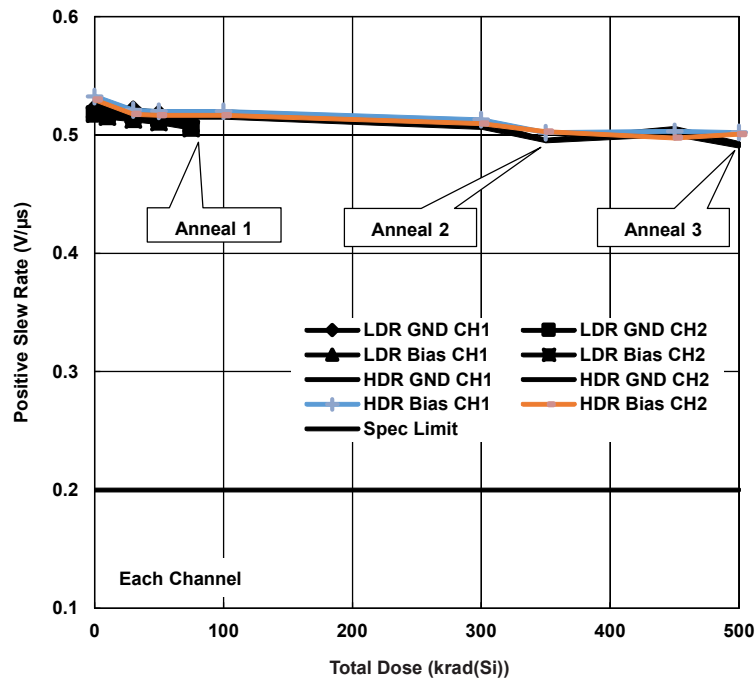


Figure 17. ISL70219ASEH positive slew rate, Channels 1 and 2, $\pm 18V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is $0.2\text{V}/\mu\text{s}$ minimum.

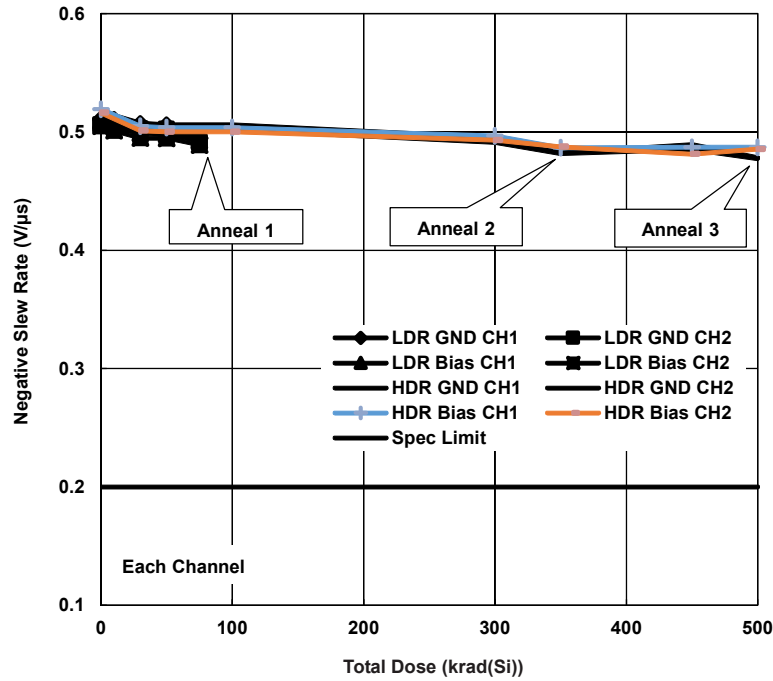


Figure 18. ISL70219ASEH negative slew rate, Channels 1 and 2, ±18V supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 0.2V/μs minimum.

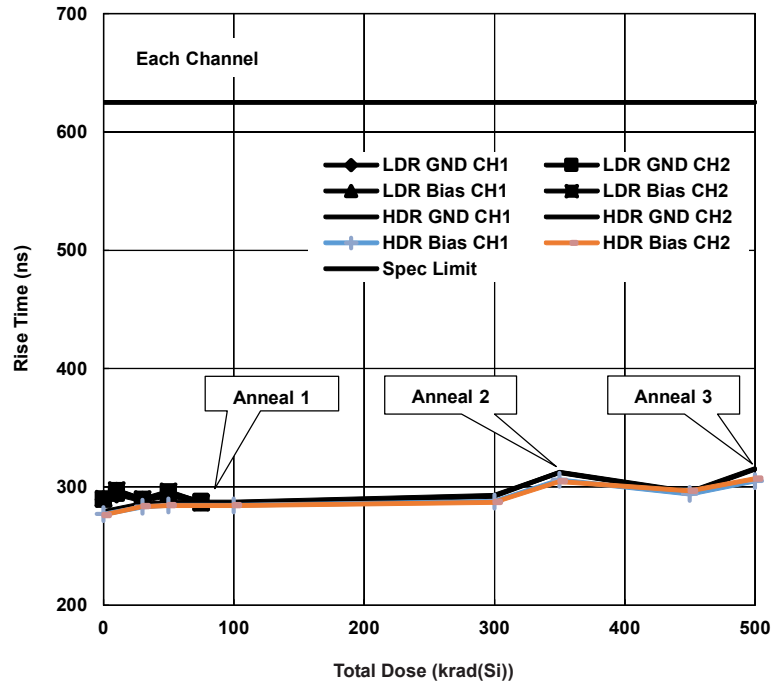


Figure 19. ISL70219ASEH rise time, Channels 1 and 2, $\pm 18V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 625ns minimum.

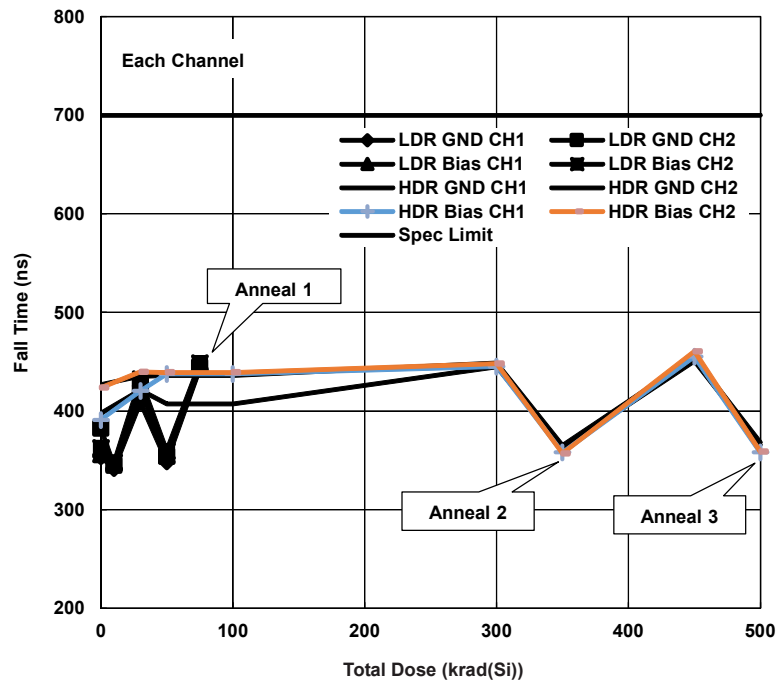


Figure 20. ISL70219ASEH fall time, Channels 1 and 2, $\pm 18V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 700ns minimum.

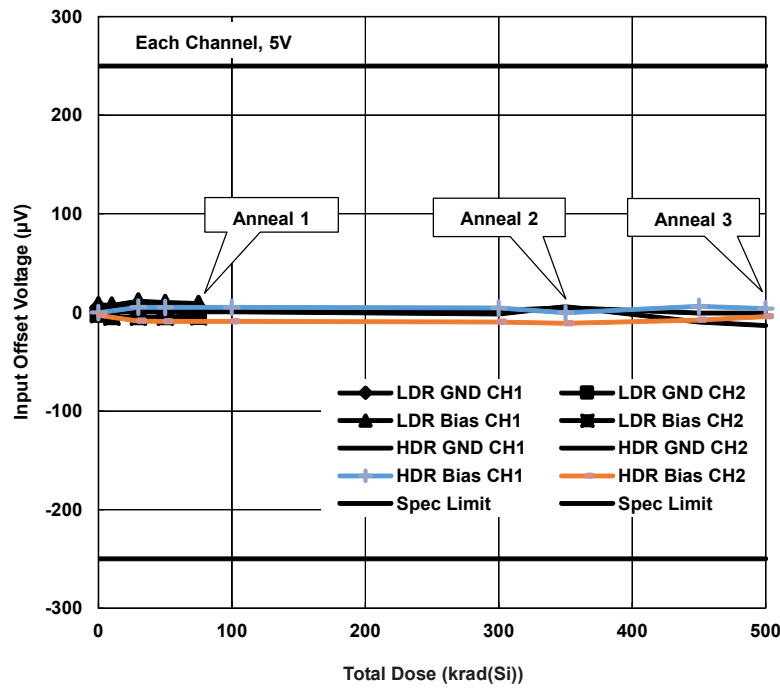


Figure 21. ISL70219ASEH input offset voltage, Channels 1 and 2, $\pm 5V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -250µV and +250µV.

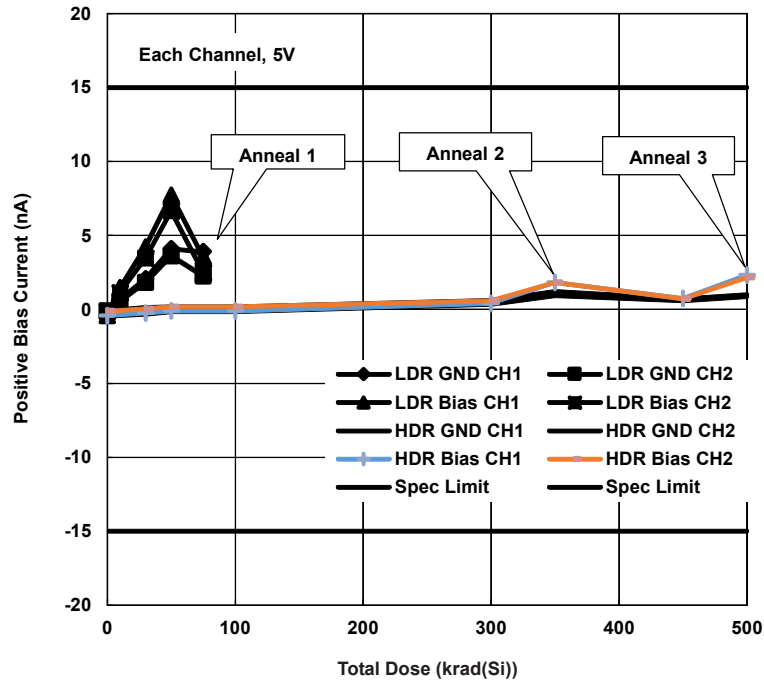


Figure 22. ISL70219ASEH positive bias current, Channels 1 and 2, $\pm 5V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -15nA and +15nA.

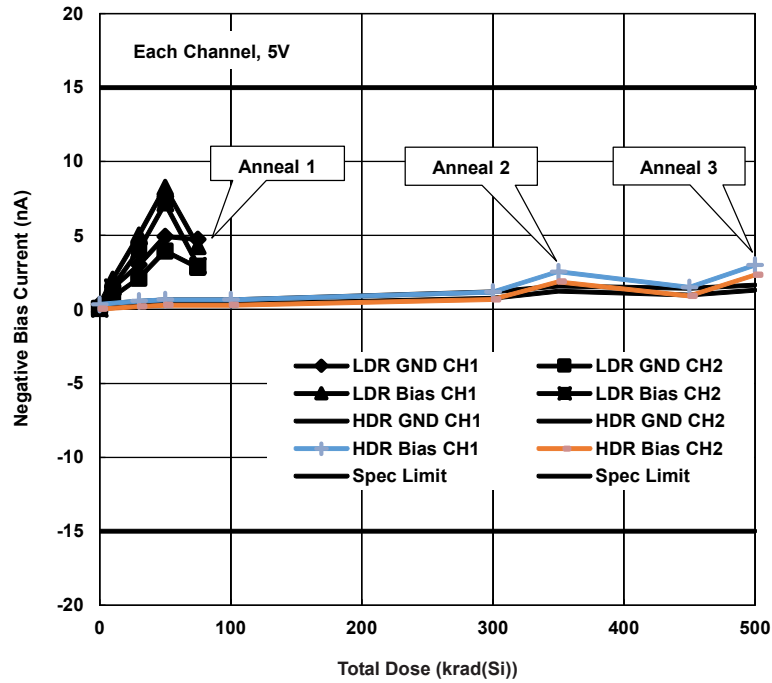


Figure 23. ISL70219ASEH negative bias current, Channels 1 and 2, $\pm 5V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -15nA and +15nA.

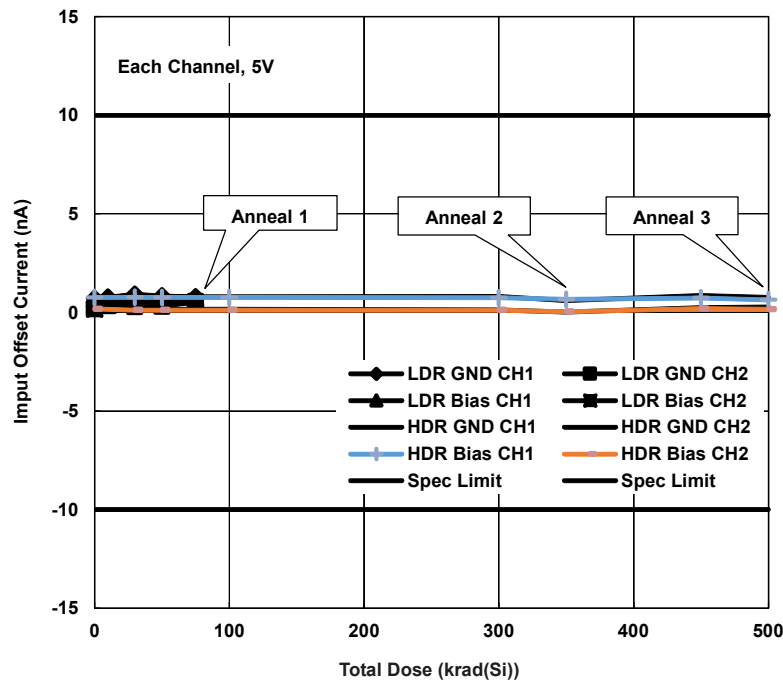


Figure 24. ISL70219ASEH input offset current, Channels 1 and 2, $\pm 5V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -10.0nA and +10.0nA.

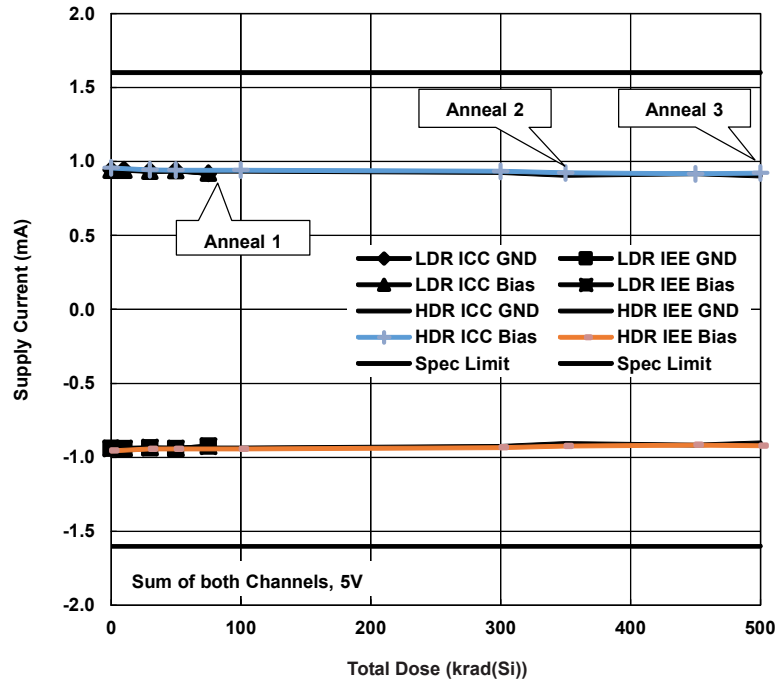


Figure 25. ISL70219ASEH positive and negative supply current, Channels 1 and 2, $\pm 5V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limits are -1.6mA (I_{CC}) and +1.6mA (I_{EE}).

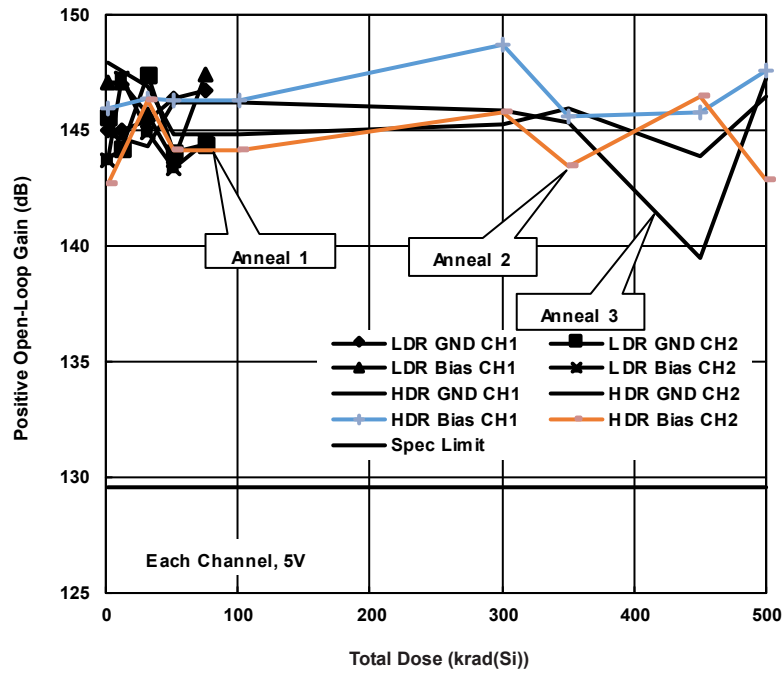


Figure 26. ISL70219ASEH positive open-loop gain, Channels 1 and 2, $\pm 5V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 129dB minimum.

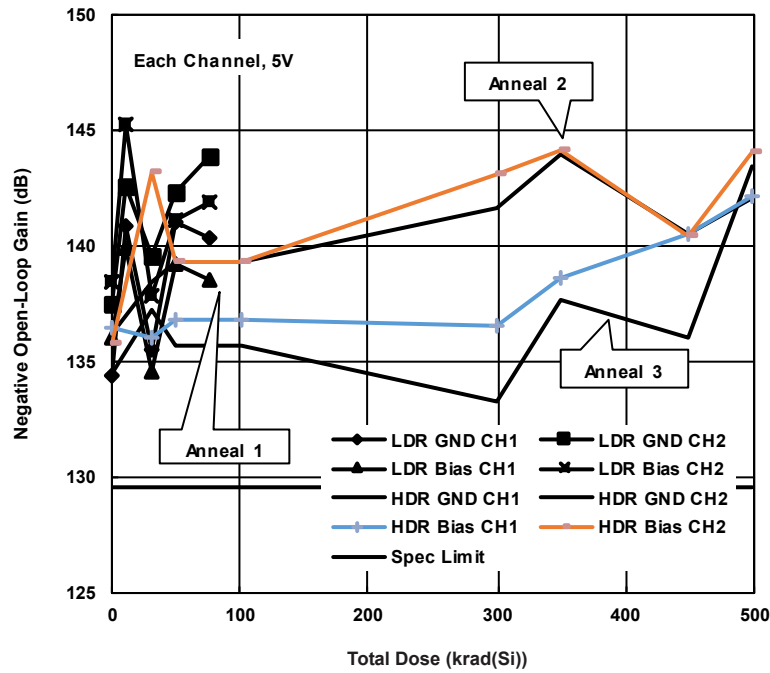


Figure 27. ISL70219ASEH negative open-loop gain, Channels 1 and 2, $\pm 5V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 129dB minimum.

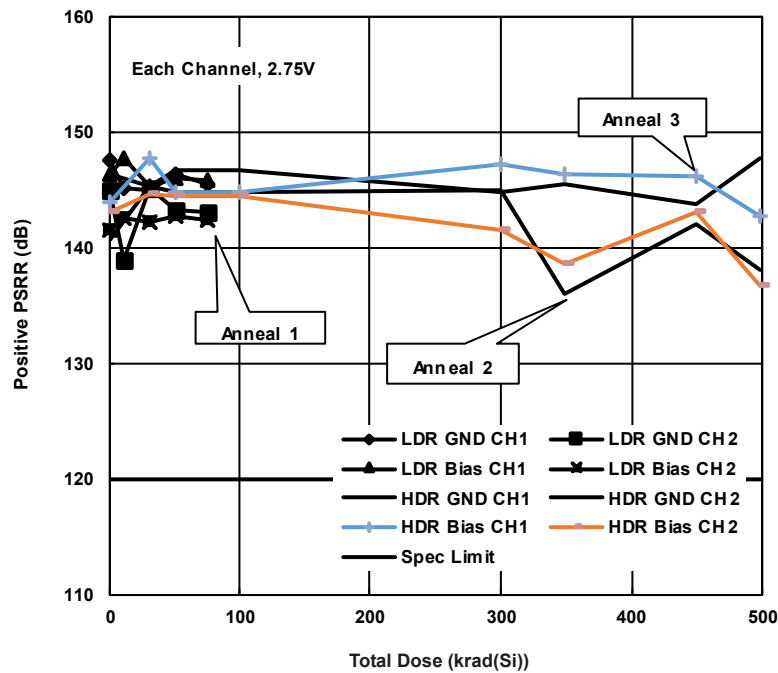


Figure 28. ISL70219ASEH positive Power Supply Rejection Ratio (PSRR), Channels 1 and 2, $\pm 2.75V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

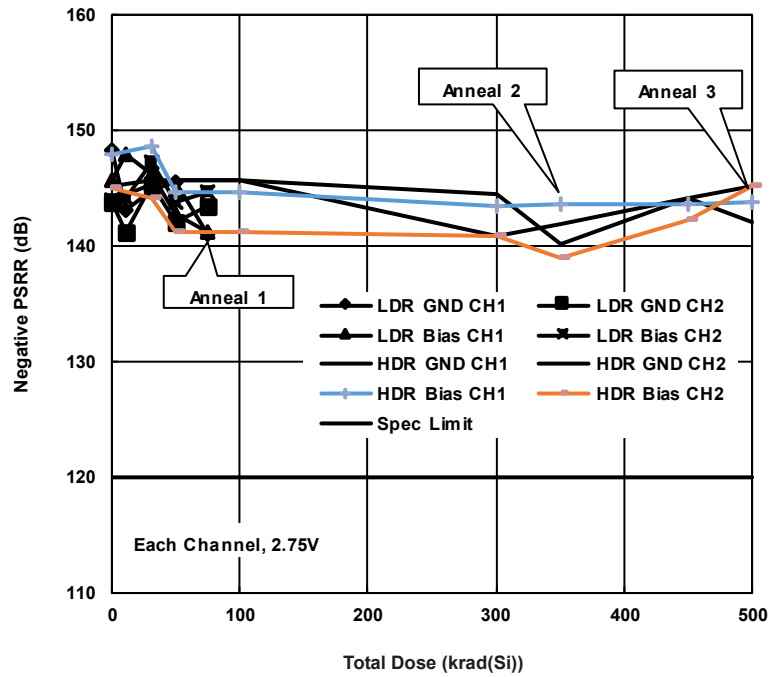


Figure 29. ISL70219ASEH negative Power Supply Rejection Ratio (PSRR), Channels 1 and 2, $\pm 2.75V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

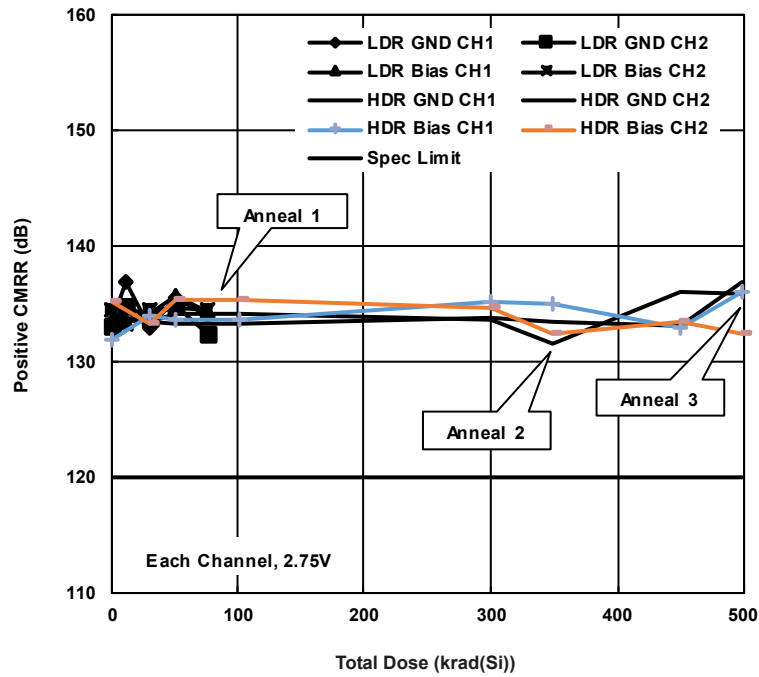


Figure 30. ISL70219ASEH positive Common-Mode Rejection Ratio (CMRR), Channels 1 and 2, $\pm 3.0V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

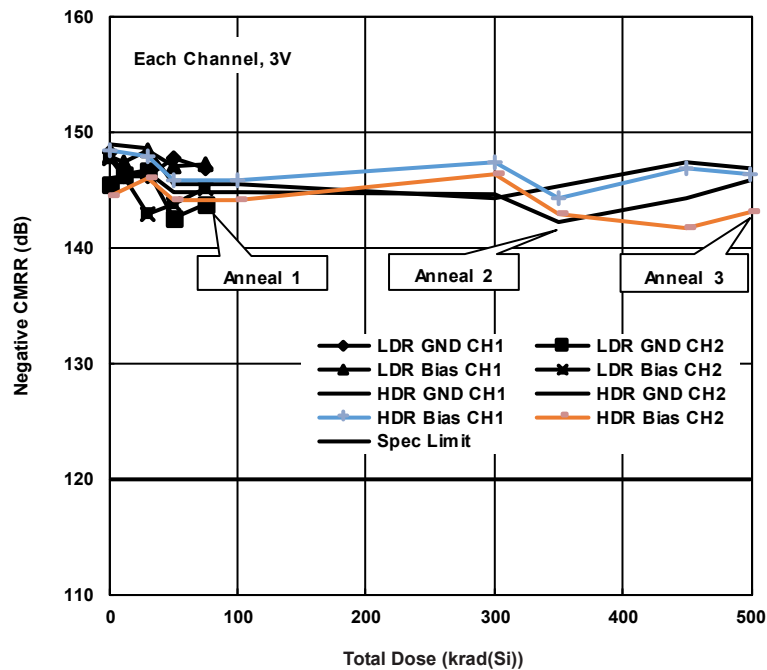


Figure 31. ISL70219ASEH negative Common-Mode Rejection Ratio (CMRR), Channels 1 and 2, $\pm 3.0V$ supplies, as a function of total dose irradiation at low and high dose rate for the biased and unbiased cases. The dose rate was 0.01rad(Si)/s for low dose rate irradiation and 60rad(Si)/s for high dose rate irradiation. Sample size for the LDR cells was 16 and sample size for the HDR cells was 12. Anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate. See [“Attributes Data” on page 2](#). The post-irradiation SMD limit is 120dB minimum.

4. Discussion and Conclusion

This document describes the results of low and high dose rate testing of the ISL70219ASEH dual operational amplifier. Parts were tested at low and high dose rate under biased (see [Figure 1](#)) and unbiased (grounded) conditions per MIL-STD-883 Test Method 1019.7, at 0.01rad(Si)/s and 50rad(Si)/s respectively. The low dose rate test was run to 50krad(Si) ; the high dose rate test was run to 450krad(Si) , representing a 1.5 times ‘overtest’ of its 300krad(Si) rating. High temperature biased anneals were performed after 50krad(Si) at low dose rate and after 300krad(Si) and 450krad(Si) at high dose rate.

All samples met the SMD post-radiation specifications at all downpoints. No differences in total dose response were noted between biased and grounded irradiation. Additionally, no channel-to-channel differences were noted, either in the pre-irradiation data or in the total dose response of the parts. We did note dose rate sensitivity in the input bias current ([Figures 3, 4, 22, and 23](#)), and the part must hence be considered dose rate sensitive. The ISL70219ASEH is acceptance tested on a wafer-by-wafer basis to 300krad(Si) at high dose rate (50rad(Si)/s - 300rad(Si)/s) and to 50krad(Si) at low dose rate (0.01rad(Si)/s), providing hardness assurance at both dose rates. [Table 1 on page 3](#) summarizes the results, and we will discuss these for each parameter.

The input offset voltage at $\pm 18V$ ([Figure 2](#)) was stable over both dose rates and showed little anneal response after the three anneals, while still remaining well within the post-radiation SMD limits of $-110\mu V$ to $110\mu V$.

The positive and negative input bias currents at $\pm 18V$ ([Figures 3 and 4](#)) were stable over high dose rate irradiation but showed a substantial increase over low dose rate. The parameters remained within the post-irradiation specification limits but the part is considered low dose rate sensitive based on the ‘delta parameter’ diagnostic algorithm outlined in MIL-STD-883 test method 1019. The post low dose rate anneal response was negative, that is, back to the near-zero

pre-irradiation values, while the post high dose rate anneal response was positive, indicating further degradation. The post-anneal values remained within the SMD post-radiation limits.

The input offset current at $\pm 18\text{V}$ (Figure 5) was very stable over low and high dose rate irradiation and showed little anneal response and no dose rate sensitivity. This is in contrast with the input bias current results and may be interpreted as the absolute value of gain (beta) of the input pair transistors being dose rate sensitive while the beta *match* is not.

The positive open-loop gain at $\pm 18\text{V}$ (Figure 6) was stable at all downpoints. The negative open-loop gain (Figure 7) showed considerable variation including anneal responses in the direction of *higher* gain. The parameters remained well above the 129.5dB SMD limit at all downpoints, and the results may well be indicative of testing issues for this parameter and not of any effects of ^{60}Co irradiation.

The positive and negative power supply rejection ratio at $\pm 18\text{V}$ (Figures 8 and 9) and common-mode rejection ratio at $\pm 18\text{V}$ (Figures 10 and 11) were stable at both dose rates and over anneals and remained well within the SMD limits.

The sourcing and sinking output short-circuit currents at $\pm 18\text{V}$ (Figures 12 and 13) were stable at both dose rates and over all three anneals. These two parameters are not specified in the SMD, and we used the data sheet 'typical' specifications of 10.8mA and -19.0mA, respectively.

The positive and negative supply currents at $\pm 18\text{V}$ (Figure 14) were very stable at both dose rates and remained well within the SMD limits. Figure 14 plots the *sum* of both channels.

The high and low output voltages at $\pm 18\text{V}$ (Figures 15 and 16) were very stable at both dose rates and after all three anneals and remained well within the SMD limits.

The positive and negative slew rates at $\pm 18\text{V}$ (Figures 17 and 18) were very stable at both dose rates and after all three anneals and remained well within the SMD limits.

The rise time at $\pm 18\text{V}$ (Figure 19) was very stable at both dose rates and over anneals and remained well within the SMD limits. The fall time at $\pm 18\text{V}$ (Figure 20) showed considerable variation over low dose rate and significant responses to the three anneals. In all cases the values of this parameter were well inside the SMD post-irradiation limit of 700ns.

The input offset voltage at $\pm 5\text{V}$ (Figure 21) was stable over both dose rates and showed little anneal response after the three anneals, while still remaining well within the post-radiation SMD limits of -110 μV to 110 μV .

The positive and negative input bias currents at $\pm 5\text{V}$ (Figures 22 and 23) were stable over high dose rate irradiation but showed a substantial increase over low dose rate. The parameters remained well within the post-irradiation specification limits but the part is considered low dose rate sensitive based on the 'delta parameter' diagnostic algorithm outlined in MIL-STD-883 test method 1019. The post low dose rate anneal response was negative, that is, back to the near-zero pre-irradiation values, while the post high dose rate anneal showed very little response. The post-anneal values remained within the SMD post-radiation limits for all three anneals.

The input offset current at $\pm 5\text{V}$ (Figure 24) was very stable over low and high dose rate irradiation and showed little anneal response.

The positive and negative supply currents at $\pm 5\text{V}$ (Figure 25) were very stable at both dose rates and remained well within the SMD limits. The figure plots the sum of both channels.

The positive open-loop gain at $\pm 18\text{V}$ (Figure 26) was stable at all downpoints but showed some reduction from 300krad(Si) to 450krad(Si) while staying well within the SMD limits. The negative open-loop gain (Figure 27) showed considerable variation including anneal responses in the direction of *higher* gain, as also encountered for the $\pm 18\text{V}$ data. The parameters remained well above the 129.5dB SMD limit at all downpoints, and the results may be indicative of testing issues as discussed earlier.

The positive and negative power supply rejection ratio at $\pm 2.75\text{V}$ (Figures 28 and 29) and common-mode rejection ratio at $\pm 2.75\text{V}$ (Figures 30 and 31) were stable at both dose rates and over anneals and remained well within the SMD limits.

We conclude that the ISL70219ASEH shows good performance over low and high dose rate irradiation and subsequent anneals, with data taken at several supply voltages. No major differences in total dose response were noted between

biased and grounded irradiation for any parameters. Additionally, no channel-to-channel differences were noted, either in the pre-irradiation data or in the total dose response of the parts. We did note clear low dose rate sensitivity in the input bias current results, and the part is considered dose rate sensitive as a result. The ISL70219ASEH is acceptance tested at high and low dose rate on a wafer-by-wafer basis to 300krad(Si) and to 50krad(Si), respectively, providing hardness assurance at both dose rates.

5. Appendix

Table 2. Monitored Parameters and Their Post-Irradiation Limits

Figure	Parameter	Limit, Low	Limit, High	Units	Supplies	Notes
Figure 2	Input Offset Voltage	-110	+110	μV	$\pm 18\text{V}$	Channels 1 and 2
Figure 3	Positive Input Bias Current	-15	+15	nA	$\pm 18\text{V}$	Channels 1 and 2
Figure 4	Negative Input Bias Current	-15	+15	nA	$\pm 18\text{V}$	Channels 1 and 2
Figure 5	Input Offset Current	-10	+10	nA	$\pm 18\text{V}$	Channels 1 and 2
Figure 6	Positive Open-Loop Gain	129.5	-	dB	$\pm 18\text{V}$	Channels 1 and 2
Figure 7	Negative Open-Loop Gain	129.5	-	dB	$\pm 18\text{V}$	Channels 1 and 2
Figure 8	Positive Power Supply Rejection Ratio	120	-	dB	$\pm 18\text{V}$	Channels 1 and 2
Figure 9	Negative Power Supply Rejection Ratio	120	-	dB	$\pm 18\text{V}$	Channels 1 and 2
Figure 10	Positive Common-Mode Rejection Ratio	120	-	dB	$\pm 18\text{V}$	Channels 1 and 2
Figure 11	Negative Common-Mode Rejection Ratio	120	-	dB	$\pm 18\text{V}$	Channels 1 and 2
Figure 12	Output Short-Circuit Current, Sourcing	10.8 typical	-	mA	$\pm 18\text{V}$	Channels 1 and 2
Figure 13	Output Short-Circuit Current, Sinking	-19.0 typical	-	mA	$\pm 18\text{V}$	Channels 1 and 2
Figure 14	Positive and Negative Supply Current	-1.7	1.7	mA	$\pm 18\text{V}$	Sum of both channels
Figure 15	Output High Voltage	16	18	V	$\pm 18\text{V}$	Channels 1 and 2
Figure 16	Output Low Voltage	-18	-16	V	$\pm 18\text{V}$	Channels 1 and 2
Figure 17	Positive Slew Rate	0.2	-	V/ μs	$\pm 18\text{V}$	Channels 1 and 2
Figure 18	Negative Slew Rate	0.2	-	V/ μs	$\pm 18\text{V}$	Channels 1 and 2
Figure 19	Rise Time	-	625	ns	$\pm 18\text{V}$	Channels 1 and 2
Figure 20	Fall Time	-	700	ns	$\pm 18\text{V}$	Channels 1 and 2
Figure 21	Input Offset Voltage	-250	250	μV	$\pm 5\text{V}$	Channels 1 and 2
Figure 22	Positive Bias Current	-15	15	nA	$\pm 5\text{V}$	Channels 1 and 2
Figure 23	Negative Bias Current	-15	15	nA	$\pm 5\text{V}$	Channels 1 and 2
Figure 24	Input Offset Current	-10	10	nA	$\pm 5\text{V}$	Channels 1 and 2
Figure 25	Positive and Negative Supply Current	-1.6	1.6	mA	$\pm 5\text{V}$	Sum of both channels
Figure 26	Positive Open-Loop Gain	129.5	-	dB	$\pm 5\text{V}$	Channels 1 and 2
Figure 27	Negative Open-Loop Gain	129.5	-	dB	$\pm 5\text{V}$	Channels 1 and 2
Figure 28	Positive Power Supply Rejection Ratio	120	-	dB	$\pm 5\text{V}$	Channels 1 and 2
Figure 29	Negative Power Supply Rejection Ratio	120	-	dB	$\pm 5\text{V}$	Channels 1 and 2
Figure 30	Positive Common-Mode Rejection Ratio	120	-	dB	$\pm 5\text{V}$	Channels 1 and 2
Figure 31	Negative Common-Mode Rejection Ratio	120	-	dB	$\pm 5\text{V}$	Channels 1 and 2

6. Revision History

Date	Rev.	Description
May 23, 2018	0.00	Initial release.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338