

ISL71830SEH

Total Dose Testing

TR020

Rev 0.00

November 10, 2015

Introduction

This report summarizes the results of a total dose test of the [ISL71830SEH](#) 16-channel low voltage analog multiplexer. The test was conducted in order to determine the sensitivity of the part to the total dose environment. Irradiation under bias and with all pins grounded and subsequent high temperature anneals are complete.

Reference Documents

- MIL-STD-883 test method 1019
- [ISL71830SEH](#) datasheet.
- DLA Land and Maritime Standard Microcircuit Drawing (SMD) [5962-15247](#)

Part Description

The ISL71830SEH is a radiation tolerant 16-channel analog multiplexer that is fabricated using Intersil's proprietary P6SOI (Silicon on Insulator) process technology to provide excellent latch-up performance. The part operates over a single supply range from 3.3V to 5V and has four digital address inputs plus an enable pin that can be driven with adjustable logic thresholds to select one of 16 available channels. Inactive channels are isolated from the active channel by a high impedance, which inhibits any interaction between them.

The ISL71830SEH's low switch ON-resistance allows improved signal integrity and reduced power losses. The ISL71830SEH is also designed for cold sparing making it compatible with redundancy techniques in high reliability applications. The part is designed to provide a high impedance to the analog source in a powered OFF condition, making it easy to add additional backup devices without incurring extra power dissipation. The ISL71830SEH also has analog overvoltage protection on the switch inputs that disables the switch during an overvoltage event to protect upstream and downstream devices. All inputs are Electrostatic Discharge (ESD) protected to 5kV Human Body Model (HBM).

The ISL71830SEH is available in a 28 Ld Ceramic Dual Flatpack (CDFP) and operates over the extended temperature range of -55°C to +125°C. The ISL71831SEH is a 32-channel version of the ISL71830SEH and is available in a 48 Ld Ceramic Quad Flatpack (CQFP); please refer to the [ISL71831SEH](#) datasheet for further information.


Test Description

Irradiation Facilities

Irradiation was performed using a Hopewell Designs N40 panoramic low dose rate ⁶⁰Co irradiator located in the Palm Bay, Florida Intersil facility. The irradiations were performed at 8.554mrad(Si)/s to 9.322mrad(Si)/s in accordance with MIL-STD-883 Test Method 1019. A PbAl box was used to shield the test board and devices under test against low energy secondary gamma radiation. The high temperature anneal was performed under bias at +100°C for 168 hours.

Test Fixturing

[Figure 1 on page 2](#) shows the configuration and power supply sequencing used for biased irradiation.

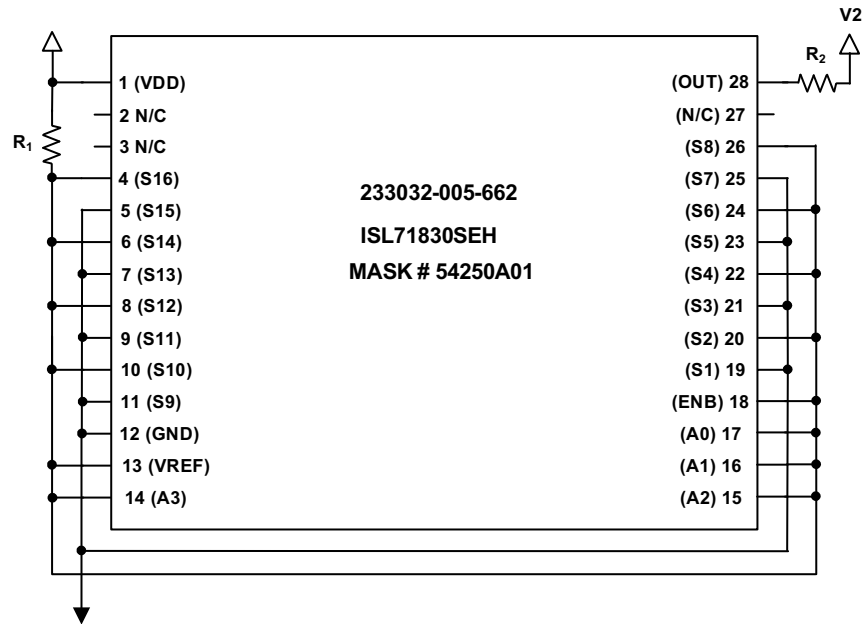

1. $V1 = +5.5V, \pm 0.1V$
2. $V2 = +2.75V, \pm 0.1V$
3. R_1 and $R_2 = 1\Omega, \pm 5\%, \frac{1}{4}$ Watt (Per socket)
4. Socket is 28 pin flatpack (Sensata 628-0282315)
5. Power-on sequence is $V1$ followed by $V2$
6. Power-off sequence is $V2$ then $V1$

FIGURE 1. IRRADIATION BIAS CONFIGURATION AND POWER SUPPLY SEQUENCING FOR THE ISL71830SEH

Characterization Equipment and Procedures

All electrical testing was performed outside the irradiator using production Automated Test Equipment (ATE) with data logging of all parameters at each downpoint. All downpoint electrical testing was performed at room temperature.

Experimental Matrix

Testing proceeded in accordance with the guidelines of MIL-STD-883 Test Method 1019. The experimental matrix consisted of 16 samples irradiated at low dose rate with all pins grounded and 16 samples irradiated at low dose rate under bias (four control units were used).

Samples of the ISL71830SEH were drawn from development lot J69526 and were packaged in the production hermetic 28-pin ceramic flatpack package outline K28.A. The samples were processed through the standard burn in cycle and were screened to the SMD 5962-15247 limits at room, low and high temperature before irradiation.

Downpoints

Downpoints were zero, 10krad(Si), 30krad(Si), 50krad(Si) and 75krad(Si). All samples were subjected to a high temperature biased anneal for 168 hours at $+100^\circ\text{C}$ following irradiation

Results

Attributes Data

Total dose testing of the ISL71830SEH is complete and showed no reject devices after irradiation up to 75krad(Si) or after the post-75krad(Si) irradiation anneal. [Table 1](#) summarizes the results.

TABLE 1. ISL71830SEH TOTAL DOSE TEST ATTRIBUTES DATA

DOSE RATE	BIAS	SAMPLE SIZE	DOWNPOINT	BIN 1 (Note 1)	REJECTS
8.554mrad(Si)/s to 9.322mrad(Si)/s	Figure 1	16	Pre-irradiation	16	
			10krad(Si)	16	0
			30krad(Si)	16	0
			50krad(Si)	16	0
			75krad(Si)	16	0
			Anneal, 168 hours at +100 °C (Note 2)	16	0
8.554mrad(Si)/s to 9.322mrad(Si)/s	Grounded	16	Pre-irradiation	16	
			10krad(Si)	16	0
			30krad(Si)	16	0
			50krad(Si)	16	0
			75krad(Si)	16	0
			Anneal, 168 hours at +100 °C (Note 2)	16	0

NOTES:

1. Bin 1 indicates a device that passes all pre-irradiation specification limits.
2. The 168 hours anneal was performed at +100 °C using the bias configuration shown in [Figure 1](#).

Variables Data

The plots in [Figures 2](#) through [22](#) show data at all downpoints. The plots show the average of key parameters as a function of total dose for each of the two irradiation conditions. Many of the plots show the total dose response of the average of parameters, such as ON-resistance and the various leakage parameters for

each of the 16 channels in order to facilitate the interpretation of the results as well as managing the length of this report. All samples showed excellent stability over irradiation. See the [“Conclusion” on page 15](#) for further discussion.

Variables Data Plots

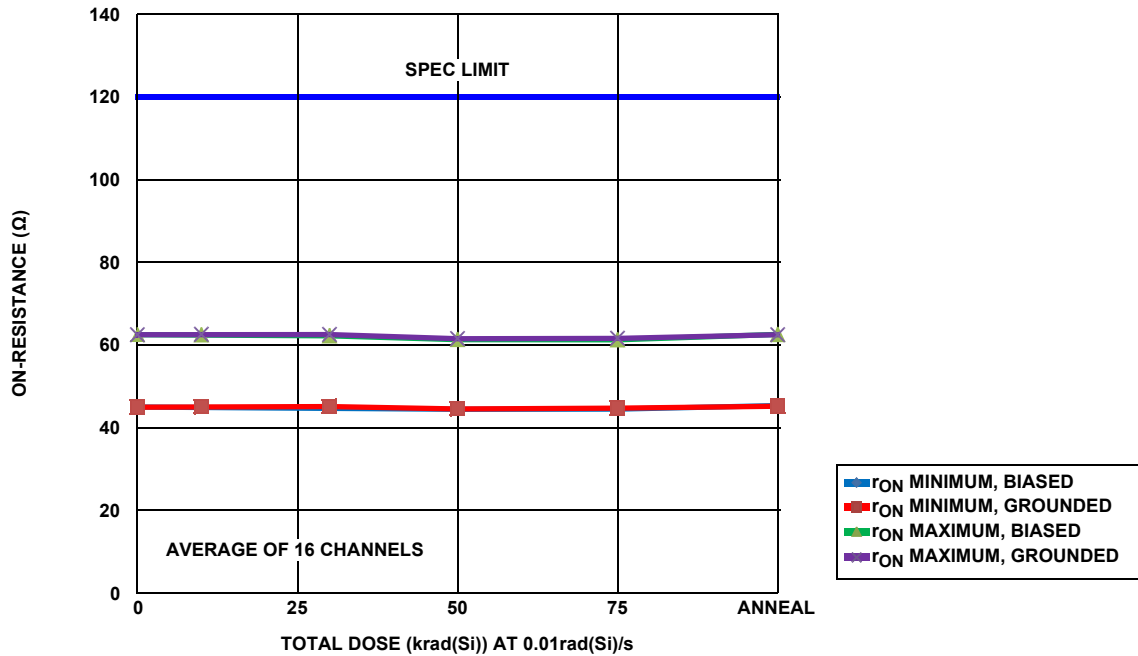


FIGURE 2. ISL71830SEH minimum and maximum switch ON-resistance, average of 16 channels, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per [Figure 1](#)) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is 120Ω maximum.

Variables Data Plots (Continued)

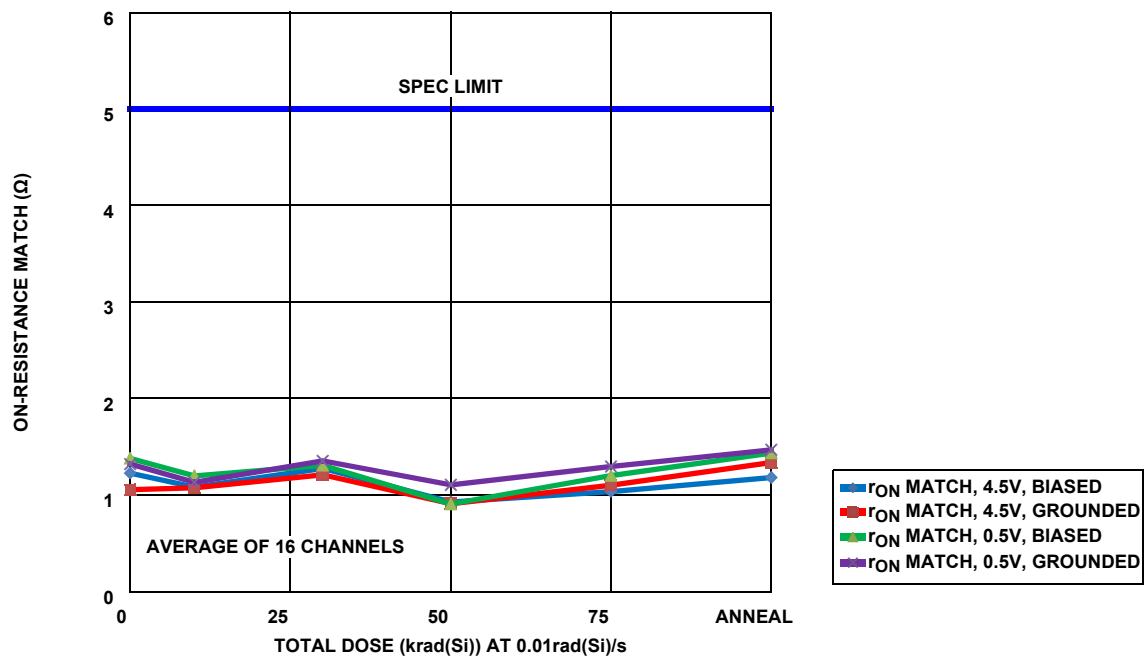


FIGURE 3. ISL71830SEH switch ON-resistance match, average of 16 channels, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is 5Ω maximum.

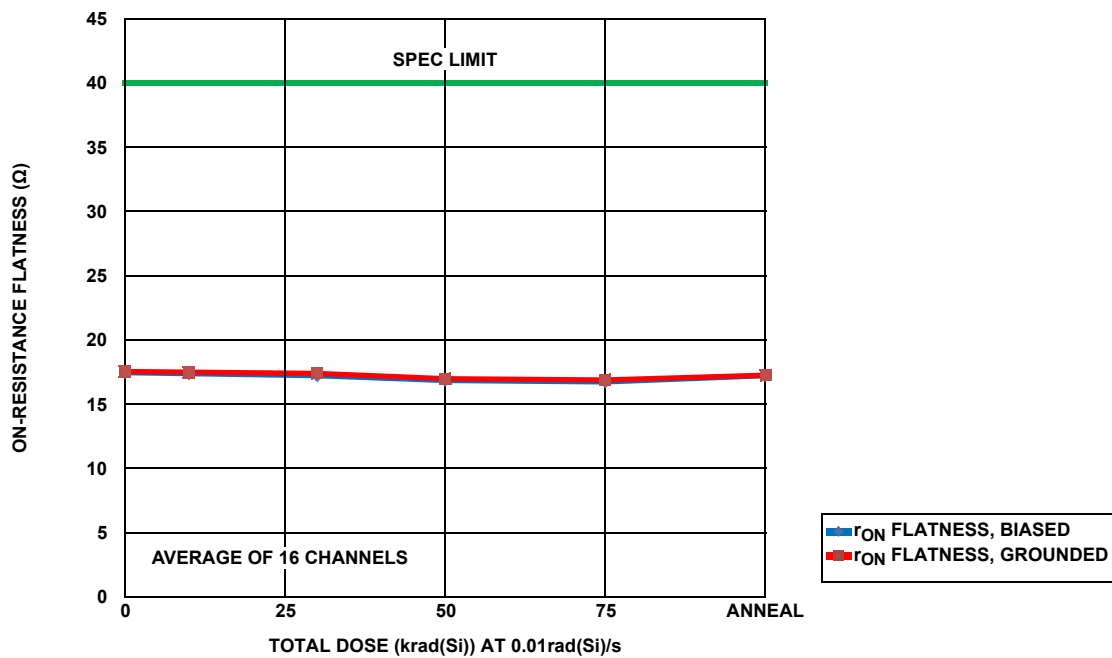


FIGURE 4. ISL71830SEH ON-resistance flatness, average of 16 channels, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is 40Ω maximum.

Variables Data Plots (Continued)

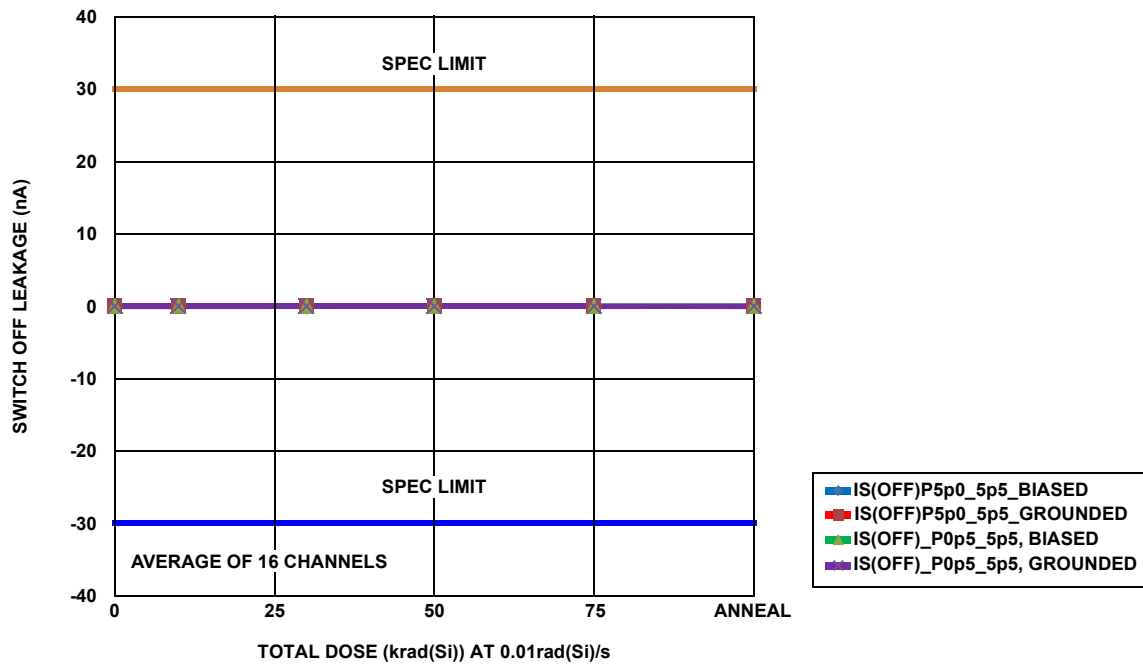


FIGURE 5. ISL71830SEH switch input OFF leakage, average of all 16 channels, 5.5V supply, input voltage to selected switch 5V or 0.5V, output and all unselected inputs at 0.5V, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is -30µA to 30µA.

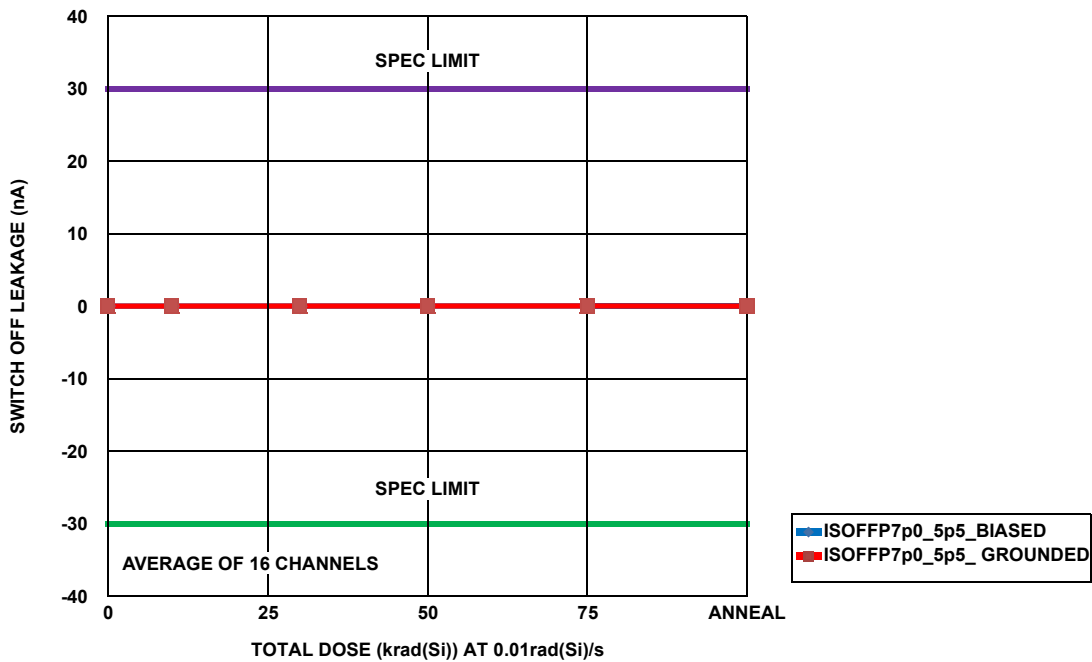


FIGURE 6. ISL71830SEH switch input overvoltage OFF leakage, average of all 16 channels, 5.5V supply, input voltage to selected switch 7V, output and all unselected inputs at 0.0V as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is -30µA to 30µA.

Variables Data Plots (Continued)

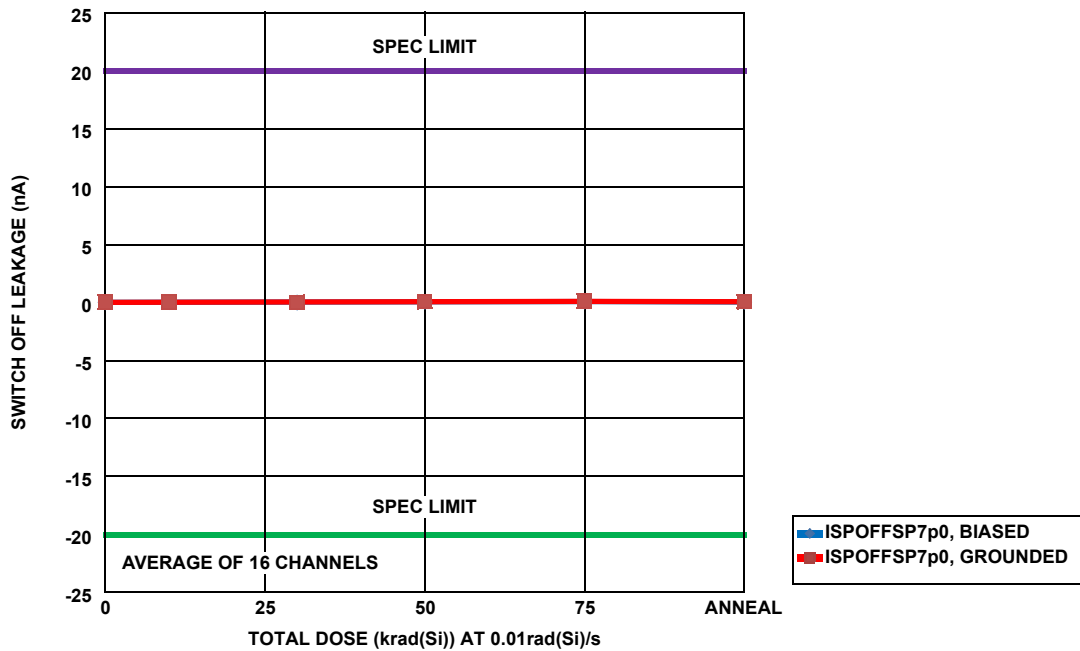


FIGURE 7. ISL71830SEH 'supplies off' switch OFF leakage into the input of an unselected channel, average of all 16 channels, supplies, address pins, enable pin and unselected inputs grounded, input voltage to selected switch 7V as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is -20µA to 20µA.

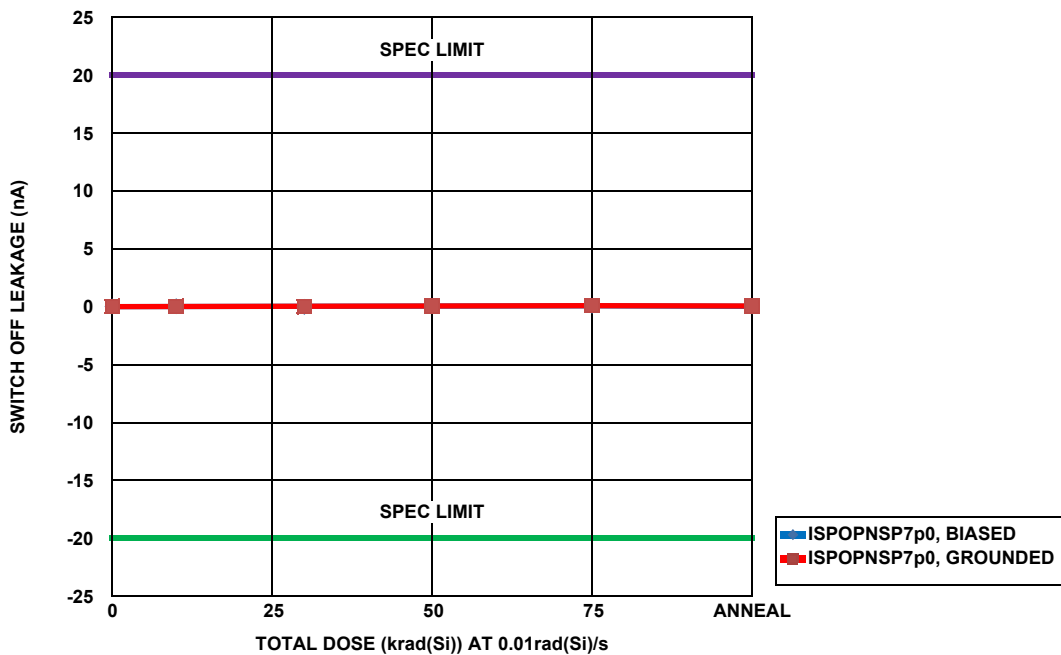


FIGURE 8. ISL71830SEH 'supplies open' switch OFF leakage into the input of an unselected channel, supplies, address pins, enable pin and unselected inputs grounded, input voltage to selected switch 7V and average of all 16 channels, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is -20µA to 20µA.

Variables Data Plots (Continued)

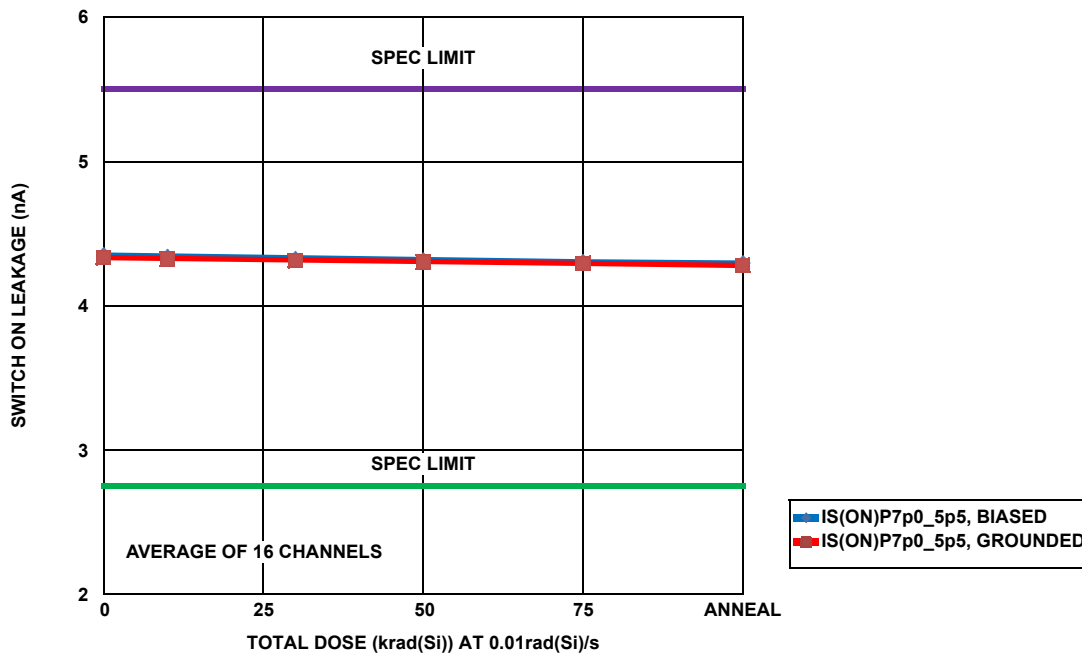


FIGURE 9. ISL71830SEH 'overvoltage' switch ON leakage into a selected channel, average of all 16 channels, 5.5V supply, input voltage to selected switch 7V, output open and unselected inputs at 0.0V, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is 2.75µA to 5.5µA.

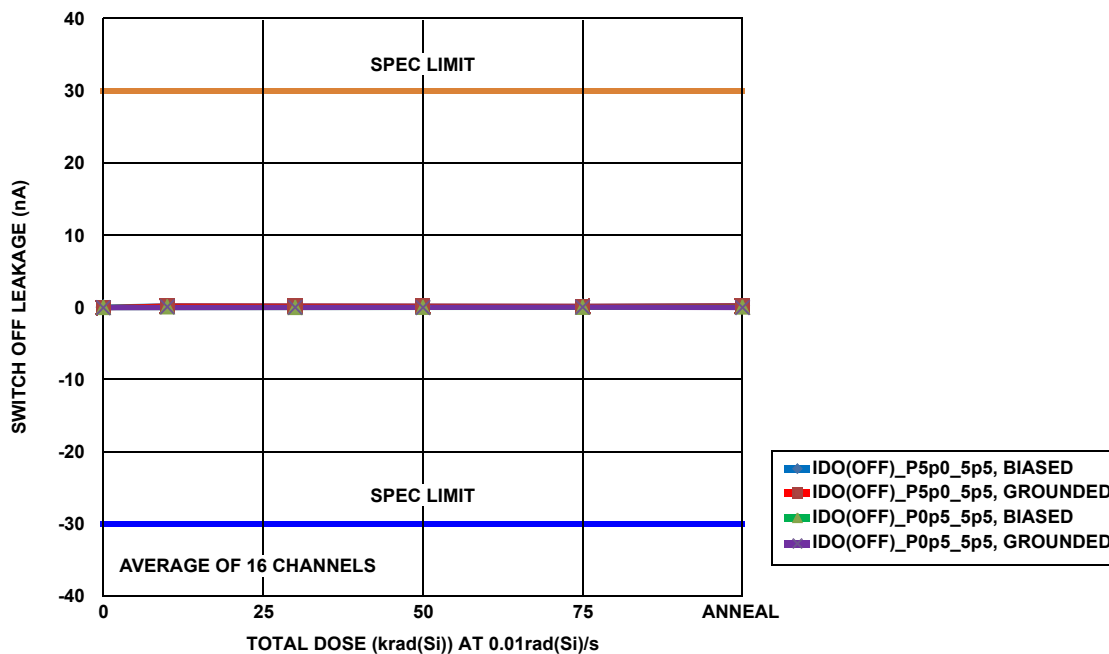


FIGURE 10. ISL71830SEH switch OFF leakage into the multiplexer output, 5.5V supply, input voltage 0.5V or 5V and output voltage 5V or 0.5V as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is -30µA to 30µA.

Variables Data Plots (Continued)

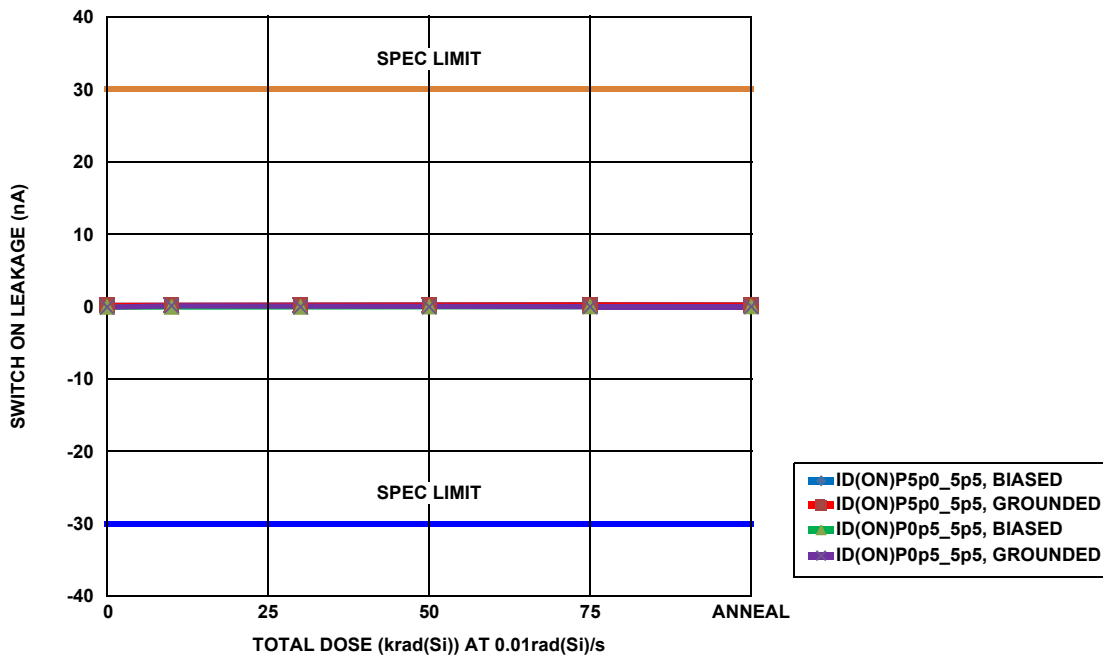


FIGURE 11. ISL71830SEH switch ON leakage into the input and output for a selected switch, average of all 16 channels, 5.5V supply, selected input and output at 0.5V or 5V and unselected inputs at 5V or 0.5V, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is -30µA to 30µA.

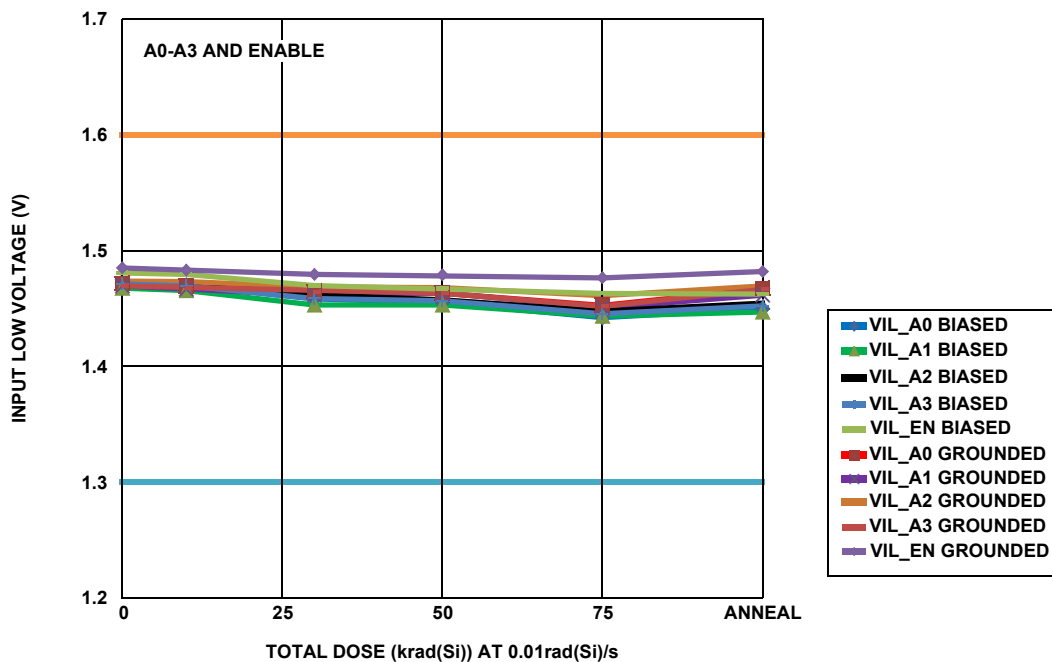


FIGURE 12. ISL71830SEH input LOW voltage, address pins A0 through A3 and Enable pin as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are 1.3V to 1.6V.

Variables Data Plots (Continued)

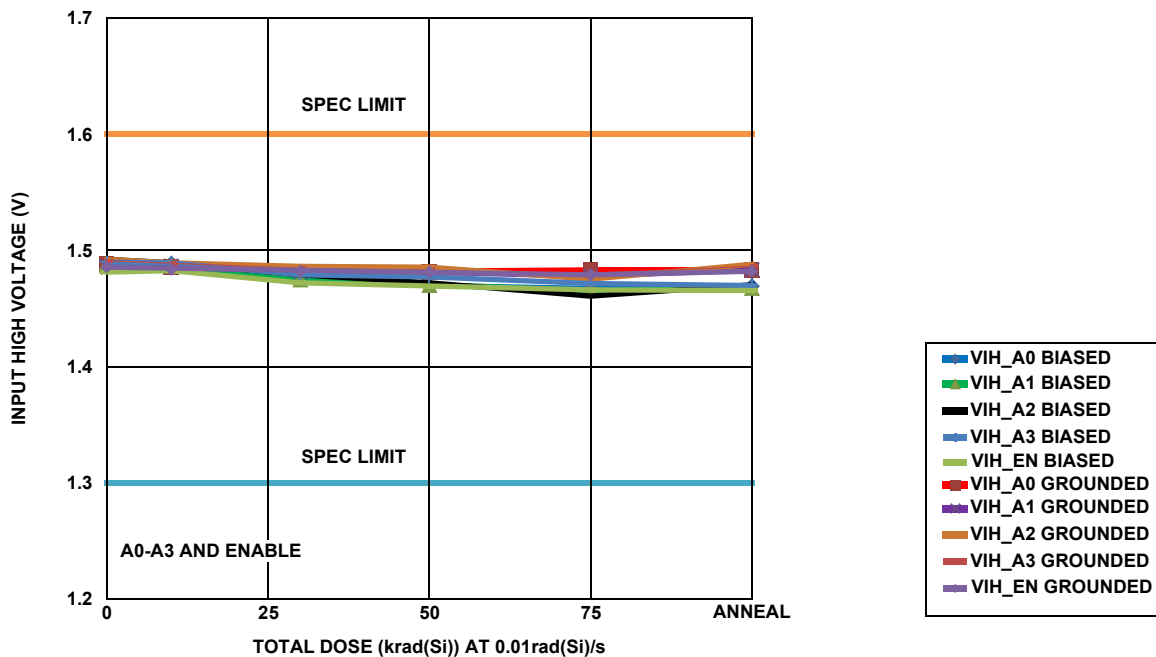


FIGURE 13. ISL71830SEH input HIGH voltage, address pins A0 through A3 and Enable pin, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are 1.3V to 1.6V.

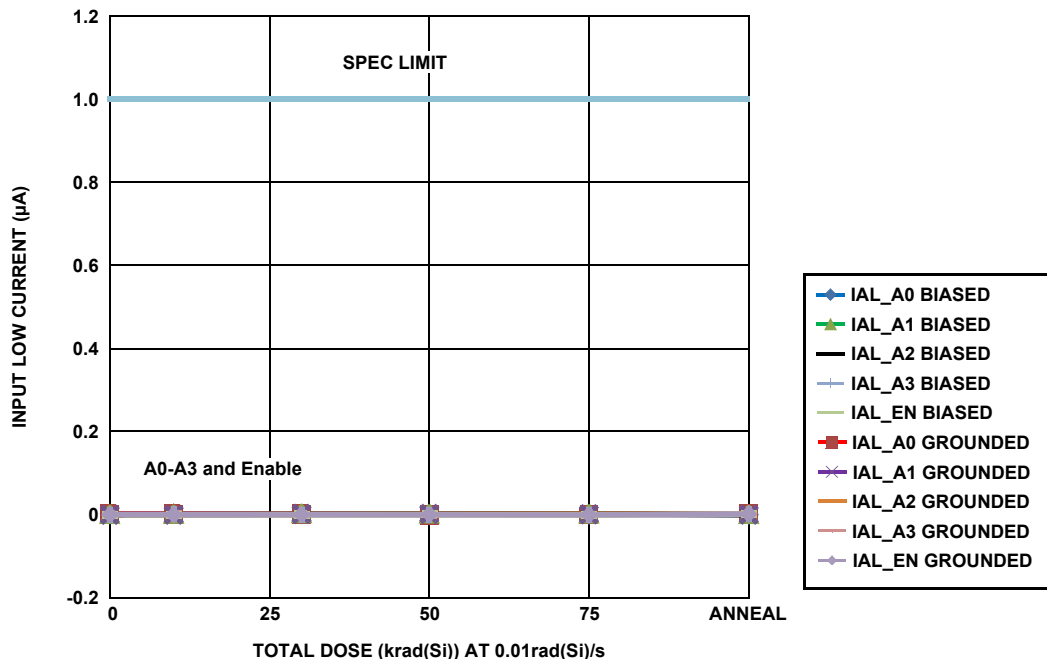


FIGURE 14. ISL71830SEH input LOW current, address pins A0 through A3 and Enable pin, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are -0.1µA to 0.1µA.

Variables Data Plots (Continued)

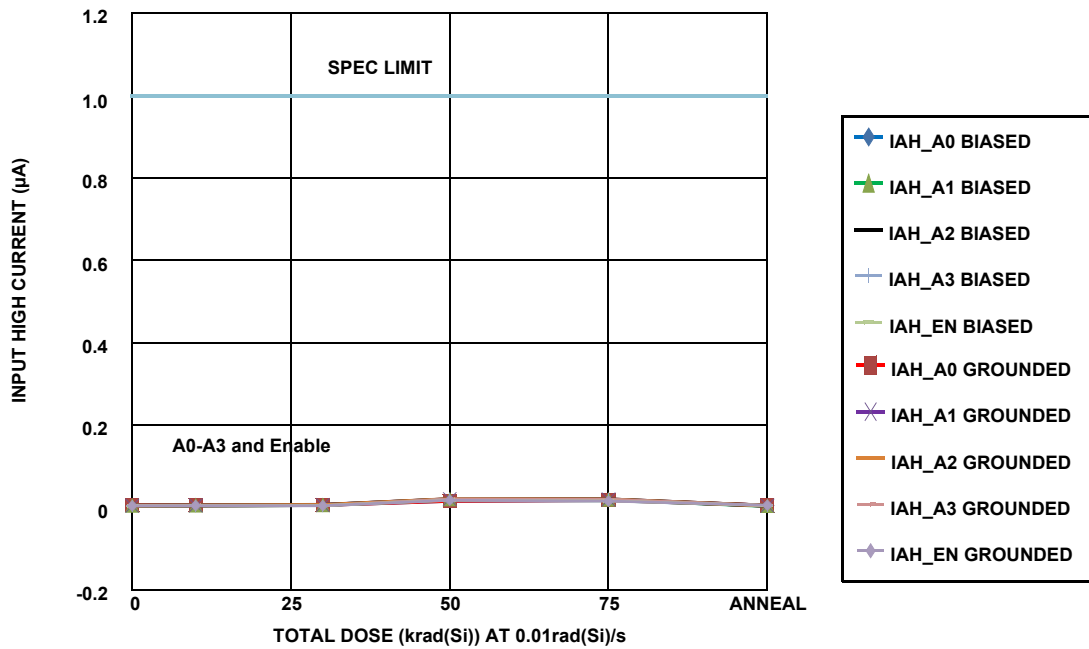


FIGURE 15. ISL71830SEH input HIGH current, address pins A0 through A3 and Enable pin, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are -0.1µA to 0.1µA.

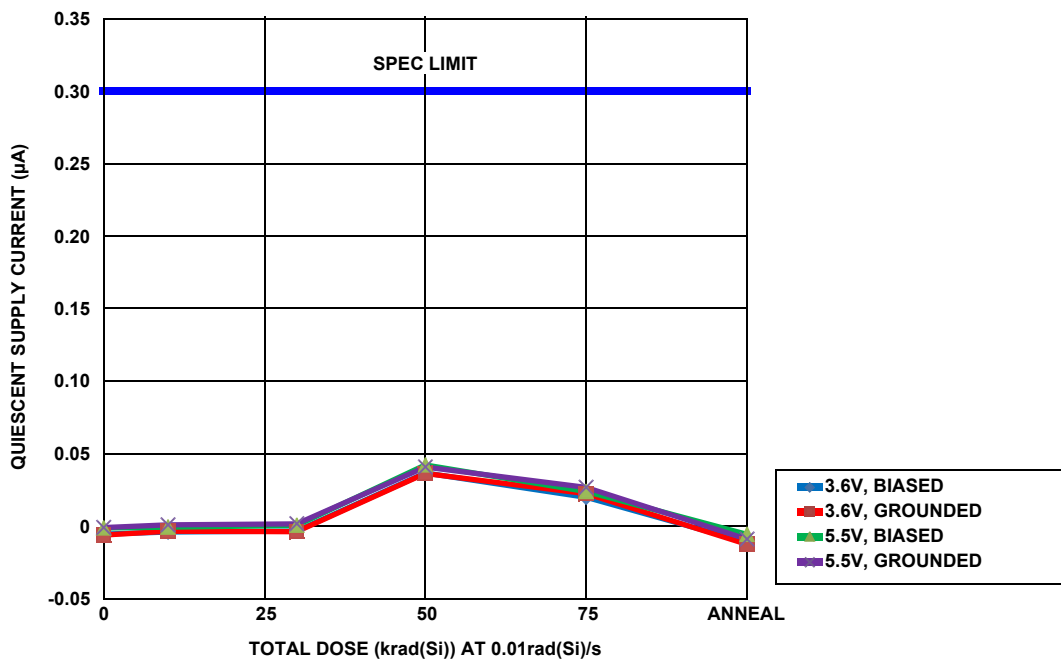


FIGURE 16. ISL71830SEH quiescent supply current, 3.6V and 5.5V supply and V_{REF} voltage, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is 0.3µA maximum for both voltages.

Variables Data Plots (Continued)

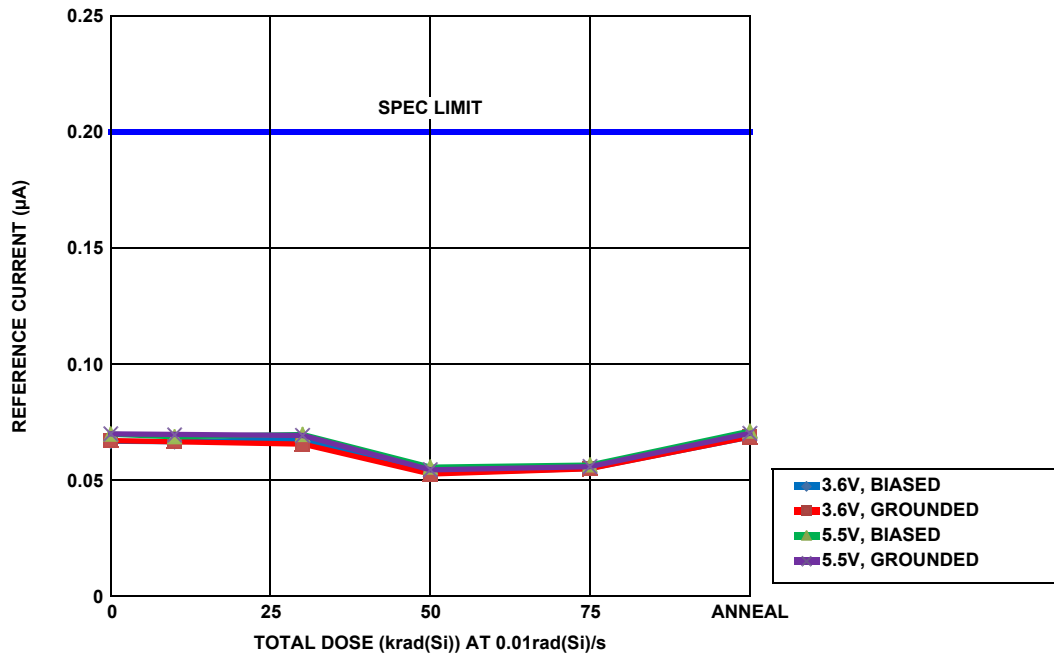


FIGURE 17. ISL71830SEH reference supply current, 3.6V and 5.5V supply and V_{REF} voltage as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limit is 0.2µA maximum for both voltages.

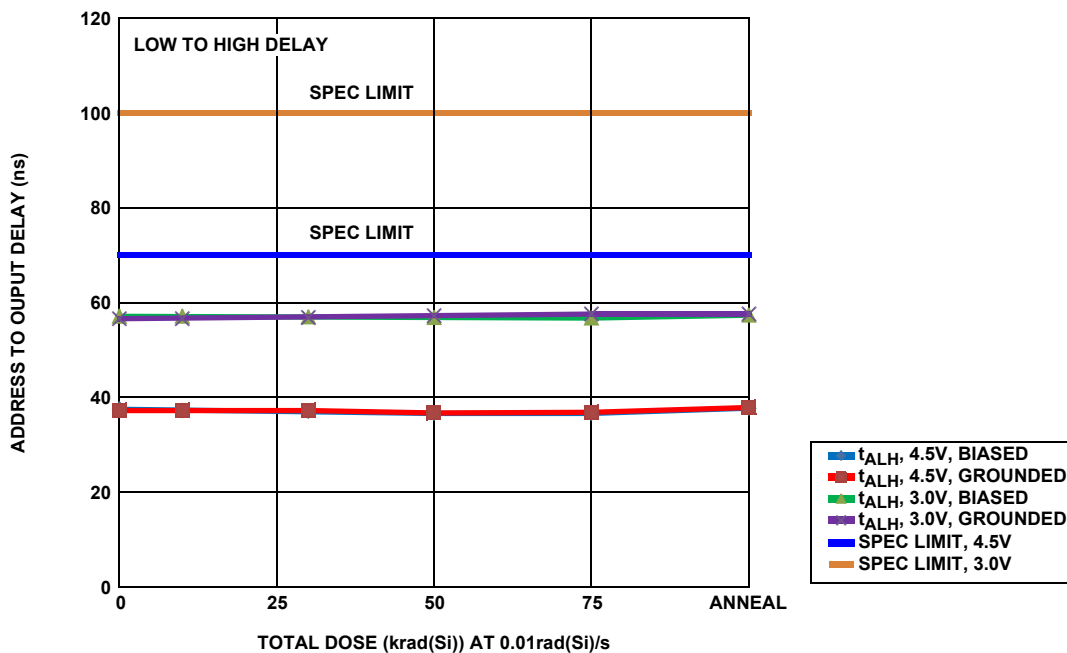


FIGURE 18. ISL71830SEH address input to multiplexer output delay, LOW to HIGH as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are 70ns maximum (4.5V) and 100ns maximum (3.0V).

Variables Data Plots (Continued)

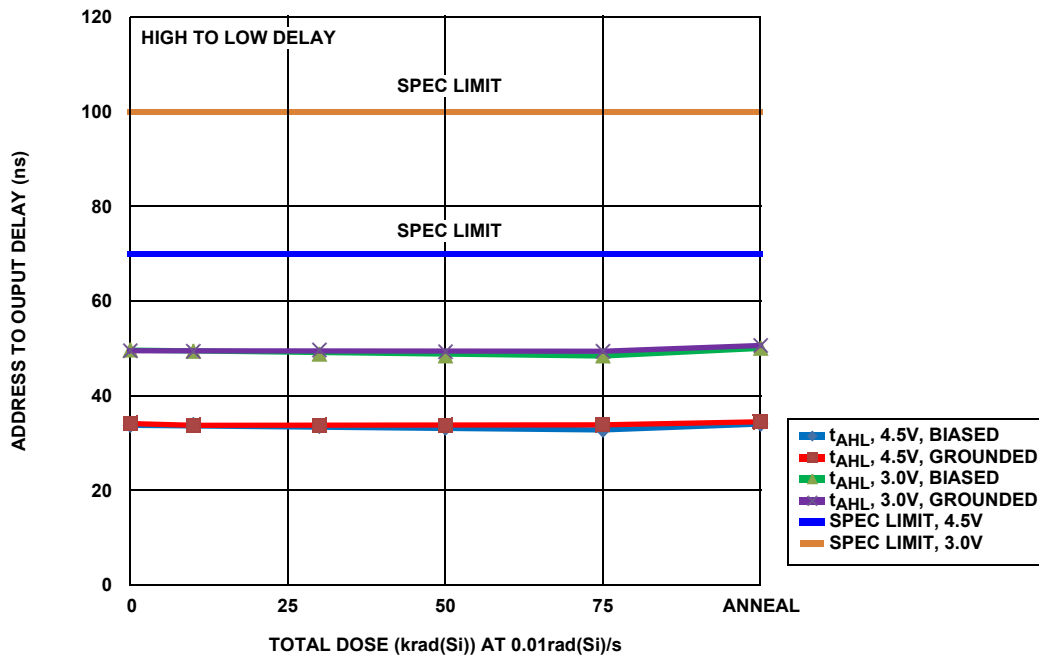


FIGURE 19. ISL71830SEH address input to multiplexer output delay, HIGH to LOW, as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are 70ns maximum (4.5V) and 100ns maximum (3.0V).

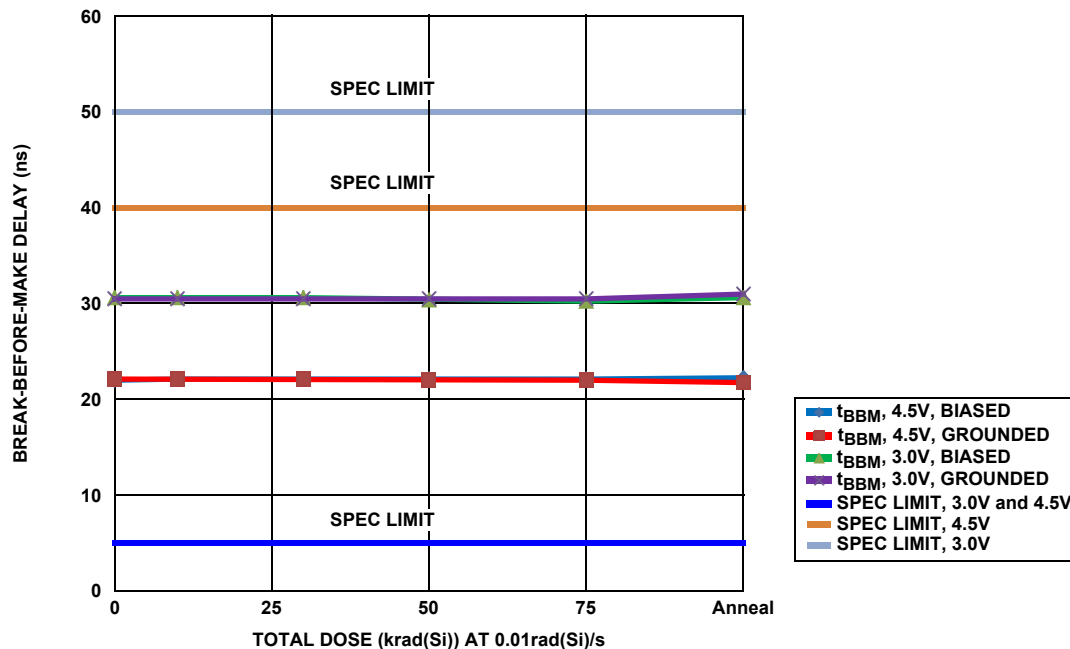


FIGURE 20. ISL71830SEH Break-Before-Make (BBM) delay as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are 5ns minimum and 40ns maximum (4.5V) and 5ns minimum and 50.0ns maximum (3.0V).

Variables Data Plots (Continued)

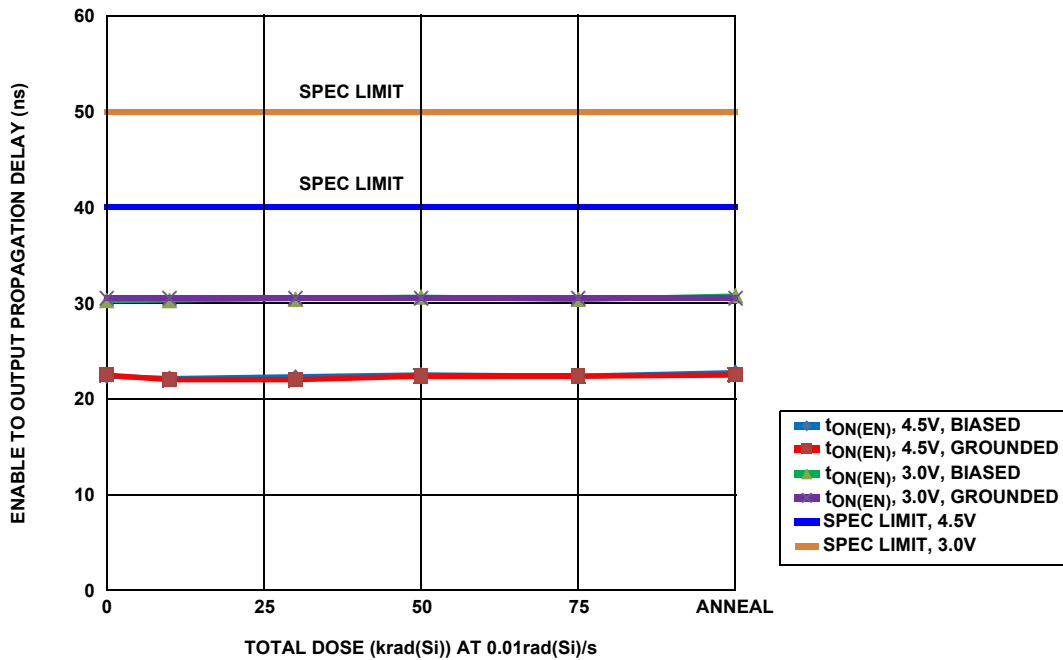


FIGURE 21. ISL71830SEH enable ON to multiplexer output propagation delay as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are 40ns maximum (4.5V) and 50ns maximum (3.0V).

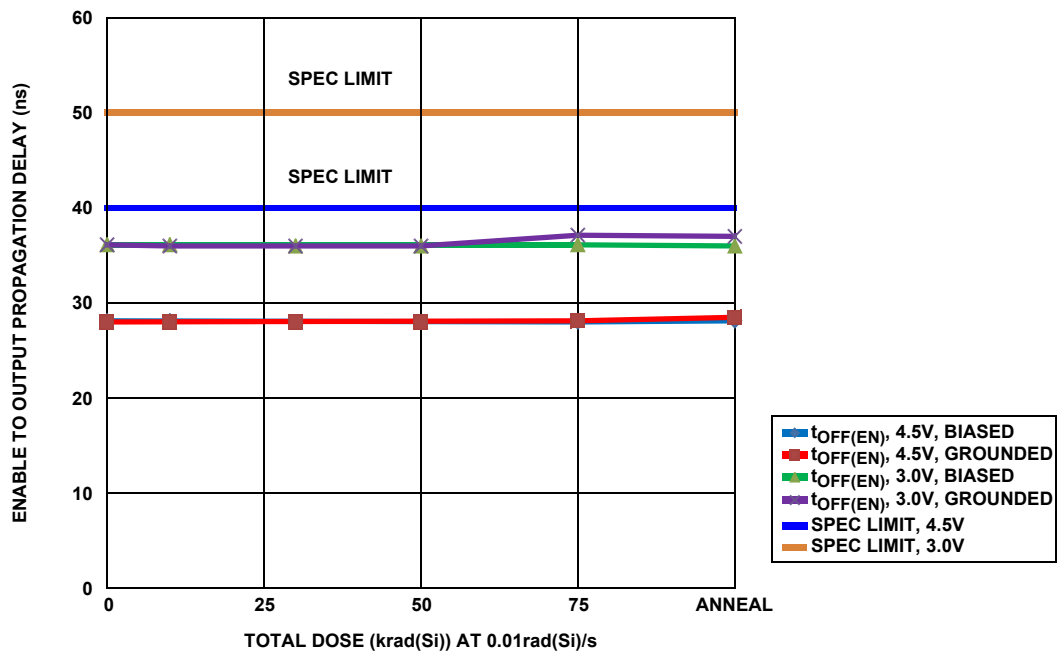


FIGURE 22. ISL71830SEH enable OFF to multiplexer output propagation delay as a function of low dose rate total dose irradiation for the unbiased (all pins grounded) and the biased (per Figure 1) cases. The dose rate was 8.554mrad(Si)/s to 9.322mrad(Si)/s. Sample size for each of the two cells was 16. The post-irradiation SMD limits are 40ns maximum (4.5V) and 50ns maximum (3.0V).

Conclusion

This document reports results of a low dose rate total dose test of the ISL71830SEH 16-channel analog multiplexer. Parts were tested at low dose rate underbiased and unbiased conditions as outlined in MIL-STD-883 Test Method 1019.7. The samples were also taken through a high temperature biased anneal at +100 °C for 168 hours.

ATE characterization testing at downpoints showed no rejects to the SMD Group A limits after biased and grounded irradiation at low dose rate or after the high temperature anneal. Attributes data is presented in [Table 1](#), while variables data for selected parameters is presented in [Figure 2](#) through [22](#). All parameters showed excellent stability.

TABLE 2. REPORTED PARAMETER

FIGURE	PARAMETER	LIMIT LOW	LIMIT HIGH	UNIT	NOTES
2	Switch ON-resistance	-	120	Ω	
3	Switch ON-resistance match	-	5	Ω	
4	Switch ON-resistance flatness	-	40	Ω	
5	Switch input OFF leakage	-30	30	nA	
6	Switch input OFF leakage	-30	30	nA	Overvoltage
7	Switch input OFF leakage	-20	20	nA	Supplies grounded
8	Switch input OFF leakage	-20	20	nA	Supplies open
9	Switch input ON leakage	2.75	5.5	μA	
10	Switch output OFF leakage	-30	30	nA	
11	Switch output ON leakage	-30	30	nA	
12	Logic input LOW voltage	1.3	1.6	V	
13	Logic input HIGH voltage	1.3	1.6	V	
14	Logic input LOW current	-0.1	0.1	μA	
15	Logic input HIGH current	-0.1	0.1	μA	
16	Quiescent supply current	-	0.3	μA	
17	VREF supply current	-	0.2	μA	
18	Address input to output delay	-	70/100	ns	LOW to HIGH, 4.5V/3.0V
19	Address input to output delay	-	70/100	ns	HIGH to LOW, 4.5V/3.0V
20	Break before make delay	5	40/50	ns	4.5V/3.0V
21	Enable ON to output delay	-	40/50	ns	4.5V/3.0V
22	Enable OFF to output delay	-	40/50	ns	4.5V/3.0V

NOTE:

- Limits are taken from Standard Microcircuit Drawing (SMD) 5962-15247.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

Renesas Electronics America Inc.
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics Canada Limited
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH
Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5338