

JUNCTION FIELD EFFECT TRANSISTOR 2SK660

N-CHANNEL SILICON JUNCTION FIELD EFFECT TRANSISTOR FOR IMPEDANCE CONVERTER OF ECM

DESCRIPTION

The 2SK660 is suitable for converter of ECM.

FEATURES

- · Compact package
- High forward transfer admittance | yfs | = 1200 μ S TYP. (VDs = 5 V, ID = 0 μ A)
- Low capacitance

Ciss = 4.5 pF (VDS = 5 V, VGS = 0 V, f = 1 MHz)

• Includes diode and high resistance at G - S


ORDERING INFORMATION

PART NUMBER	PACKAGE		
2SK660	SST		

ABSOLUTE MAXIMUM RATINGS (TA = 25°C)

Drain to Source Voltage Note	VDSX	20	V
Gate to Drain Voltage	Vgdo	-20	V
Drain Current	lo	10	mΑ
Gate Current	lg	10	mΑ
Total Power Dissipation	Рт	100	mW
Junction Temperature	Tj	125	°C
Storage Temperature	T _{stg}	-55 to +125	°C

EQUIVALENT CIRCUIT



Note $V_{GS} = -1.0 \text{ V}$

Remark Please take care of ESD (Electro Static Discharge) when you handle the device in this document.


The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.



ELECTRICAL CHARACTERISTICS (TA = 25°C)

CHARACTERISTICS	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Zero Gate Voltage Drain Cut-off Current	Ipss	VDS = 5.0 V, VGS = 0 V	60		500	μΑ
Gate Cut-off Voltage	V _{GS(off)}	$V_{DS} = 5.0 \text{ V}, I_{D} = 1.0 \mu\text{A}$			-1.0	V
Forward Transfer Admittance	y fs1	$V_{DS} = 5.0 \text{ V}, \text{ ID} = 30 \ \mu\text{A}, \text{ f} = 1.0 \text{ kHz}$	150			μS
Forward Transfer Admittance	y fs2	V _{DS} = 5.0 V, V _{GS} = 0 V, f = 1.0 kHz	150	1200		μS
Input Capacitance	Ciss	Vps = 5.0 V		4.5	6.0	pF
Output Capacitance	Coss	Ves = 0 V		1.5	3.0	pF
Reverse Transfer Capacitance	Crss	f = 1.0 MHz		1.2	3.0	pF
Noise Voltage	NV	See Test Circuit		1.0	3.0	μV


NOISE VOLTAGE TEST CIRCUIT

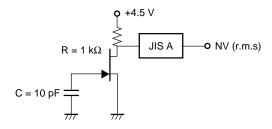



2


TYPICAL CHARACTERISTICS (TA = 25°C)

Phase-out/Discontinued

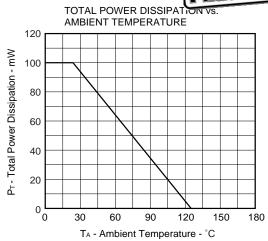


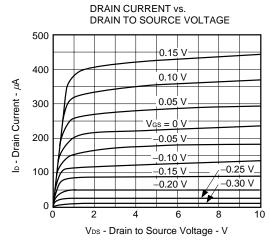


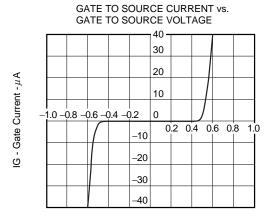

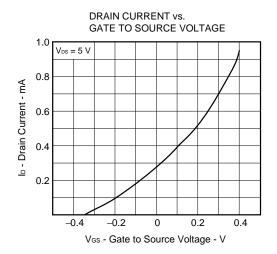


Vss - Gate to Source Voltage - V

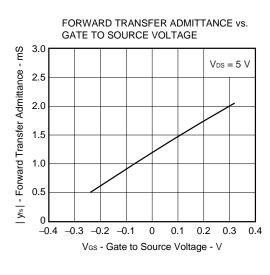

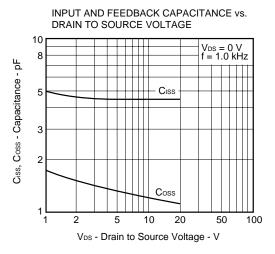


3


FORWARD TRANSFER ADMITTANCE AND GATE TO SOURCE CUT-OFF VOLTAGE vs. ZERO-GATE VOLTAGE DRAIN CURRENT CO-RELATION

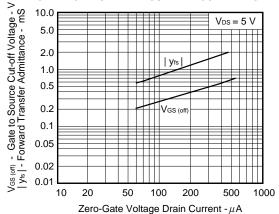



PACKAGE DRAWING (Unit: mm)

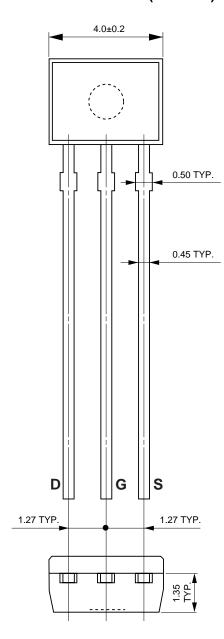

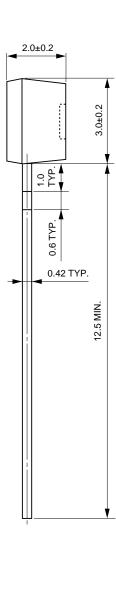

[MEMO]



[MEMO]

- The information in this document is current as of January, 2002. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of
 third parties by or arising from the use of NEC semiconductor products listed in this document or any other
 liability arising from the use of such products. No license, express, implied or otherwise, is granted under any
 patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative
 purposes in semiconductor product operation and application examples. The incorporation of these
 circuits, software and information in the design of customer's equipment shall be done under the full
 responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third
 parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers
 agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize
 risks of damage to property or injury (including death) to persons arising from defects in NEC
 semiconductor products, customers must incorporate sufficient safety measures in their design, such as
 redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products
 developed based on a customer-designated "quality assurance program" for a specific application. The
 recommended applications of a semiconductor product depend on its quality grade, as indicated below.
 Customers must check the quality grade of each semiconductor product before using it in a particular
 application.
 - "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
 - "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
 - "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).