

To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.
 - “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.
 - “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

BIPOLAR DIGITAL INTEGRATED CIRCUIT
 μ PB1508GV

**3 GHz INPUT DIVIDE BY 2 PRESCALER IC
 FOR DBS TUNERS**

μ PB1508GV is a 3.0 GHz input divide by 2 prescaler IC for DBS tuner applications. μ PB1508GV can make VHF/UHF band PLL frequency synthesizer apply to DBS/ECS tuners. μ PB1508GV is a shrink package version of μ PB584G so that this small package contributes to reduce the mounting space.

μ PB1508GV is manufactured using NEC's high fr NESAT™ IV silicon bipolar process. This process uses silicon nitride passivation film and gold electrodes. These materials can protect chip surface from external pollution and prevent corrosion/migration. Thus, this IC has excellent performance, uniformity and reliability.

FEATURES

- High toggle frequency : $f_{in} = 0.5 \text{ GHz to } 3.0 \text{ GHz}$
- High-density surface mounting : 8 pin plastic SSOP (175 mil)
- Low current consumption : 5 V, 12 mA
- Fixed division : $\div 2$

APPLICATION

- Prescaler between local oscillator and PLL frequency synthesizer included modulus prescaler
- DBS tuners with kit use of VHF/UHF band PLL frequency synthesizer


ORDERING INFORMATION

PART NUMBER	PACKAGE	MARKING	SUPPLYING FORM
μ PB1508GV-E1	8 pin plastic SSOP (175 mil)	1508	Embossed tape 8 mm wide. Pin 1 is in tape pull-out direction. 1 000 p/reel.

Remarks To order evaluation samples, please contact your local NEC sales office.
 (Part number for sample order: μ PB1508GV)

Caution: Electro-static sensitive devices

PIN CONNECTION (Top View)

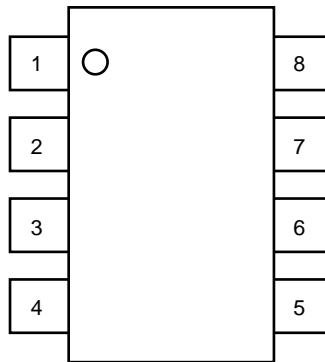


Pin No.	Pin name
1	V _{CC}
2	IN
3	$\overline{\text{IN}}$
4	GND
5	GND
6	NC
7	OUT
8	NC

PRODUCT LINE-UP

Product No.	I _{CC} (mA)	f _{in} (GHz)	V _{CC} (V)	Package	Pin Connection
μPB581A	30	0.5 to 2.8	4.5 to 5.5	8 pins CAN	—
μPB581C	30	0.5 to 2.2	4.5 to 5.5	8 pins DIP (300 mil)	NEC Original
μPB584G	18	0.5 to 2.5	4.5 to 5.5	8 pins SOP (225 mil)	NEC Original
μPB1508GV	12	0.5 to 3.0	4.5 to 5.5	8 pins SSOP (175 mil)	


Remarks This table shows the TYP values of main parameters. Please refer to ELECTRICAL CHARACTERISTICS.
 μPB581A, μPB581C and μPB584G are discontinued.

INTERNAL BLOCK DIAGRAM

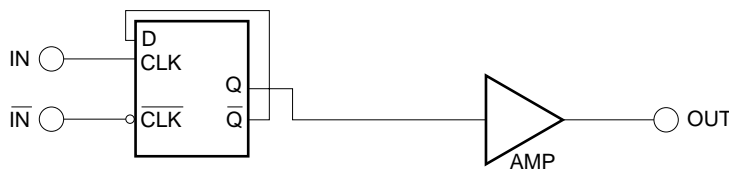

SYSTEM APPLICATION EXAMPLE

RF unit block of DBS tuners

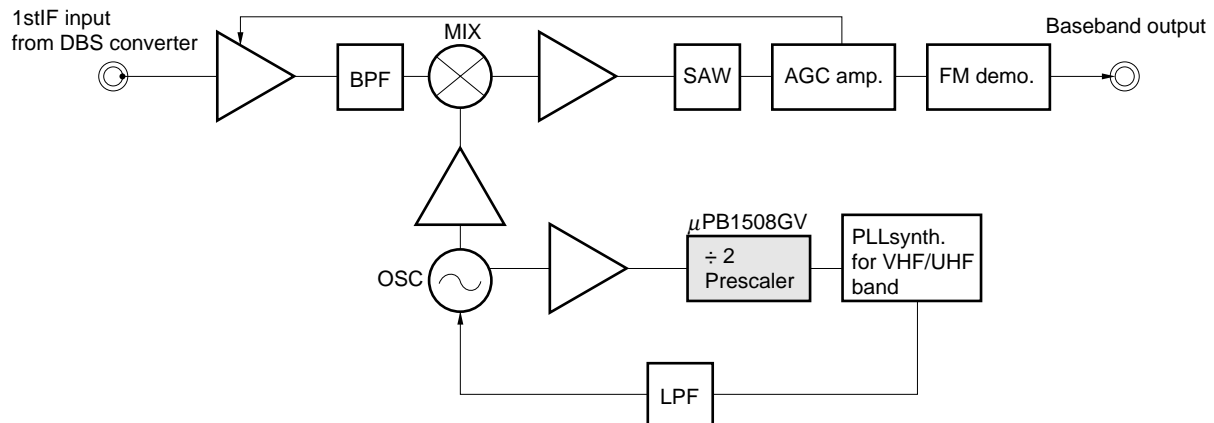

PIN EXPLANATION

Pin No.	Symbol	Applied voltage	PIN voltage	Functions and explanation
1	V _{CC}	4.5 to 5.5	—	Power supply pin. This pin must be equipped with bypass capacitor (eg 1 000 pF) to minimize ground impedance.
2	IN	—	1.7 to 4.95	Signal input pin. This pin should be coupled to signal source with capacitor (eg 1 000 pF) for DC cut.
3	$\overline{\text{IN}}$	—	1.7 to 4.95	Signal input bypass pin. This pin must be equipped with bypass capacitor (eg 1 000 pF) to minimize ground impedance.
4, 5	GND	0	—	Ground pin. Ground pattern on the board should be formed as wide as possible to minimize ground impedance.
6, 8	NC	—	—	Non connection pins. These pins should be opened.
7	OUT	—	1.0 to 4.7	Divided frequency output pin. This pin is designed as emitter follower output. This pin can be connected to input of prescaler within PLL synthesizer through DC cut capacitor.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	CONDITION	RATINGS	UNIT
Supply voltage	V _{CC}	T _A = +25 °C	6.0	V
Input voltage	V _{in}	T _A = +25 °C	6.0	V
Total power dissipation	P _D	Mounted on double sided copper clad 50 × 50 × 1.6 mm epoxy glass PWB (T _A = +85 °C)	250	mW
Operating ambient temperature	T _A		-40 to +85	°C
Storage temperature	T _{stg}		-55 to +150	°C






RECOMMENDED OPERATING CONDITIONS



PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARKS
Supply voltage	V _{CC}	4.5	5.0	5.5	V	
Operating ambient temperature	T _A	-40	+25	+85	°C	

ELECTRICAL CHARACTERISTICS (T_A = -40 to +85 °C, V_{CC} = 4.5 to 5.5 V, Z_S = Z_L = 50 Ω)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Circuit current	I _{CC}	No signals	7.6	12	14.5	mA
Upper limit operating frequency 1	f _{in(U)1}	P _{in} = -10 to +6 dBm	3.0	—	—	GHz
Upper limit operating frequency 2	f _{in(U)2}	P _{in} = -15 to +6 dBm	2.7	—	—	GHz
Lower limit operating frequency	f _{in(L)}	P _{in} = -15 to +6 dBm	—	—	0.5	GHz
Input power 1	P _{in1}	f _{in} = 2.7 to 3.0 GHz	-10	—	+6	dBm
Input power 2	P _{in2}	f _{in} = 0.5 to 2.7 GHz	-15	—	+6	dBm
Output power	P _{out}	P _{in} = 0 dBm, f _{in} = 2 GHz	-12	-7	—	dBm

TYPICAL CHARACTERISTICS (unless otherwise specified $T_A = +25^\circ\text{C}$)

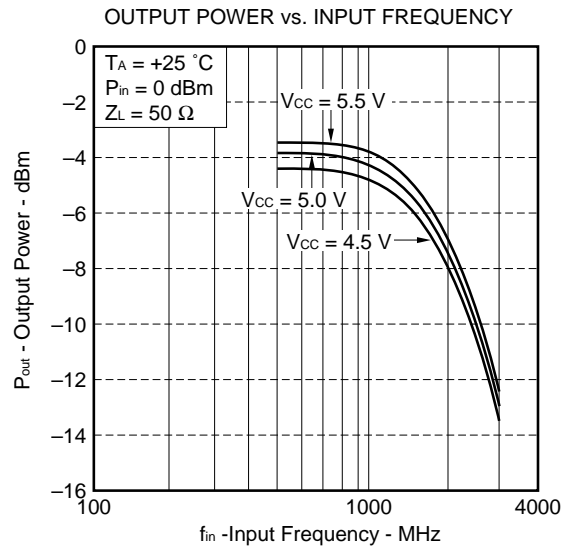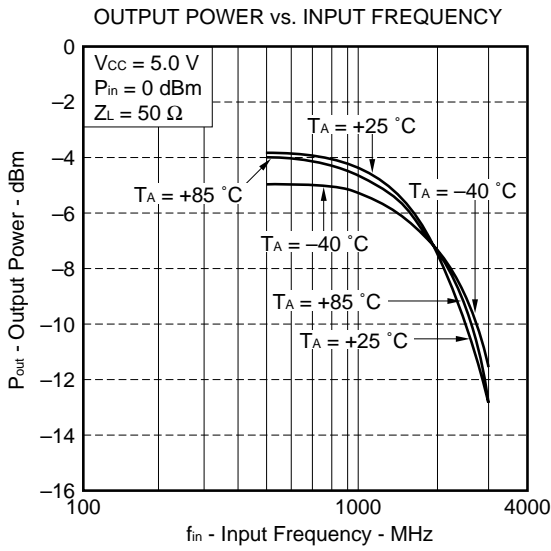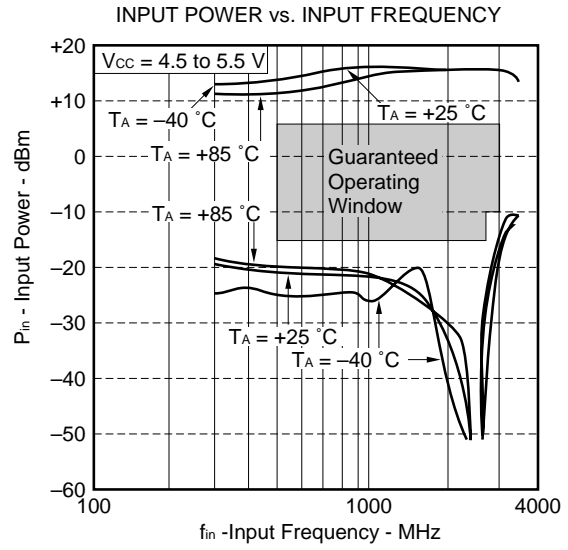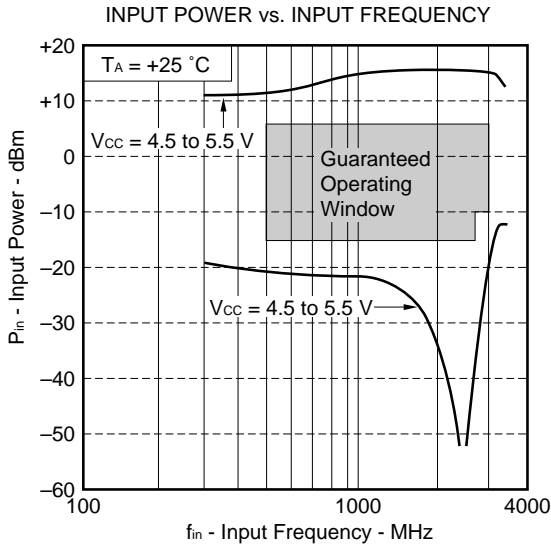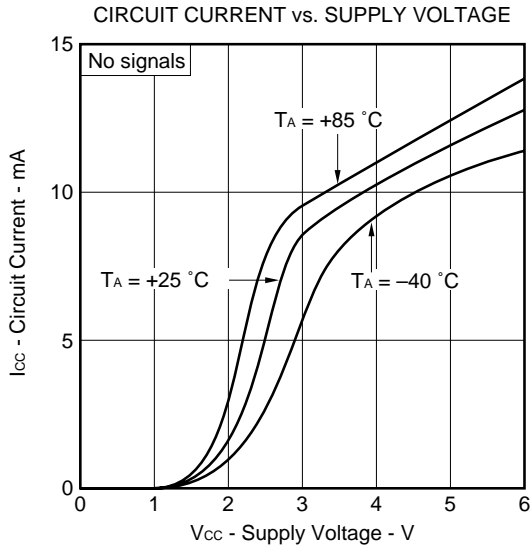


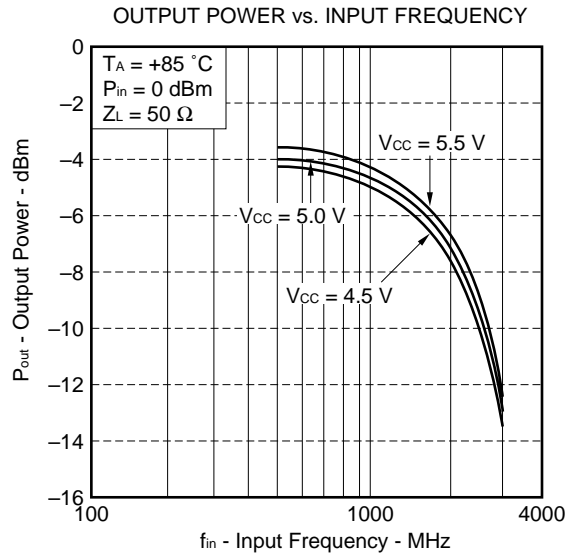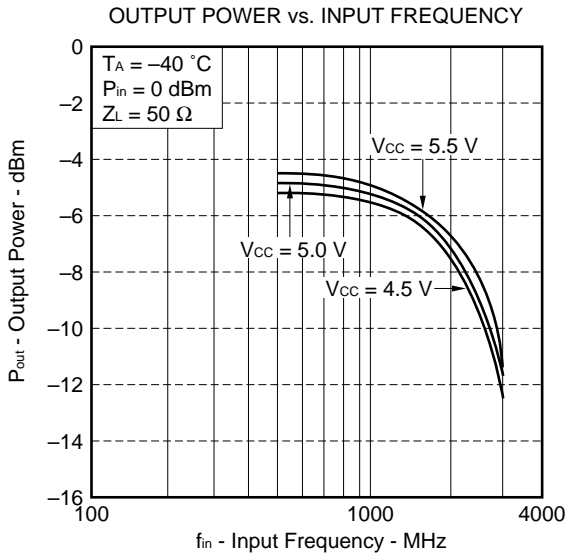

S11 vs. INPUT FREQUENCY

Vcc = 5.0 V

S11 Z
REF 1.0 Units
4 200.0 mUnits/
V 34.604 Ω -26.496 Ω
hp

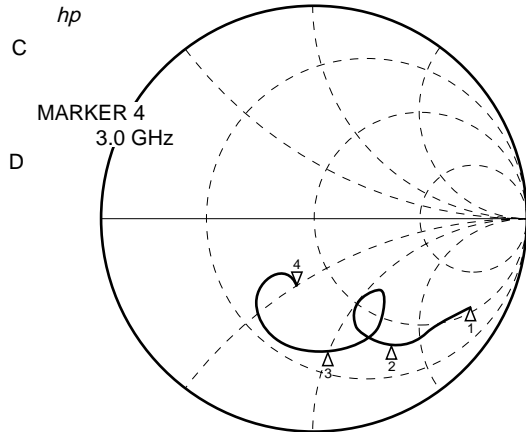


START 0.500000000 GHz
STOP 3.000000000 GHz

Δ₁: 500 MHz
Δ₂: 1000 MHz
Δ₃: 2000 MHz
Δ₄: 3000 MHz

FREQUENCY MHz	S ₁₁	
	MAG	ANG
500.0000	.850	-30.2
600.0000	.796	-37.8
700.0000	.790	-39.2
800.0000	.754	-45.2
900.0000	.766	-53.7
1000.0000	.701	-57.6
1100.0000	.660	-62.3
1200.0000	.606	-67.2
1300.0000	.571	-70.3
1400.0000	.521	-70.6
1500.0000	.495	-68.3
1600.0000	.441	-60.6
1700.0000	.479	-45.1
1800.0000	.602	-62.3
1900.0000	.595	-74.2
2000.0000	.608	-82.9
2100.0000	.603	-89.8
2200.0000	.599	-97.3
2300.0000	.588	-107.7
2400.0000	.532	-122.0
2500.0000	.396	-132.0
2600.0000	.325	-127.1
2700.0000	.270	-123.6
2800.0000	.232	-122.7
2900.0000	.258	-105.8
3000.0000	.351	-103.7

S₂₂ vs. OUTPUT FREQUENCY

V_{CC} = 5.0 V, f_{in} = 498 MHz

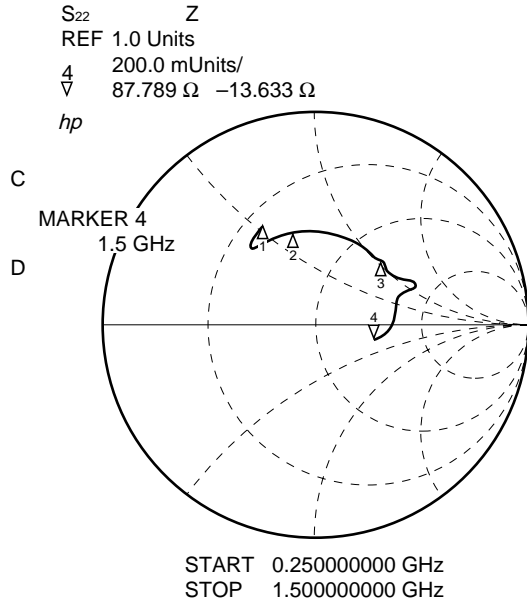


FREQUENCY MHz	S ₂₂ MAG	ANG
250.0000	.526	118.9
300.0000	.463	131.2
350.0000	.466	124.7
400.0000	.460	117.1
450.0000	.441	110.2
500.0000	.456	103.0
550.0000	.353	94.8
600.0000	.438	91.1
650.0000	.444	83.9
700.0000	.436	78.3
750.0000	.435	71.8
800.0000	.431	65.9
850.0000	.431	60.3
900.0000	.431	53.7
950.0000	.408	49.2
1000.0000	.445	44.9
1050.0000	.428	41.0
1100.0000	.429	33.7
1150.0000	.355	42.7
1200.0000	.418	20.0
1250.0000	.403	17.1
1300.0000	.392	9.6
1350.0000	.368	3.3
1400.0000	.343	-3.4
1450.0000	.319	-9.2
1500.0000	.289	-14.1

- △₁: 250 MHz
- △₂: 500 MHz
- △₃: 1000 MHz
- △₄: 1500 MHz

S₂₂ vs. OUTPUT FREQUENCY

V_{CC} = 5.0 V, f_{in} = 3002 MHz

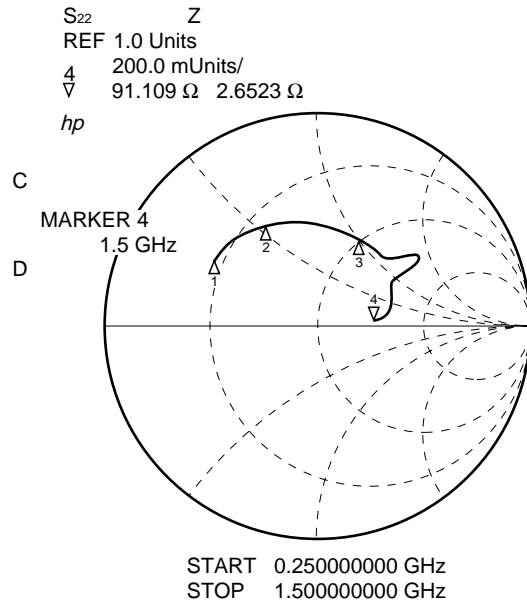

FREQUENCY MHz	S ₂₂ MAG	ANG
250.0000	.555	146.6
300.0000	.545	139.9
350.0000	.571	136.1
400.0000	.529	127.9
450.0000	.521	122.4
500.0000	.515	116.9
550.0000	.510	104.5
600.0000	.492	106.6
650.0000	.487	100.9
700.0000	.482	95.3
750.0000	.473	89.9
800.0000	.461	83.8
850.0000	.454	78.4
900.0000	.449	72.3
950.0000	.430	69.6
1000.0000	.443	64.3
1050.0000	.444	58.8
1100.0000	.440	52.3
1150.0000	.438	46.0
1200.0000	.501	37.5
1250.0000	.408	32.9
1300.0000	.388	25.1
1350.0000	.359	16.3
1400.0000	.335	9.7
1450.0000	.304	3.1
1500.0000	.285	4.6

- △₁: 250 MHz
- △₂: 500 MHz
- △₃: 1000 MHz
- △₄: 1500 MHz

TEST CIRCUIT


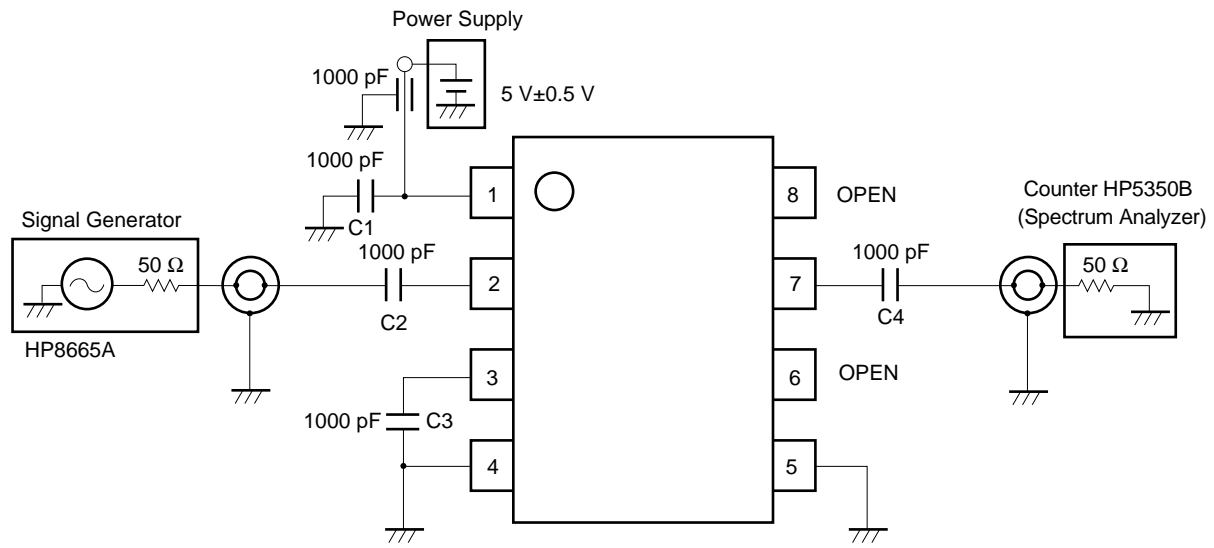


ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

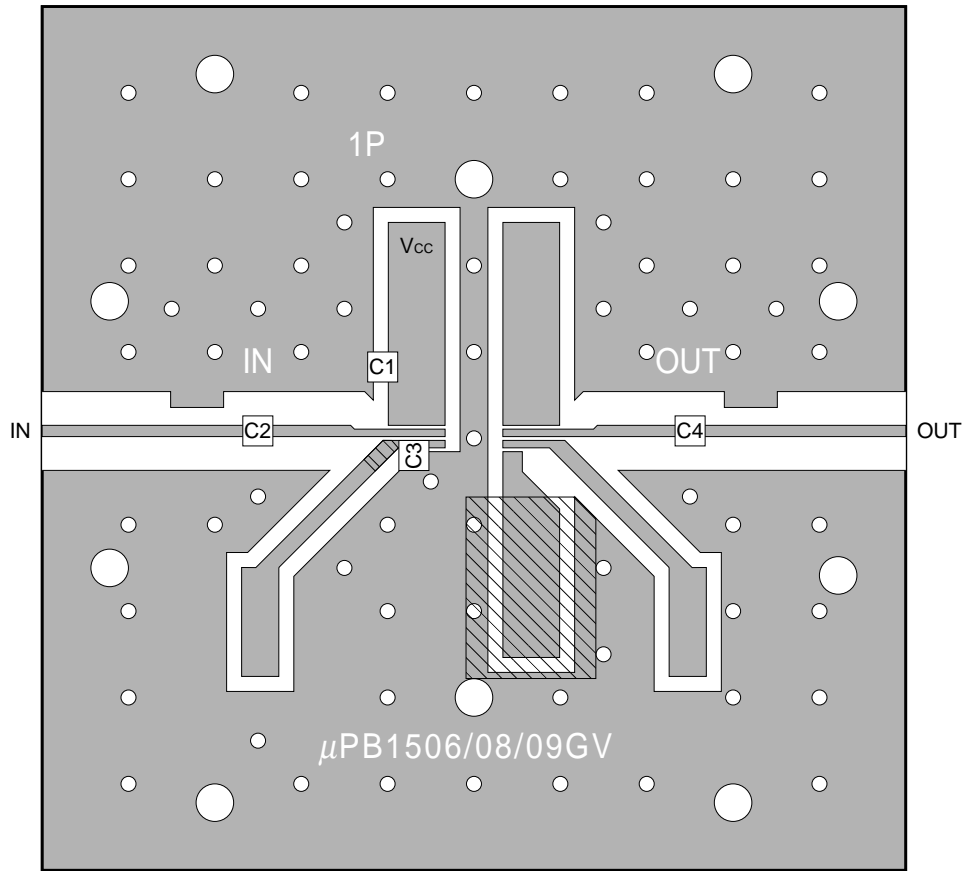

COMPONENT LIST

SYMBOL	VALUE
C1 to C4	1000 pF


EVALUATION BOARD CHARACTERS

- (1) 35 μm thick double-sided copper clad 50 × 50 × 0.4 mm polyimide board
- (2) Back side: GND pattern
- (3) Solder plated patterns
- (4) ○ : Through holes
- (5) of pin 3 : pattern should be removed.
- (6) of pin 5 : short chip must be attached to be grounded.

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.

PACKAGE DIMENSIONS

8 pin PLASTIC SSOP (175 mil) (unit : mm)

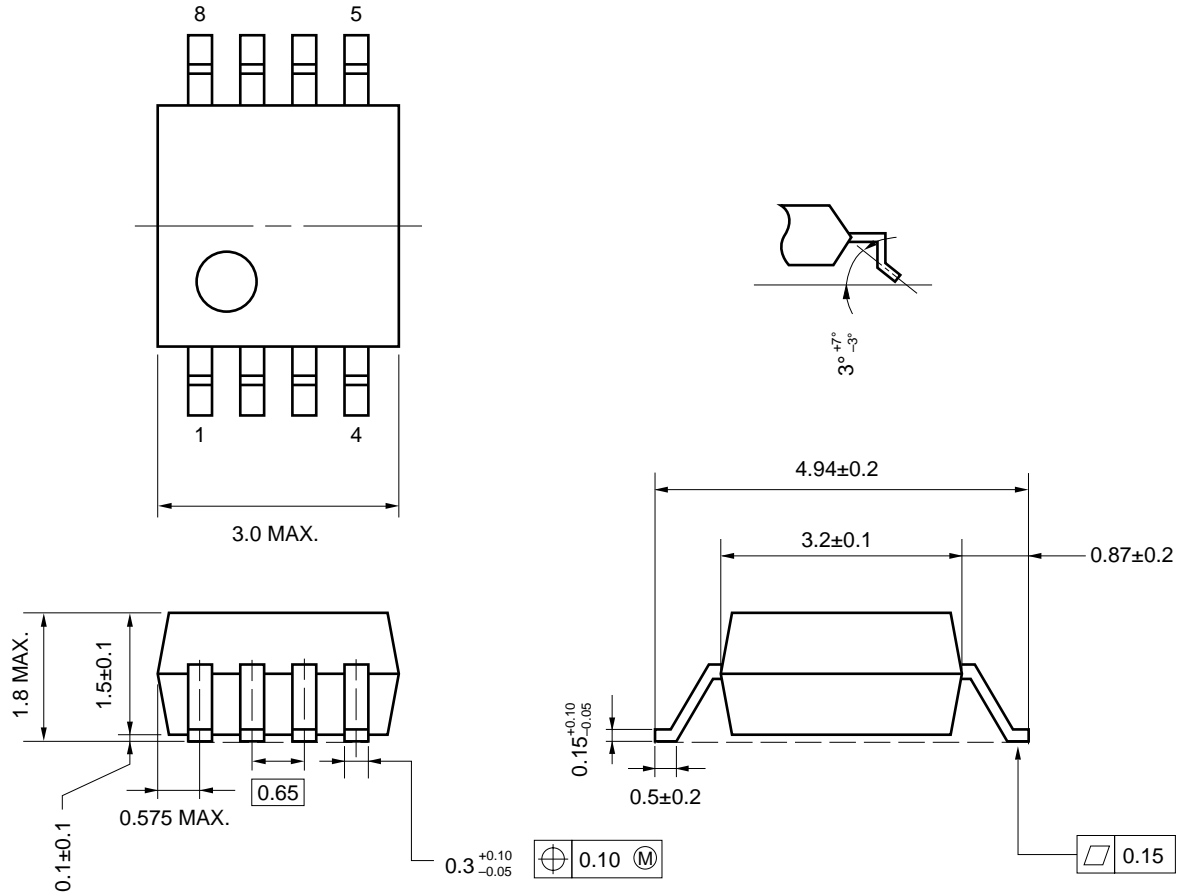

NOTE CORRECT USE

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as wide as possible to minimize ground impedance (to prevent undesired operation).
- (3) Keep the wiring length of the ground pins as short as possible.
- (4) Connect a bypass capacitor (e.g. 1 000 pF) to the Vcc pin.

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered in the following recommended conditions. Other soldering methods and conditions than the recommended conditions are to be consulted with our sales representatives.


μPB1508GV

Soldering method	Soldering conditions	Recommended condition symbol
Infrared ray reflow	Package peak temperature: 235 °C, Hour: within 30 s. (more than 210 °C), Time: 3 times, Limited days: no.*	IR35-00-3
VPS	Package peak temperature: 215 °C, Hour: within 40 s. (more than 200 °C), Time: 3 times, Limited days: no.*	VP15-00-3
Wave soldering	Soldering tub temperature: less than 260 °C, Hour: within 10 s., Time: 1 time, Limited days: no.	WS60-00-1
Pin part heating	Pin area temperature: less than 300 °C, Hour: within 3 s./pin, Limited days: no.*	

* It is the storage days after opening a dry pack, the storage conditions are 25 °C, less than 65 % RH.

Caution The combined use of soldering method is to be avoided (However, except the pin area heating method).

For details of recommended soldering conditions for surface mounting, refer to information document SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL (C10535E).



ATTENTION

OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.