

# DA6102


## 6-Channel System Power Management IC (PMIC) for 2S Battery Applications in a 10 mm<sup>2</sup> Package

**DA6102 is a highly integrated, compact PMIC for DSLR and mirror-less cameras, handheld POS terminals, and 2S battery applications. Excellent efficiency enables battery applications to extend battery life.**

DA6102 enables multi-channel applications to be powered with 3 % to 6 % improved efficiency, requiring less volume when compared to a multiple discrete solution. The wide input voltage range of DA6102 allows direct battery connection for each channel to maximize and extend battery life.


DA6102 features two buck regulators, one Buck-Boost regulator, one high-current buck controller, and two always-on LDOs. Extremely low RDSon FETs enable up to 94 % efficiency in buck and Buck-Boost regulation. This high level of integration combined with high frequency operation (up to 3 MHz) minimizes the PCB size (50 % smaller than traditional discrete solutions), enabling thinner profile end-applications, and the external component count for the smallest possible solution.

DA6102 is a highly configurable and flexible solution which enables very fast time to market. An I2C interface enables flexibility and easy configuration of the output voltage, switching frequency, power sequencing, and fault protection. Most features are also configurable by OTP for simple output voltage and start-up sequence setup. Each channel has a dedicated current limit, over- and under-voltage protection, with programmable masking and shutdown timer options. Dialog Semiconductor's **SmartCanvas™** GUI enables engineers to evaluate the DA6102 and be ready to market their end product quickly.

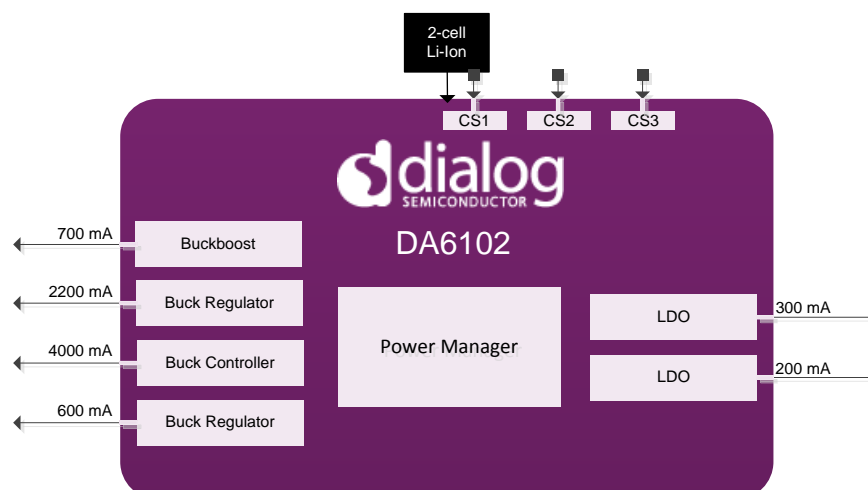

## Efficiency vs Load

$V_o = 4.25\text{ V}$

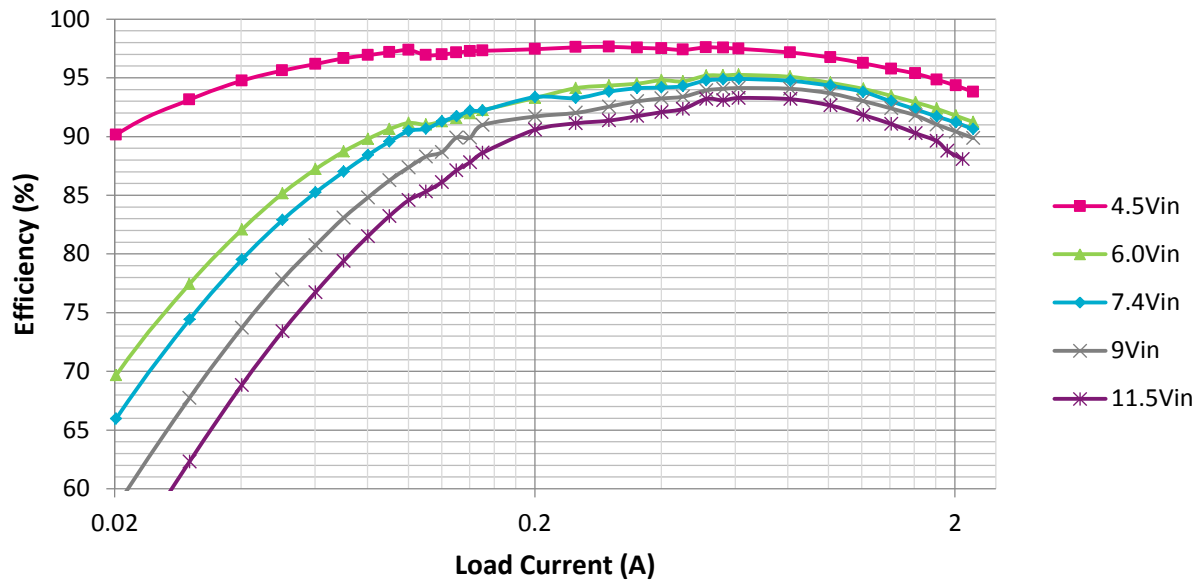

The PMIC also features a highly accurate input current sense with circuit breaker control for battery current sensing and over-current shutdown. Additional features include two external load switches, two LDO controllers, external clock synchronization, global enable pin, and a configurable PGOOD pin.

The DA6102 comes in an ultra-small 56-bump, 2.975 mm x 3.375 mm WLCSP package and operates over a  $-30\text{ }^{\circ}\text{C}$  to  $+85\text{ }^{\circ}\text{C}$  die temperature range.

## Applications

- ▶ DSLR cameras
- ▶ MILC cameras
- ▶ Handheld Point-of-Sale terminals
- ▶ 2-Cell battery application

## Benefits

- ▶ High efficiency
- ▶ Wide input voltage range
- ▶ Highly programmable start-up sequencing and protection features on each channel
- ▶ High accuracy  $\pm 1\%$  input current sense monitoring
- ▶ High frequency operation – low-profile components

## Key Features

- ▶ 4.5 V to 11.5 V input range
- ▶ Input current sense with circuit breaker
  - $\pm 1\%$  monitoring accuracy
- ▶ Programmable internal switching frequency
  - 1.0, 1.5, 2.0, 3.0 MHz
- ▶ External sync clock input
  - 1.5 MHz to 3 MHz range
- ▶ Programmable sequencing and soft-start
- ▶ Two always-on LDOs with integrated load switches
- ▶ Two integrated buck converters
- ▶ One integrated BuckBoost converter
- ▶ One high-current buck controller
- ▶ Two load switch controllers
- ▶ Two external LDO monitors
- ▶ Power Good flag
- ▶ Global enable input
- ▶ 2.975 mm x 3.375 mm WLCSP package
- ▶ CH1: BuckBoost regulator
  - 700 mA max
- ▶ CH2: Buck regulator
  - 5.1 V to 5.8 V output range
  - 2.2 A max
  - 3 V to 4.55 V output range
- ▶ CH3: Buck controller
  - Synchronous NFET drivers
  - 3.0 V to 3.75V output range
  - Supports up to 4 A
- ▶ CH4: Buck regulator
  - 600 mA max.
  - 3.2 V to 4.2 V output range
- ▶ LDO1: 300 mA, always-on
- ▶ LDO2: 200 mA, always-on
- ▶ Protection features on each channel
  - Current limit
  - Short circuit
  - Over-voltage
  - Output discharge

**Dialog Semiconductor Worldwide Sales Offices** - [www.dialog-semiconductor.com](http://www.dialog-semiconductor.com) email: [info@diasemi.com](mailto:info@diasemi.com)

**United Kingdom**  
Phone: +44 1793 757700

**The Netherlands**  
Phone: +31 73 640 88 22

**Japan**  
Phone: +81 3 5425 4567

**Singapore**  
Phone: +65 648 499 29

**Korea**  
Phone: +82 2 3469 8200

**Germany**  
Phone: +49 7021 805-0

**North America**  
Phone: +1 408 845 8500

**Taiwan**  
Phone: +886 281 786 222

**Hong Kong**  
Phone: +852 3769 5200

**China (Shenzhen)**  
Phone: +86 755 2981 3669

**China (Shanghai)**  
Phone: +86 21 5424 9058

This publication is issued to provide outline information only, which unless agreed by Dialog Semiconductor may not be used, applied, or reproduced for any purpose or be regarded as a representation relating to products. All use of Dialog Semiconductor products, software and applications referred to in this document are subject to Dialog Semiconductor's [Standard Terms and Conditions of Sale](#), available on the company website ([www.dialog-semiconductor.com](http://www.dialog-semiconductor.com)) unless otherwise stated.

Dialog and the Dialog logo are trademarks of Dialog Semiconductor plc or its subsidiaries. All other product or service names are the property of their respective owners.

© Copyright 2017 Dialog Semiconductor. All rights reserved.