

ISL72991RH

Neutron Test Report

TR063  
Rev. 0.00  
Mar 21, 2018

## Introduction

This report summarizes results of 1MeV equivalent neutron testing of the [ISL72991RH](#) low dropout adjustable negative regulator. The test was conducted in order to determine the sensitivity of the part to Displacement Damage (DD) caused by neutron or proton environments. Neutron fluences ranged from  $1 \times 10^{11} \text{n/cm}^2$  to  $1 \times 10^{14} \text{n/cm}^2$ . This project was carried out in collaboration with the Advanced Technology Laboratories Division of Northrop Grumman Corporation and their support is gratefully acknowledged.

## Part Description

The radiation hardened ISL72991RH is a low dropout adjustable negative regulator with an output voltage range of -2.25V to -26V. The device features a 1A output current capability, an adjustable current limit pin (ILIM), and a shutdown pin (SD) for easy on/off control.

The ISL72991RH incorporates unique circuitry that enables precision performance across the  $-55^\circ\text{C}$  to  $+125^\circ\text{C}$  temperature range and post-irradiation. Specifications across the full temperature range include an internal reference voltage of  $-1.25\text{V} +40\text{mV}/-50\text{mV}$  (maximum), line regulation of  $\pm 25\text{mV}$  (maximum), and load regulation of  $\pm 15\text{mV}$  (maximum). The reference voltage is the ADJ to GND voltage.

Constructed with the Renesas dielectrically isolated Rad Hard Silicon Gate (RSG) BiCMOS process, these devices are immune to single event latch-up and have been specifically designed to provide highly reliable performance in harsh radiation environments.

Specifications for Rad Hard QML devices are controlled by the Defense Logistics Agency (DLA) in Columbus, OH. The SMD is the controlling document and must be cited when ordering.

## Related Literature

For a full list of related documents, visit our website

- [ISL72991RH](#) product page
- MIL-STD-883 test method 1017

## 1. Test Description

### 1.1 Irradiation Facility

Neutron fluence irradiations were performed on the test samples on June 25, 2015, at the WSMR Fast Burst Reactor (FBR) per MIL-STD-883G, Method 1017.2, with each part unpowered during irradiation and all leads shorted. The target irradiation levels were  $1 \times 10^{11} \text{n/cm}^2$ ,  $5 \times 10^{11} \text{n/cm}^2$ ,  $1 \times 10^{12} \text{n/cm}^2$ ,  $1 \times 10^{12} \text{n/cm}^2$ , and  $1 \times 10^{14} \text{n/cm}^2$ . As neutron irradiation activates many of the heavier elements found in a packaged integrated circuit, the parts exposed at the higher neutron levels required (as expected) some 'cooldown' time before being shipped back to the Renesas Palm Bay facility for electrical testing.

### 1.2 Test Fixturing

No formal irradiation test fixturing is involved, as these DD tests are 'bag tests' in the sense that the parts are irradiated with all leads shorted together.

### 1.3 Radiation Dosimetry

Table 1 shows the TLD and Sulfur pellet dosimetry from WSMR indicating the total accumulated gamma dose and actual neutron fluence exposure levels for each sets of samples. This dosimetry process is traceable to NIST (IAW ASTM E722).

Table 1. ISL72991RH Neutron Fluence Dosimetry Data

TLD		Sulfur Pellet						
TLD Number	cGy(Si)	Pellet Number	Distance (inches)	Exposure ID	Flu >3MeV (n/cm <sup>2</sup> )	% Unc	Total Fluence (n/cm <sup>2</sup> )	1Mev Si (n/cm <sup>2</sup> )
81	2.760E+01	3263	49	Free Field	1.536E+10	7.1	1.335E+11	1.087E+11
82	1.315E+02	3264	21.65	Free Field	8.779E+10	7.1	7.016E+11	6.105E+11
83	5.403E+02	3265	11	Free Field	3.334E+11	7.1	2.620E+12	2.337E+12
85	2.954E+03	3267	31.15	Free Field	1.528E+12	7.1	1.253E+13	1.066E+13
84	2.997E+04	3266	10	Free Field	1.990E+13	7.1	1.562E+14	1.395E+14

Notes:

- 1cGy(Si) = 1rad(Si)
- The Uncertainty (% Unc) column is applicable only to the Fluence > 3MeV.

### 1.4 Characterization Equipment and Procedures

Electrical testing was performed before and after irradiation using the production Automated Test Equipment (ATE). All electrical testing was performed at room temperature.

### 1.5 Experimental Matrix

Testing proceeded in general accordance with the guidelines of MIL-STD-883 test method 1017. The experimental matrix consisted of ten samples irradiated at  $1 \times 10^{11}$  n/cm<sup>2</sup>, five samples irradiated at  $5 \times 10^{11}$  n/cm<sup>2</sup>, five irradiated at  $1 \times 10^{12}$  n/cm<sup>2</sup>, five irradiated at  $1 \times 10^{13}$  n/cm<sup>2</sup>, and five irradiated at  $1 \times 10^{14}$  n/cm<sup>2</sup>. Six control units were used.

ISL72991RH samples were drawn from Lot DD4T4CB. Samples were packaged in the standard hermetic 28 Ld Ceramic Flatpack (CFP) production package, code K28.A. Samples were processed through burnin before irradiation and were screened to the SMD limits at room, low, and high temperatures before the start of neutron testing.

## 2. Results

Neutron testing of the ISL72991RH is complete and the results are reported in the balance of this report. It should be understood when interpreting the data that each neutron irradiation was performed on a different set of samples; this is *not* total dose testing, where the damage is cumulative.

### 2.1 Attributes Data

Table 2. Attributes Data

Fluence (n/cm <sup>2</sup> )		Sample Size	Pass (Note 1)	Fail
Planned	Actual			
1x10 <sup>11</sup>	1.1x10 <sup>11</sup>	10	10	0
5x10 <sup>11</sup>	6.1x10 <sup>11</sup>	5	5	0
1x10 <sup>12</sup>	2.3x10 <sup>12</sup>	5	5	0
1x10 <sup>13</sup>	1.1x10 <sup>13</sup>	5	5	0
1x10 <sup>14</sup>	1.4x10 <sup>14</sup>	5	0	5

Note:

1. A 'Pass' indicates a sample that passes all SMD limits.

### 2.2 Variables Data

[Figures 1](#) through [11](#) show data plots for key parameters before and after irradiation to each level. The plots show the mean of each parameter as a function of neutron irradiation. Also, they include error bars at each datapoint, representing the minimum and maximum measured values of the samples, although in some plots the error bars might not be visible due to their values compared to the scale of the graph. While the applicable electrical limits taken from the SMD are also shown, it should be noted that these limits are provided for guidance only as the ISL72991RH is not specified for the neutron environment.

All samples passed the post-irradiation SMD limits after all exposures up to and including 1x10<sup>13</sup>n/cm<sup>2</sup>, but failed the SMD post-irradiation limits after 1x10<sup>14</sup>n/cm<sup>2</sup>.

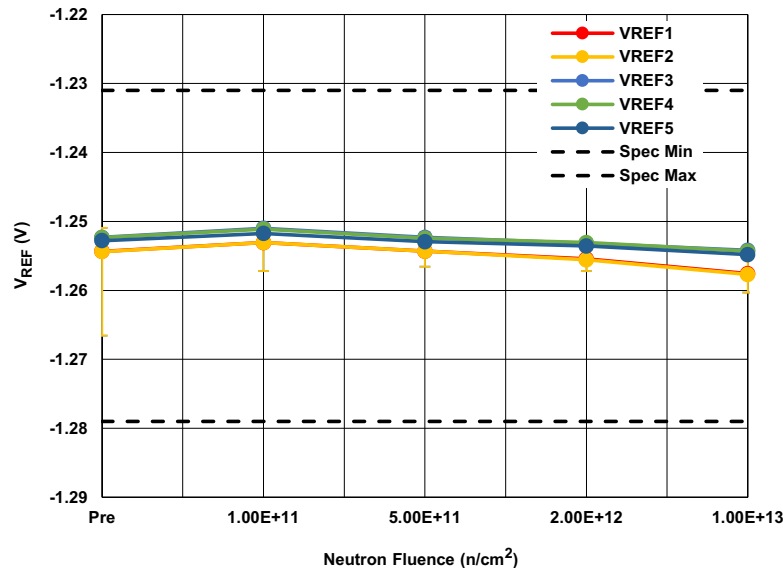


Figure 1. ISL72991RH reference voltage (V<sub>REF</sub>) at five different conditions following irradiation to each level. Parts were non-functional after 1E14n/cm<sup>2</sup> and the results are not plotted. V<sub>REF1</sub> denotes V<sub>IN</sub> = 30V, no load, V<sub>REF2</sub> denotes V<sub>IN</sub> = 30V, 1A, V<sub>REF3</sub> denotes V<sub>IN</sub> = 3.5V, no load, V<sub>REF4</sub> denotes V<sub>IN</sub> = 3.5V, 1A, and V<sub>REF5</sub> denotes V<sub>IN</sub> = 7V, 1A. The error bars represent the minimum and maximum measured values. The SMD limits are -1.279V minimum and -1.231V maximum.

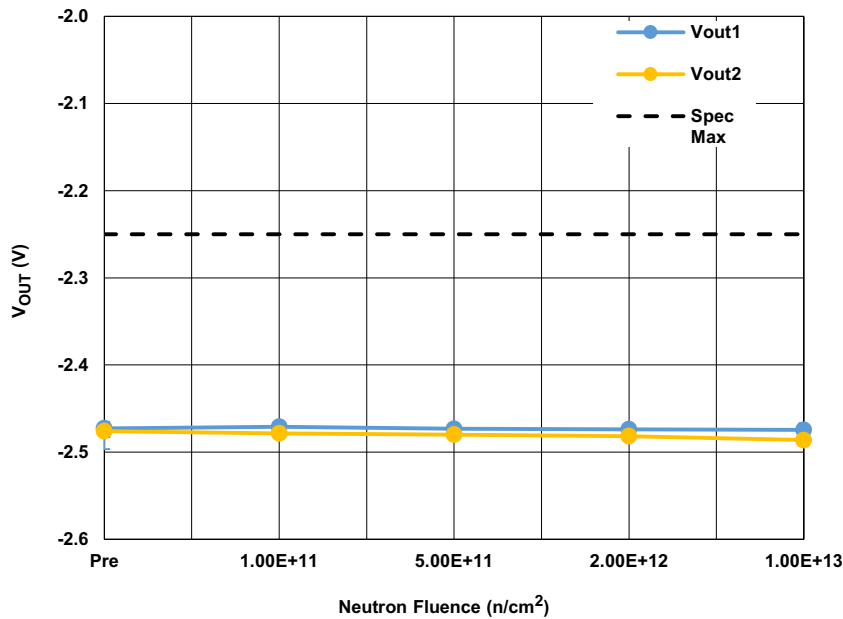


Figure 2. ISL72991RH minimum output voltage (V<sub>OUT</sub>) with V<sub>IN</sub> = 3V at two different conditions following irradiation to each level. Parts were non-functional after 1E14n/cm<sup>2</sup> and the results are not plotted. V<sub>OUT1</sub> denotes a 10mA load, and V<sub>OUT2</sub> denotes no load. The error bars represent the minimum and maximum measured values. The SMD limit is -2.25V maximum.

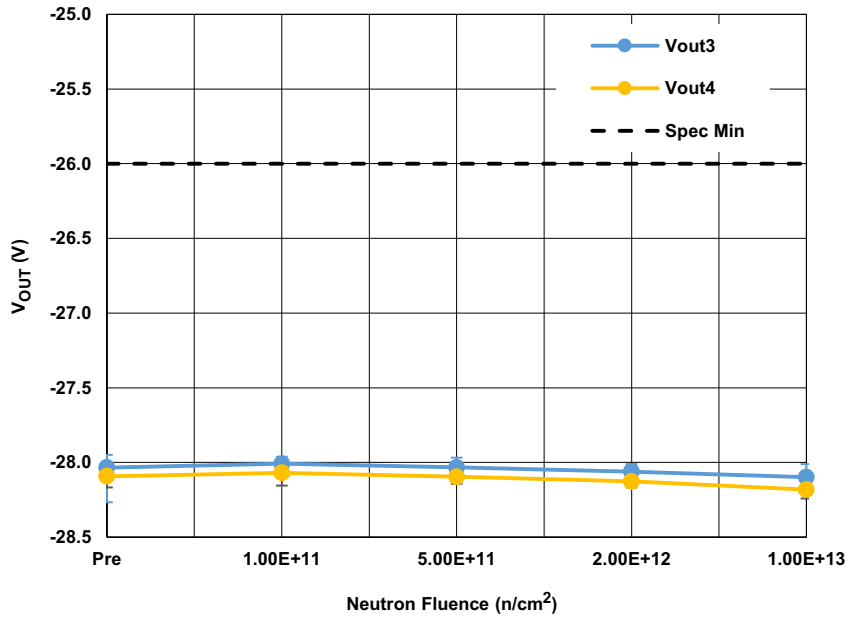


Figure 3. ISL72991RH maximum output voltage ( $V_{OUT}$ ) with  $V_{IN} = 30V$  at two different conditions following irradiation to each level. Parts were non-functional after  $1E14n/cm^2$  and the results are not plotted.  $V_{OUT3}$  denotes a 10mA load, and  $V_{OUT4}$  denotes no load. The error bars represent the minimum and maximum measured values. The SMD limit is -26.0V maximum.

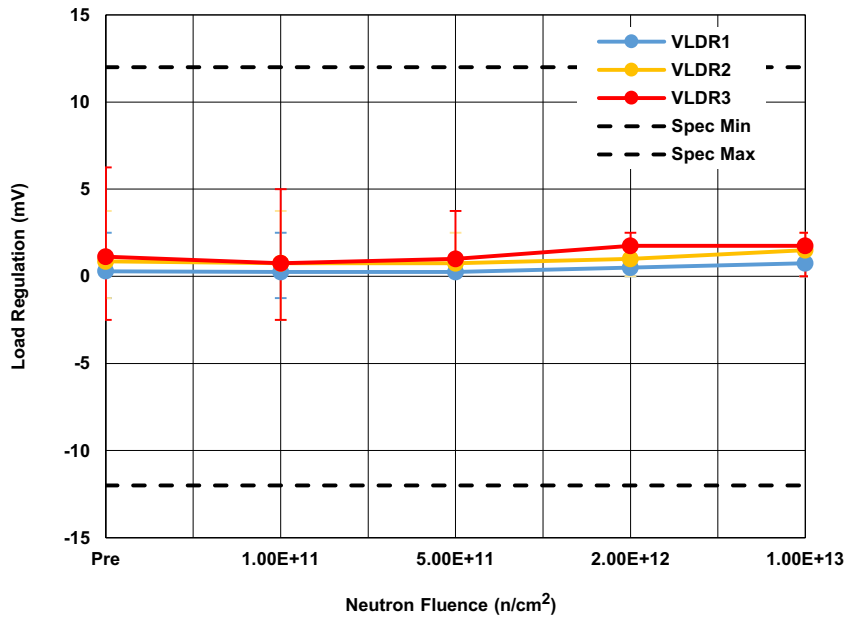


Figure 4. ISL72991RH load regulation ( $V_{LDR}$ ) with  $V_{IN} = -7V$ ,  $V_O = -5V$ , at three different conditions following irradiation to each level. Parts were non-functional after  $1E14n/cm^2$  and the results are not plotted.  $V_{LDR1}$  denotes a 100mA load,  $V_{LDR2}$  denotes a 700mA load, and  $V_{LDR3}$  denotes a 1A load. The error bars represent the minimum and maximum measured values. The SMD limits are -12.0V minimum and 12.0V maximum.

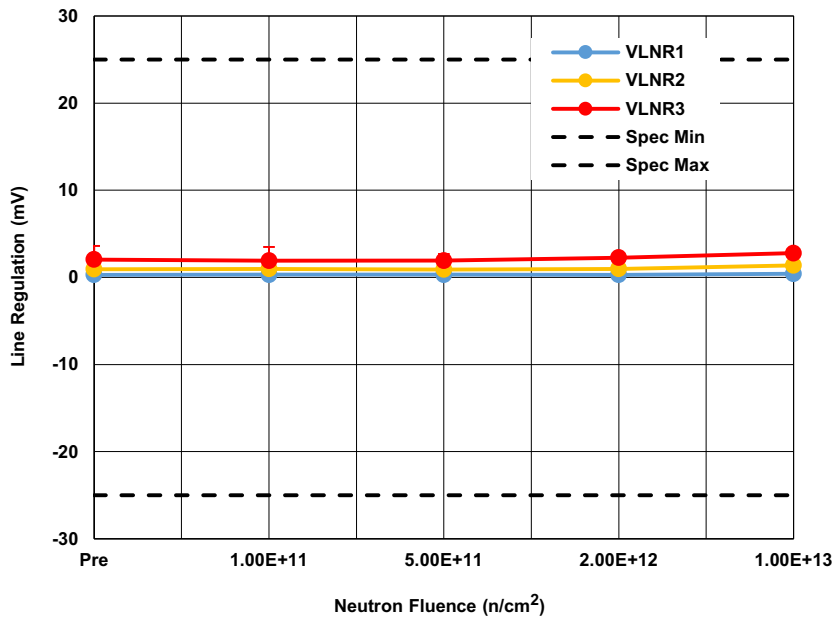


Figure 5. ISL72991RH line regulation ( $V_{LNR}$ ) with  $I_O = 100\text{mA}$  at three different conditions following irradiation to each level. Parts were non-functional after  $1\text{E}14\text{n/cm}^2$  and the results are not plotted.  $V_{LNR1}$  denotes  $V_{OUT}$  at  $4\text{V} - V_{OUT}$  at  $7\text{V}$ ,  $V_{LNR2}$  denotes  $V_{OUT}$  at  $4\text{V} - V_{OUT}$  at  $15\text{V}$ , and  $V_{LNR3}$  denotes  $V_{OUT}$  at  $4\text{V} - V_{OUT}$  at  $30\text{V}$ . The error bars represent the minimum and maximum measured values. The SMD limits are  $-25.0\text{mV}$  minimum and  $25.0\text{mV}$  maximum.

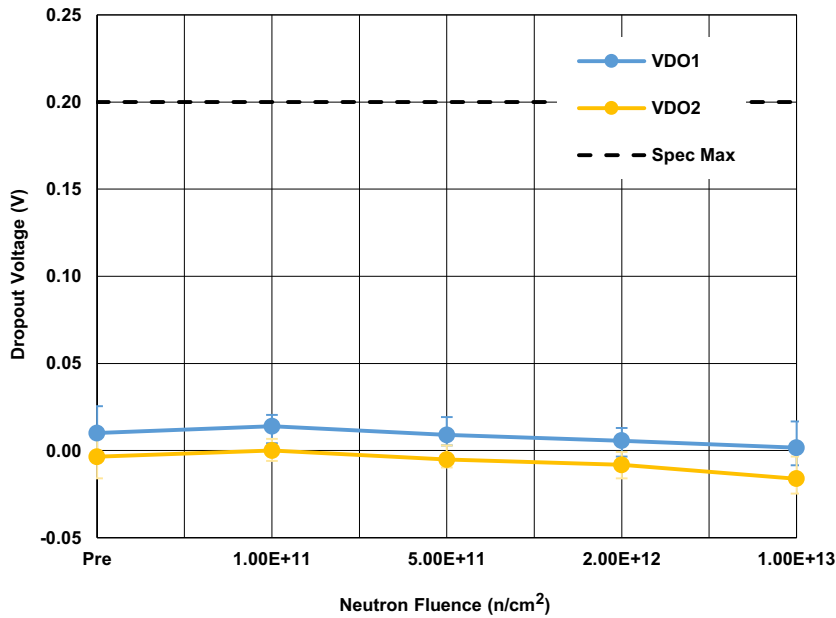


Figure 6. ISL72991RH dropout voltage ( $V_{DO}$ ) at two different conditions following irradiation to each level. Parts were non-functional after  $1\text{E}14\text{n/cm}^2$  and the results are not plotted.  $V_{DO1}$  denotes  $I_O = 100\text{mA}$ , and  $V_{DO2}$  denotes  $I_O = 1\text{A}$ . The error bars represent the minimum and maximum measured values. The SMD limit is  $0.2\text{V}$  maximum for  $V_{DO1}$  and  $1.0\text{V}$  maximum for  $V_{DO2}$  (not shown).

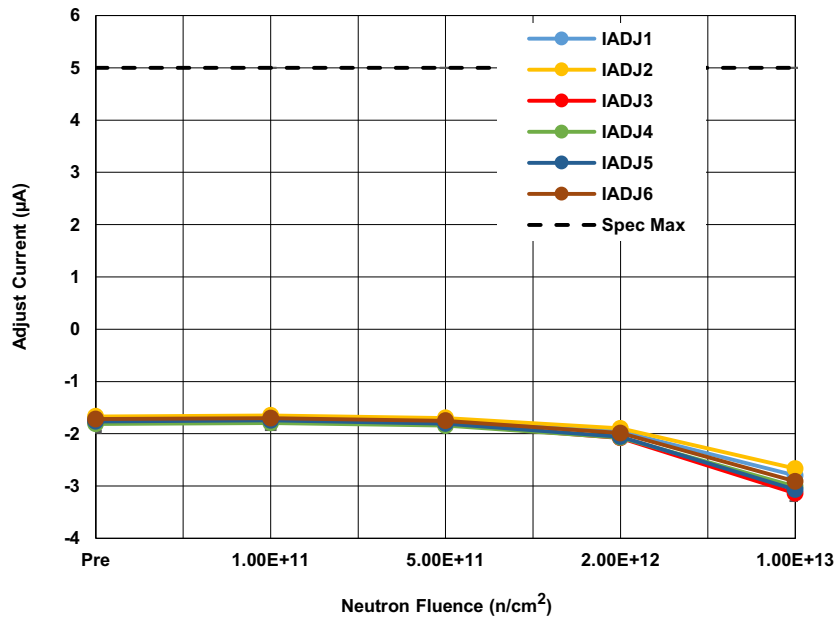


Figure 7. ISL72991RH adjust current ( $I_{ADJ}$ ) at six different conditions following irradiation to each level. Parts were non-functional after  $1E14n/cm^2$  and the results are not plotted.  $I_{ADJ1}$  denotes  $V_{IN} = 30V$ , no load,  $I_{ADJ2}$  denotes  $V_{IN} = 30V$ , 500mA,  $I_{ADJ3}$  denotes  $V_{IN} = 4V$ , no load,  $I_{ADJ4}$  denotes  $V_{IN} = 4V$ , 500mA,  $I_{ADJ5}$  denotes  $V_{IN} = 7V$ , no load, and  $I_{ADJ6}$  denotes  $V_{IN} = 7V$ , 500mA. The error bars represent the minimum and maximum measured values. The SMD limit is 5 $\mu$ A maximum.

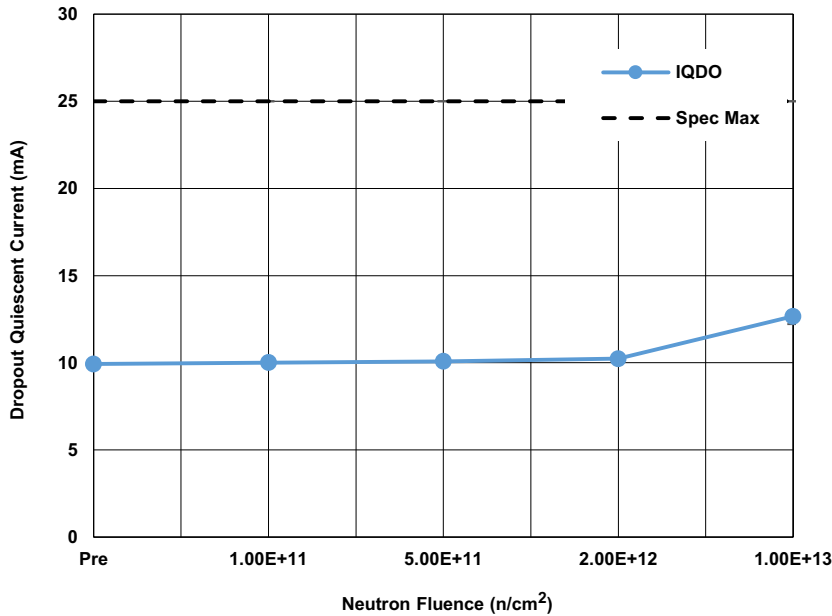


Figure 8. ISL72991RH dropout quiescent current ( $I_{QDO}$ ) at  $I_O = 500mA$  following irradiation to each level. Parts were non-functional after  $1E14n/cm^2$  and the results are not plotted. The error bars represent the minimum and maximum measured values. The SMD limit is 25mA maximum.

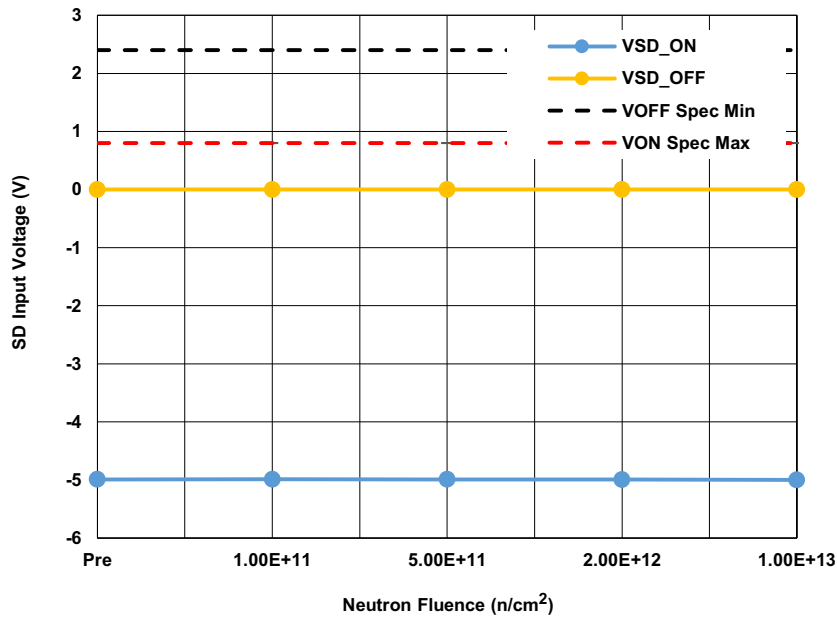


Figure 9. ISL72991RH shutdown input voltage ( $V_{SD}$ ) at two different conditions following irradiation to each level. Parts were non-functional after  $1E14n/cm^2$  and the results are not plotted.  $V_{SD\_ON}$  denotes  $V_O = ON$ , and  $V_{SD\_OFF}$  denotes  $V_O = OFF$ . The error bars represent the minimum and maximum measured values. The SMD limits are 0.8V maximum for  $V_{SD\_ON}$  and 2.4V minimum for  $V_{SD\_OFF}$ .

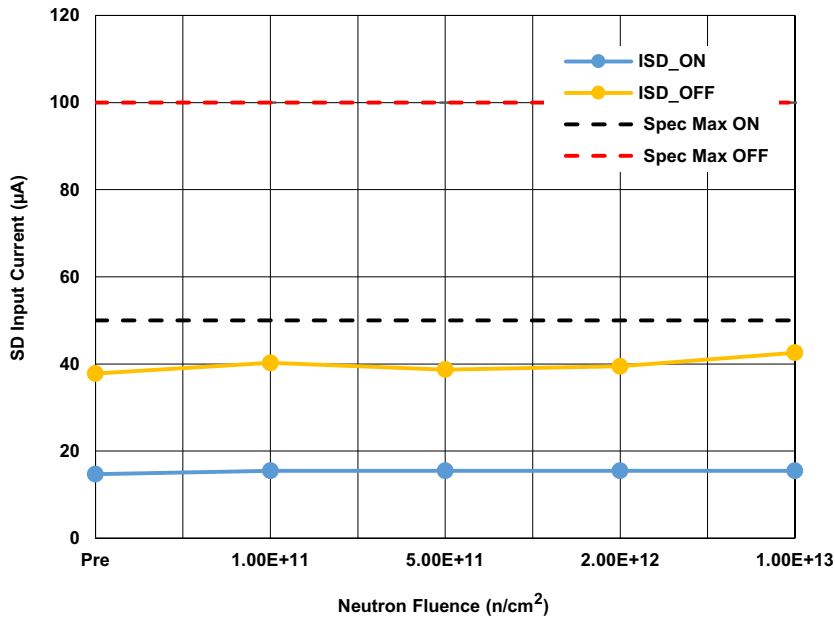


Figure 10. ISL72991RH shutdown input current ( $I_{SD}$ ) at two different conditions following irradiation to each level. Parts were non-functional after  $1E14n/cm^2$  and the results are not plotted.  $I_{SD\_ON}$  denotes  $V_{SD} = 0.8V$ , and  $I_{SD\_OFF}$  denotes  $V_{SD} = 2.4V$ . The error bars represent the minimum and maximum measured values. The SMD limits are 50µA maximum for  $I_{SD\_ON}$  and 100µA maximum for  $I_{SD\_OFF}$ .



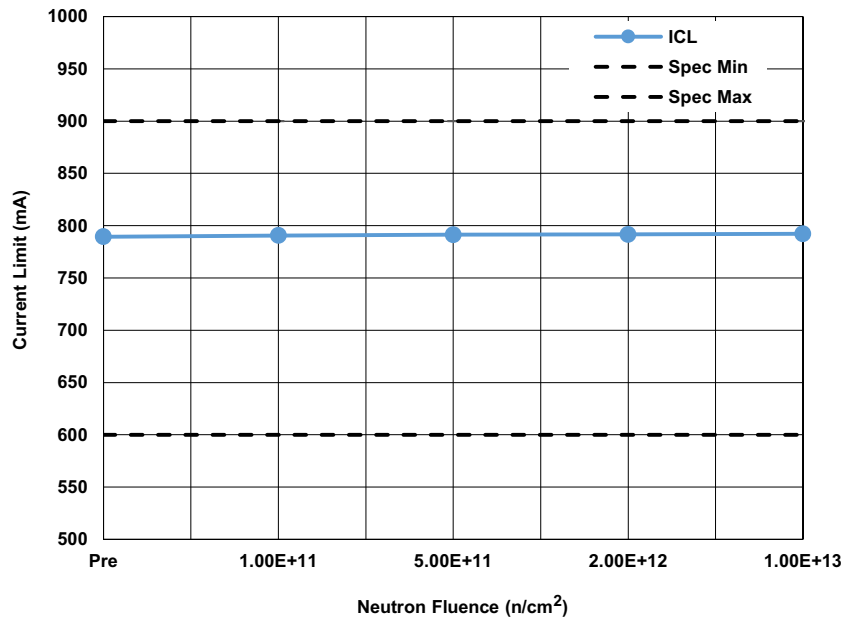


Figure 11. ISL72991RH current limit ( $I_{CL}$ ), with  $R_{CL} = 3.7k\Omega$  following irradiation to each level. Parts were non-functional after  $1E14n/cm^2$  and the results are not plotted. The error bars represent the minimum and maximum measured values. The SMD limits are 600mA minimum and 900mA maximum.

### 3. Discussion and conclusion

This document reports the results of 1MeV equivalent neutron testing of the ISL72991RH radiation hardened low dropout adjustable negative voltage regulator. Parts were tested at  $1 \times 10^{11}n/cm^2$ ,  $5 \times 10^{11}n/cm^2$ ,  $1 \times 10^{12}n/cm^2$ ,  $1 \times 10^{13}n/cm^2$ , and  $1 \times 10^{14}n/cm^2$ . All samples passed the SMD limits after all exposures up to and including  $1 \times 10^{13}n/cm^2$ , but failed after  $1 \times 10^{14}n/cm^2$ . The results of key parameters before and after irradiation to each level are plotted in [Figures 1](#) through [11](#). The plots show the mean of each parameter as a function of neutron irradiation, with error bars that represent the minimum and maximum measured values. The figures also show the applicable electrical limits taken from the SMD, but it should be noted that these limits are provided for guidance only as the ISL72991RH is not specified for the neutron environment.

## 4. Appendix

### 4.1 Reported Parameters

Figure	Parameter	Limit, Low	Limit, High	Units	Notes
<a href="#">1</a>	Reference Voltage	-1.279	-1.231	V	$3\text{mA} \leq I_O \leq 1\text{A}$ , $V_O - 1.0\text{V} \geq V_{IN} \geq -30\text{V}$
<a href="#">2</a>	Output Voltage Range		-2.25	V	$V_{IN} = -3.0\text{V}$ , $I_O \leq 100\text{mA}$
<a href="#">3</a>		-26.0			$V_{IN} = -30\text{V}$ , $I_O \leq 100\text{mA}$
<a href="#">4</a>	Load Regulation	-12	12	mV	$3\text{mA} \leq I_O \leq 1\text{A}$ , $V_{IN} = -30\text{V}$ , $V_O = -5\text{V}$
<a href="#">5</a>	Line Regulation	-25	25	mV	$I_O = 100\text{mA}$ , $V_O - 1.0\text{V} \geq V_{IN} \geq -30\text{V}$
<a href="#">6</a>	Dropout Voltage		0.2	V	$I_O = 100\text{mA}$ , $\Delta V \leq 50\text{mV}$
			1.0		$I_O = 1\text{A}$ , $\Delta V \leq 50\text{mV}$
<a href="#">7</a>	Adjust Current		5	$\mu\text{A}$	$I_O \leq 500\text{mA}$ , $V_O - 1.0\text{V} \geq V_{IN} \geq -30\text{V}$
<a href="#">8</a>	Dropout Quiescent Current		25	mA	$I_O \leq 500\text{mA}$ , $V_O - V_{IN} = 0.2\text{V}$
<a href="#">9</a>	SD Input Voltage		0.8	V	$V_O$ : ON
		2.4		V	$V_O$ : OFF
<a href="#">10</a>	SD Input Current		50	$\mu\text{A}$	$V_{SD} = 0.8\text{V}$
			100		$V_{SD} = 2.4\text{V}$
<a href="#">11</a>	Current Limit	600	900	mA	$R_{CL} = 3.7\text{k}\Omega$

## 5. Revision History

Date	Rev.	Description
Mar 21, 2018	0.00	Initial release

## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.  
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.  
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.  
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.  
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.  
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



### SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

#### **Renesas Electronics America Inc.**

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.  
Tel: +1-408-432-8888, Fax: +1-408-434-5351

#### **Renesas Electronics Canada Limited**

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3  
Tel: +1-905-237-2004

#### **Renesas Electronics Europe Limited**

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K  
Tel: +44-1628-651-700, Fax: +44-1628-651-804

#### **Renesas Electronics Europe GmbH**

Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

#### **Renesas Electronics (China) Co., Ltd.**

Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

#### **Renesas Electronics (Shanghai) Co., Ltd.**

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China  
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

#### **Renesas Electronics Hong Kong Limited**

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2265-6688, Fax: +852 2886-9022

#### **Renesas Electronics Taiwan Co., Ltd.**

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan  
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

#### **Renesas Electronics Singapore Pte. Ltd.**

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949  
Tel: +65-6213-0200, Fax: +65-6213-0300

#### **Renesas Electronics Malaysia Sdn.Bhd.**

Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

#### **Renesas Electronics India Pvt. Ltd.**

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India  
Tel: +91-80-67208700, Fax: +91-80-67208777

#### **Renesas Electronics Korea Co., Ltd.**

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5338