


TRANSCEIVERS

RS-485/422, RS-232, and Multi-Protocol




Interface

INTERFACE

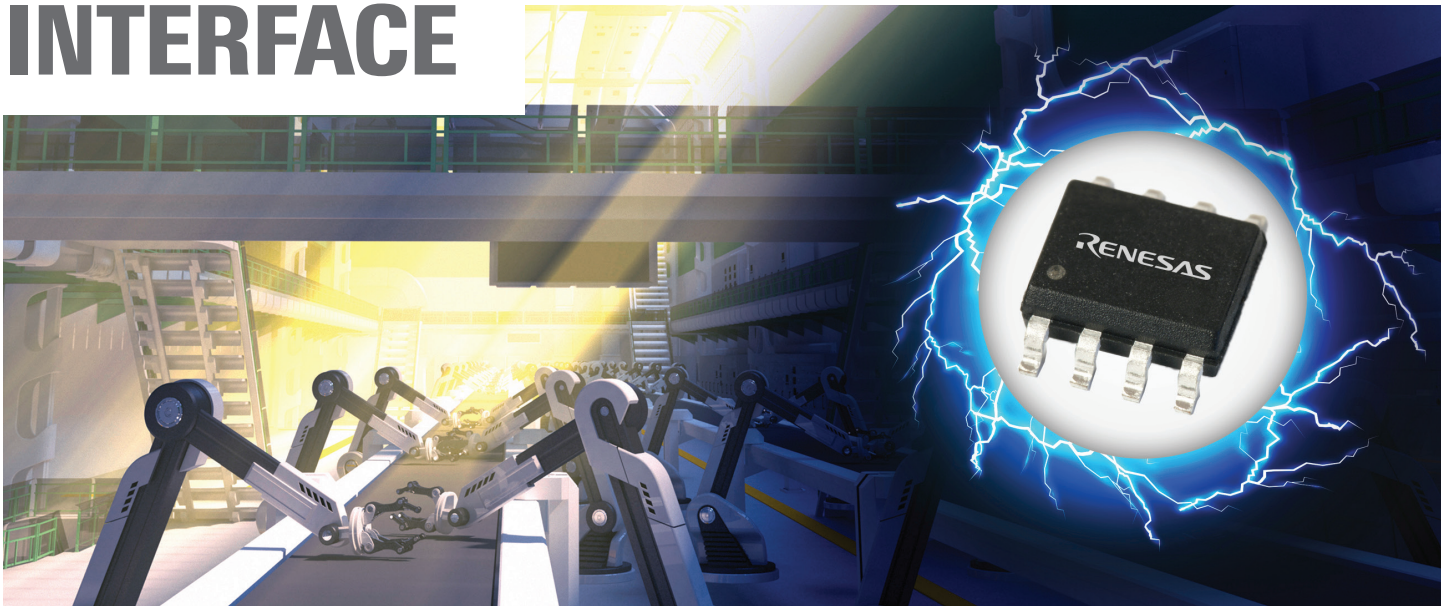


High Noise Immunity

The RAA78815x transceivers have the industry's highest EFT Immunity and Output Drive.

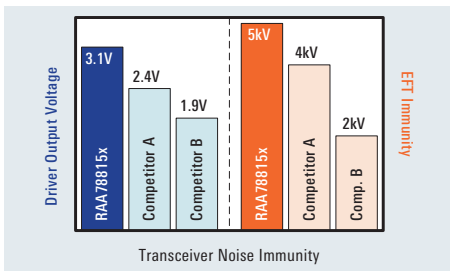


Ultra Low Supply Current

ISL3260xE Idle current is 9 times lower than that of low power transceiver ISL3172E.

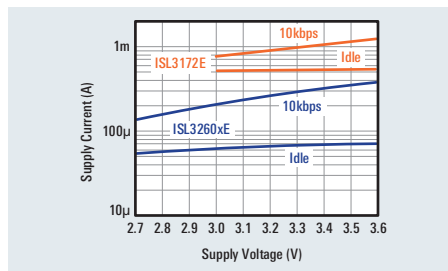

Space-Saving Small Package

Reduced package size enables smaller, more compact products.

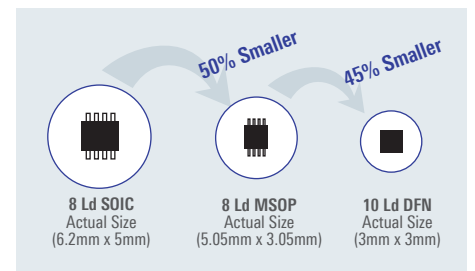


Broad Portfolio to Fit Your Needs

RS-485/422	RS-232	Multi-Protocol (RS-485 & RS-232)
<ul style="list-style-type: none"> High EFT immunity Transceivers (up to 5kV) High-speed Transceivers (20 to 100Mbps) Ultra-low Power Transceivers ($I_{cc} < 100\mu A$) Fault Protected Transceivers ($V_{BR} = \pm 60V$) 	<ul style="list-style-type: none"> Single, Dual, and Triple Transceivers (1 Tx/1 Rx, 2 Tx/2 Rx, 3 Tx/3 Rx) 8-Channel Transceivers (5 Tx/3 Rx and 3 Tx/5 Rx) 	<ul style="list-style-type: none"> Single and Dual Port devices Fixed and Programmable Ports Selectable RS-485 Speed (100kbps, 460kbps, 20Mbps)

Complete Signal Chain Solutions

Renesas' broad precision analog portfolio provides a wide range of next-gen precision instrumentation, medical, communication, and industrial process control applications where innovation, reliability, and dependability is central to the analog designs

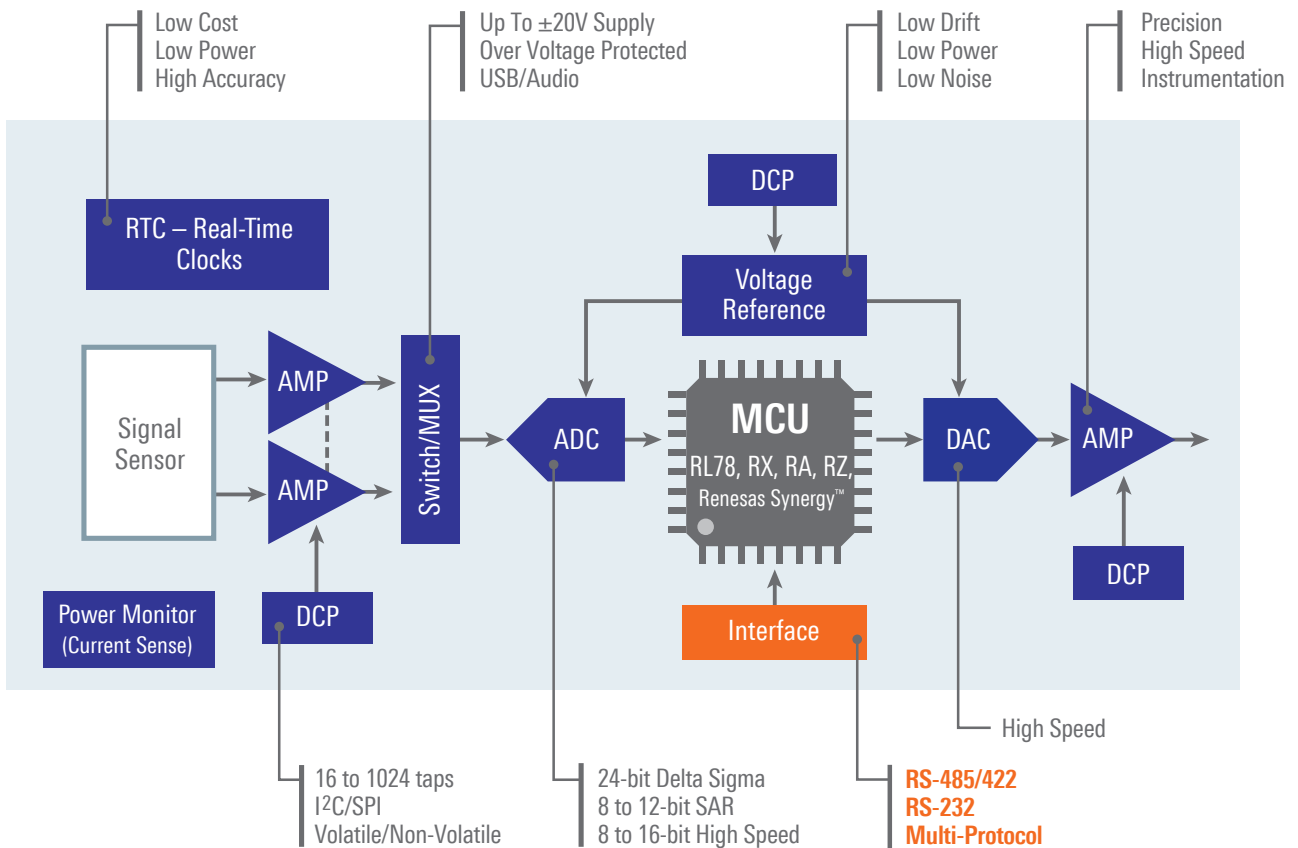

RS-485/RS-422

Half and full duplex transceivers in a variety of speed grades

Multiprotocol RS-485/RS-422 and RS-232

Device that integrate RS-232 and RS-485 transceivers into a single package

RS-232 Serial Interface

Transceivers featuring data rates up to 1Mbps, ESD protection, low power shut down modes

RS-485/RS-422 Transceivers

RS-485 is a multi-point interface bus, meaning multiple drivers and receivers can be connected to one bus. RS-485 uses differential signaling to achieve high noise immunity. Its common-mode voltage range reaches from -7V up to +12V.

RS-422 is a multi-drop interface bus, meaning only one driver but multiple receivers can connect to one bus. RS-422 also uses differential signaling. Its common-mode voltage range however is smaller and ranges from -7V up to +7V.

Note that RS-485 transceiver can be used in RS-422 networks but not vice versa. RS-422 devices cannot be used in RS-485 systems.

Renesas has a 50-year history in interface transceivers and we are still a market leader today. We have a full portfolio of RS-485/RS-422 transceivers suited to most design needs.

Transceivers with EFT Immunity per IEC61000-4-2

Part Number	VCC Range (V)	EFT (kV)	Data Rate (Mbps)	VOD (typ)(V)	Devices allowed on bus	Half / Full Duplex	IEC ESD (kV)	Quiescent ICC (μ A)(RX = on)	ISHDN (μ A)	Temp Range ($^{\circ}$ C)
RAA78815(0,3,6)	4.5 - 5.5	\pm 5	0.115, 1, 20	3.1	256	Full	\pm 10	550	0.07	-40 to +85
RAA78815(2,5,8)	4.5 - 5.5	\pm 5	0.115, 1, 20	3.1	256	Half	\pm 16	550	0.07	-40 to +85
RAA78817(0,3,6)	3.0 - 3.6	\pm 3	0.25, 0.5, 20	3.1	256	Full	\pm 10	480	0.01	-40 to +85
RAA78817(2,5,8)	3.0 - 3.6	\pm 3	0.25, 0.5, 20	3.1	256	Half	\pm 16	480	0.01	-40 to +85
ISL315(0,3,6)E	4.5 - 5.5	\pm 2	0.115, 1, 20	3.1	256	Full	\pm 10	550	0.07	-40 to +85
ISL315(2,5,8)E	4.5 - 5.5	\pm 2	0.115, 1, 20	3.1	256	Half	\pm 16	550	0.07	-40 to +85
ISL317(0,3,6)E	3.0 - 3.6	\pm 2	0.25, 0.5, 20	3.1	256	Full	\pm 10	480	0.01	-40 to +85
ISL317(2,5,8)E	3.0 - 3.6	\pm 2	0.25, 0.5, 20	3.1	256	Half	\pm 16	480	0.01	-40 to +85

High-Speed Transceivers (DR \geq 40Mbps)

Part Number	VCC Range (V)	Data Rate (Mbps)	VOD (typ)(V)	Half / Full Duplex	Devices allowed on bus	Hot Plug	IEC ESD (kV)	ICC (mA)	ISHDN (μ A)	Temp Range ($^{\circ}$ C)
ISL3179E	3.0 - 3.6	40	2.0	Half	160	Yes	\pm 16.5	2.6	0.05	-40 to +125
ISL3180E	3.0 - 3.6	40	2.0	Full	160	Yes	\pm 5	2.6	0.05	-40 to +85
ISL3159E	4.5 - 5.5	40	2.8	Half	160	Yes	\pm 15	2.6	0.05	-40 to +125
ISL3160E	4.5 - 5.5	40	2.8	Full	160	Yes	\pm 5	2.6	1.4	-40 to +125
ISL3259E	4.5 - 5.5	100	2.8	Half	160	Yes	\pm 15	2.6	0.05	-40 to +85

Ultra-Low Power Transceivers

Part Number	# TX	# RX	VCC Range (V)	Data Rates (kbps)	Duplex	# Devices allowed on bus	Bus ESD (kV)	Quiescent ICC (μ A)	ISHDN (μ A)	Temp Range ($^{\circ}$ C)
ISL32600E	1	1	2.7 - 3.6	256	Full	256	\pm 15	70	0.01	-40 to +125
ISL32601E	1	1	2.7 - 3.6	256	Half	256	\pm 15	70	0.01	-40 to +125
ISL32603E	1	1	1.8 - 3.6	460	Half	256	\pm 15	150	0.01	-40 to +125
ISL32612E	0	1	1.8 - 3.3	256 / 500	-	256	\pm 16.5	85	-	-40 to +125
ISL32614E	1	0	1.8 - 3.3	128 / 256	-	256	\pm 16.5	100	0.01	-40 to +125

Single RS-485/422 Drivers and Receivers

Part Number	# TX	# RX	VCC Range (V)	Data Rate (Mbps)	VOD (typ) (V)	V _L Pin (V)	TX / RX Enables	IEC ESD (kV)	ICC (μ A)	Temp Range ($^{\circ}$ C)
ISL3295E	1	0	3.0 - 5.5	20	2.0 (V _{CC} = 3.0V) 3.4 (V _{CC} = 4.5V)	-	Active High	\pm 16.5	120	-40 to +125
ISL3298E	1	0	3.0 - 5.5	20	2.0 (V _{CC} = 3.0V) 3.4 (V _{CC} = 4.5V)	1.6	Active High	\pm 16.5	120	-40 to +125
ISL3280E	0	1	3.0 - 5.5	20	-	-	None	\pm 16.5	400	-40 to +125
ISL3281E	0	1	3.0 - 5.5	20	-	-	Active High	\pm 16.5	400	-40 to +125
ISL3282E	0	1	3.0 - 5.5	20	-	1.6	Active Low	\pm 16.5	400	-40 to +125
ISL3283E	0	1	3.0 - 5.5	20	-	-	Active Low	\pm 16.5	400	-40 to +125

Quad RS-422 Drivers and RS-485/422 Receivers

Part Number	# TX	# RX	V _{CC} Range (V)	Data Rate (Mbps)	V _{OD} (typ) (V)	V _L Pin (V)	TX / RX Enables	IEC ESD (kV)	I _{CC} (μA)	Temp Range (°C)
RAA7884QT	4	0	3.0 – 5.5	50	2.6 (V _{CC} = 3.0V) 4.0 (V _{CC} = 4.5V)	–	Group	±16.5	0.8	-40 to +125
ISL32172E	4	0	3.0 – 5.5	32	2.6 (V _{CC} = 3.0V) 4.0 (V _{CC} = 4.5V)	–	Group	±16.5	0.6	-40 to +125
ISL32272E	4	0	3.0 – 5.5	10	2.6 (V _{CC} = 3.0V) 4.0 (V _{CC} = 4.5V)	–	Group	±16.5	0.6	-40 to +125
ISL32174E	4	0	3.0 – 5.5	32	2.6 (V _{CC} = 3.0V) 4.0 (V _{CC} = 4.5V)	–	Paired	±16.5	0.6	-40 to +125
ISL32179E	4	0	3.0 – 5.5	32	2.6 (V _{CC} = 3.0V) 4.0 (V _{CC} = 4.5V)	1.6	Individual & Group	±16.5	0.6	-40 to +125
ISL32173E	0	4	3.0 – 5.5	80	–	–	Group	±16.5	15	-40 to +125
ISL32177E	0	4	3.0 – 5.5	80	–	1.6	Individual & Group	±16.5	15	-40 to +125
ISL32273E	0	4	3.0 – 5.5	20	–	–	Group	±16.5	5.5	-40 to +125
ISL32275E	0	4	3.0 – 5.5	20	–	–	Paired	±16.5	5.5	-40 to +125
ISL32277E	0	4	3.0 – 5.5	20	–	1.6	Individual & Group	±16.5	5.5	-40 to +125
RAA7884QR	0	4	3.0 – 5.5	80	–	–	Group	±16.5	15	-40 to +125

Overvoltage Protected Transceivers

Part Number	V _{CC} Range (V)	OVP (V)	CMVR (V)	Half / Full Duplex	Data Rates (Mbps)	Devices allowed on bus	Hot Plug	IEC ESD (kV)	I _{CC} / ISHDN (mA)	Temp Range (°C)
ISL3243xE	3.0 – 5.5	±40	±15	HD / FD	0.25 / 1.0	128	No	±15	2.1 / 0.01	-40 to +85
ISL3245xE	3.0 – 5.5	±60	±20	HD / FD	0.25 / 1 / 20	128	No	±15	2.1 / 0.01	-40 to +85
ISL3247xE	4.5 – 5.5	±60	±15	HD / FD	0.25 / 1 / 15	128	Yes	±16.5	2.3 / 0.01	-40 to +85
ISL3249xE	4.5 – 5.5	±60	±25	HD / FD	0.25 / 1 / 15	128	Yes	±16.5	2.3 / 0.01	-40 to +85

x = 0,2,3,5,6,8

RS-232 Transceivers


RS-232 is a point-to-point interface between two RS-232 transceivers. RS-232 using single-ended signaling but with positive and negative voltages, such as ±5V to ±13V.

RS-232 Transceivers with Single, Dual, and Triple Channels

Part Number	Data Rate(Mbps)	V _{CC} (V)	Shutdown* Man./Auto	High ESD (kV)	Temp Range (°C)	Package
SINGLE TRANSCEIVER (1 Tx / 1 Rx)						
ICL3221E	0.5	3 – 5	A (B)	15	-40 to +85	SSOP16, TSSOP16
ICL3226E	0.5	3 – 5	A (E)	15	-40 to +85	SSOP16
DUAL TRANSCEIVERS (2 Tx / 2 Rx)						
ICL3222E	0.5	3 – 5	M	15	-40 to +85	SOIC18, SSOP20, TSSOP20
ICL3223E	0.5	3 – 5	A (B)	15	-40 to +85	SSOP20, TSSOP20
ICL3224E	0.5	3 – 5	A (E)	15	-40 to +85	SSOP20
ICL3225E	1	3 – 5	A (E)	15	-40 to +85	SSOP20
ICL3232E	0.5	3 – 5	M	15	-40 to +85	SOIC16, SSOP16, TSSOP16, TSSOP20
ISL4223E	0.5	3 – 5	A (B)	15	-40 to +85	QFN20
TRIPLE TRANSCEIVERS (3 Tx / 3 Rx)						
ISL4270E	0.5	3.0 – 5.5	A (E)	15	-40 to +85	QFN32
ISL83387E	0.5	3.0 – 5.5	A (E)	15	-40 to +85	TSSOP24

Multi-Protocol Transceivers

Multi-protocol transceivers support both RS-485 and RS-232 interface specifications. They can be used as compact interface solutions, or as interface bridges, converting signal from one standard to the other. Multi-protocol transceivers are in single or dual port variants, where each port can be configured either as a full duplex RS-485 transceiver, or as a two-channel RS-232 transceiver.

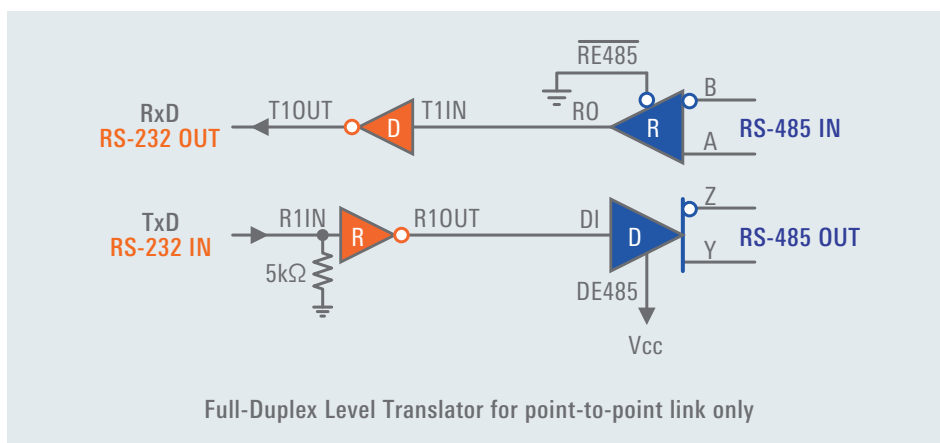


Multi-Protocol Transceivers with Single and Dual Ports

Part Number	# Ports	Config.	Data Rate (Mbps)		Vcc (V)	VL-Pin (1.8V)	RXEN Polarity	Loopback	ESD (kV)	Temp Range (°C)	Package
			RS-485	RS-232							
ISL33337E	2	Fixed	20, 0.115	0.4	3	No	Low	No	15	-40 to +85	QFN40
ISL33354E	2	Fixed	20, 0.115	0.4	5	No	Low	No	15	-40 to +85	SSOP28
ISL81387	1	Prog.	20, 0.46, 0.115	0.65	5	No	High	Yes	15	-40 to +85	SOIC20, SSOP20
ISL41387	1	Prog.	20, 0.46, 0.115	0.5	5	Yes	High and Low	Yes	15	-40 to +85	QFN40
ISL3330	1	Prog.	20, 0.46	0.4	3	No	High	Yes	15	-40 to +85	SSOP20
ISL3331	1	Prog.	20, 0.46, 0.115	0.4	3	Yes	High and Low	Yes	15	-40 to +85	QFN40
ISL81334	2	Prog.	20, 0.46, 0.115	0.65	5	No	None	Yes	15	-40 to +85	SOIC28, SSOP28
ISL41334	2	Prog.	20, 0.46, 0.115	0.5	5	Yes	Low	Yes	15	-40 to +85	QFN40
ISL3332	2	Prog.	20	0.4	3	No	None	Yes	15	-40 to +85	SSOP28
ISL3333	2	Prog.	20, 0.46, 0.115	0.4	3	Yes	Low	Yes	15	-40 to +85	QFN40

WINNING COMBOS

Renesas Industrial Signal Chain Solutions

Renesas offers dozens of Winning Combinations - expert designs showcasing Renesas' product portfolios of Embedded Processing, Analog, Power, and Connectivity. With these engineering-vetted designs, customers can take advantage of an elevated platform for their design ideas, accelerating their product development cycle and lowering their overall risk to bring their designs to market.

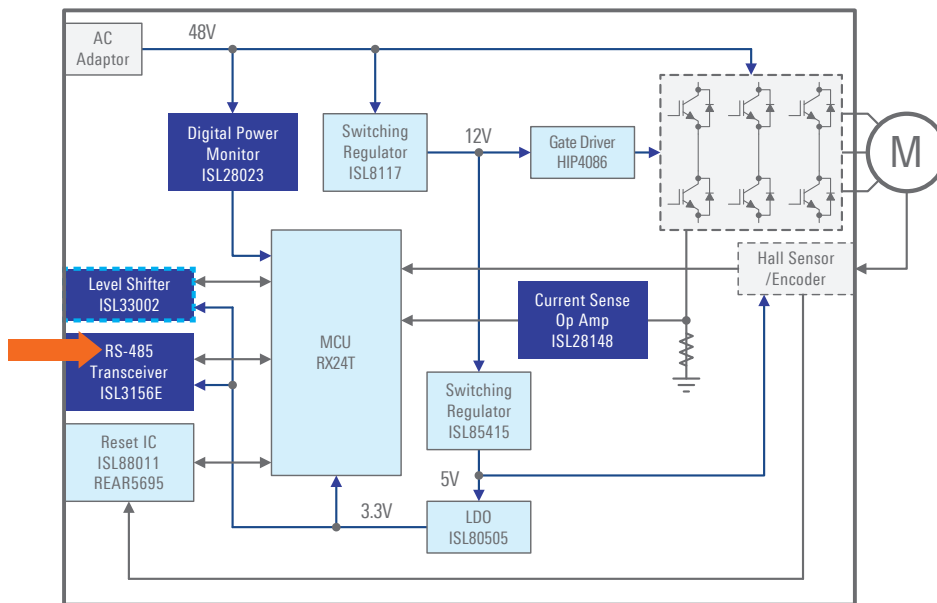

Featured Solution: 48V Position Control Solution

Solutions for BLDC motor applications have been increasing rapidly because of the demand for products that are smaller in size and provide high efficiency. The core of a BLDC motor design is a robust and reliable motor control circuit and a versatile MCU for a safe control algorithm. Key building blocks of a motor control circuit include a MOSFET driver, versatile MCU, voltage regulators, a cell balancer, and the battery charger. Analog Components highlighted in Blue.

Other Winning Combos featuring Analog products

WC Code	WC Title	Market	Application	Products	Product Type
CN082	Smart Industrial Gas Alarm	Industrial	Safety, Surveillance & security	ISL3158E	RS-485/RS-422
AS044	Green 3-Phase Smart Energy Meter	Power & Energy	Monitoring / Metering	ISL8485	RS-485/RS-422
EU115	Embedded Programmable Logic Controller (PLC) for Industrial	Industrial	Factory Automation	ISL3176E	RS-485/RS-422
AS044	Green 3-Phase Smart Energy Meter	Power and Energy	Monitoring / Metering	ISL8485	RS-485/RS-422
CN204	1-Phase Power Meter	Power and Energy	Monitoring / Metering	ISL3159E	RS-485/RS-422

Key Components	Key Features
ISL3156E	RS-485/RS-422 transceiver features high output drive and high ESD protection
ISL28023	High-side and Low-side digital current sense and voltage monitor with a serial interface
ISL8117	Synchronous Step-Down PWM Controller
HIP4086	3-Phase MOSFET Driver
ISL33002	I ² C Bus Buffer with Rise Time Accelerators and Hot Swap Capability
ISL88011	5 Ld Voltage Supervisor with Adjustable Power-On Reset, Dual Voltage Monitoring or Watchdog Timer Capability
RX24T	32-bit Microcontroller with On-chip FPU Enable to Drive Two Motors Simultaneously
ISL80505	High Performance Low Dropout Regulator
ISL85415	Synchronous Buck Regulator
ISL28148	Single Precision Rail-to-Rail Input-Output Op Amps with Very Low Input Bias Current

Notice

- Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
 - Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
 - No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
 - You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
 - You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
 - Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
 "Standard": Computers; office equipment, communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.
 "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.
 Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
 - No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
 - When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
 - Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
 - Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
 - Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
 - It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
 - This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
 - Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.
 (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.5.0-1 October 2020)

SALES OFFICES

Refer to "http://www.renesas.com/" for the latest and detailed information.

Renesas Electronics Corporation

TOYOSU FORESIA, 3-2-24 Toyosu, Koto-ku, Tokyo 135-0061, Japan

Renesas Electronics America Inc. Milpitas Campus

1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.
 Tel: +1-408-432-8888, Fax: +1-408-434-5351

Renesas Electronics America Inc. San Jose Campus

6024 Silver Creek Valley Road, San Jose, CA 95138, USA
 Tel: +1-408-284-8200, Fax: +1-408-284-2775

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
 Tel: +1-905-237-2004

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
 Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 101-T01, Floor 1, Building 7, Yard No. 7, 8th Street, Shangdi, Haidian District, Beijing 100085, China
 Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langa Road, Putuo District, Shanghai 200333, China
 Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
 Tel: +852-2265-6688, Fax: +852-2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
 Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, #06-02 Singapore 339949
 Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn Bhd.

Unit No 3A-1 Level 3A Tower 8 UOA Business Park, No 1 Jalan Pengaturcara U1/51A, Seksyen U1, 40150 Shah Alam, Selangor, Malaysia
 Tel: +60-3-5022-1288, Fax: +60-3-5022-1290

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India
 Tel: +91-80-67208700

Renesas Electronics Korea Co., Ltd.

17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea
 Tel: +82-2-558-3737, Fax: +82-2-558-5338