


## AC/DC Digital Power Controller for Two-Channel High Power Factor Dimmable LED Drivers

### 1 Description

The iW3640 is a two-stage, high-performance AC/DC offline power supply controller for dimmable LED luminaires. It applies advanced digital control technology to detect the dimmer type and phase, which provides dynamic impedance to interface the dimmer and control the LED brightness at the same time. The iW3640 uses Dialog's unique digital **Flickerless™** technology to eliminate visible flicker in the entire dimming range and minimize low frequency output ripple current. The iW3640 drives two-channel outputs. The duty cycle of the second channel varies with the dimming ratio.



With advanced dimmer detection technology, the iW3640 can operate with most wall dimmers including leading-edge dimmers (R-type or R-L type) and trailing-edge dimmers (R-C type). In addition, the iW3640's cycle-by-cycle waveform analysis technology allows fast dimmer setting response. When no dimmer is on the line, the iW3640 optimizes the power factor and minimizes the current harmonic distortion to the AC line.

The iW3640 operates the main power converter that delivers constant current to the LED load in quasi-resonant mode to provide high power efficiency and minimize electro-magnetic interference (EMI). It uses Dialog's patented **PrimAccurate™** primary-side sensing technology to achieve excellent LED current regulation under different AC line and LED load voltages, without using a secondary-side feedback circuit and eliminating the need for an optocoupler.

The iW3640 minimizes the external components count by simplifying the EMI filter with Dialog's **EZ-EMI®** technology. The intelligent dimmer detection technology eliminates the need for a high-power bleeder. Additionally, the digital control loop of the iW3640 maintains stable overall operating conditions without the need for loop compensation components.

### 2 Features

- Isolated/non-isolated offline 120V<sub>AC</sub>/230V<sub>AC</sub> LED driver up to 25W output power
- Wide line frequency ranges (from 45Hz to 66Hz)
- Meets IEC61000-3-2 requirement
- Total harmonic distortion < 15% with PF > 0.95
- Wide dimmer compatibility
  - » Leading-edge dimmer
  - » Trailing-edge dimmer
  - » Digital dimmer
  - » Occupancy sensors and timers
- Under 20% output ripple current
- Wide dimming range from 1% to 100%
- **Flickerless™** LED dimming
- Resonant control to achieve high efficiency (typical > 85% without dimmer)
- Over-temperature LED current foldback
  - » Small solution size
  - » Two-stage topology enables small-size input and output filter capacitors
- » 200kHz maximum switching frequency enables small transformer
- » Intelligent dimmer interface eliminates dedicated high-power bleeder
- **PrimAccurate™** primary-side sensing eliminates the need for optocoupler feedback
- Tight LED current regulation (± 5%)
- Fast start-up (< 0.5s without dimmer)
- Supports hot-plug LED module (Zhaga)
- Compatible with NEMA SSL6 dimming curve standard
- Supports wide LED output voltage range
- Multiple protection features:
  - » LED open-circuit and short-circuit protection
  - » Over-current and over-temperature protection
  - » Current sense resistor short-circuit protection
  - » AC line over-voltage/-frequency protection

### 3 Applications

- Dimmable LED retrofit lamps up to 25W
- Dimmable LED ballast and luminaires up to 25W

AC/DC Digital Power Controller for Two-Channel High Power Factor Dimmable LED Drivers

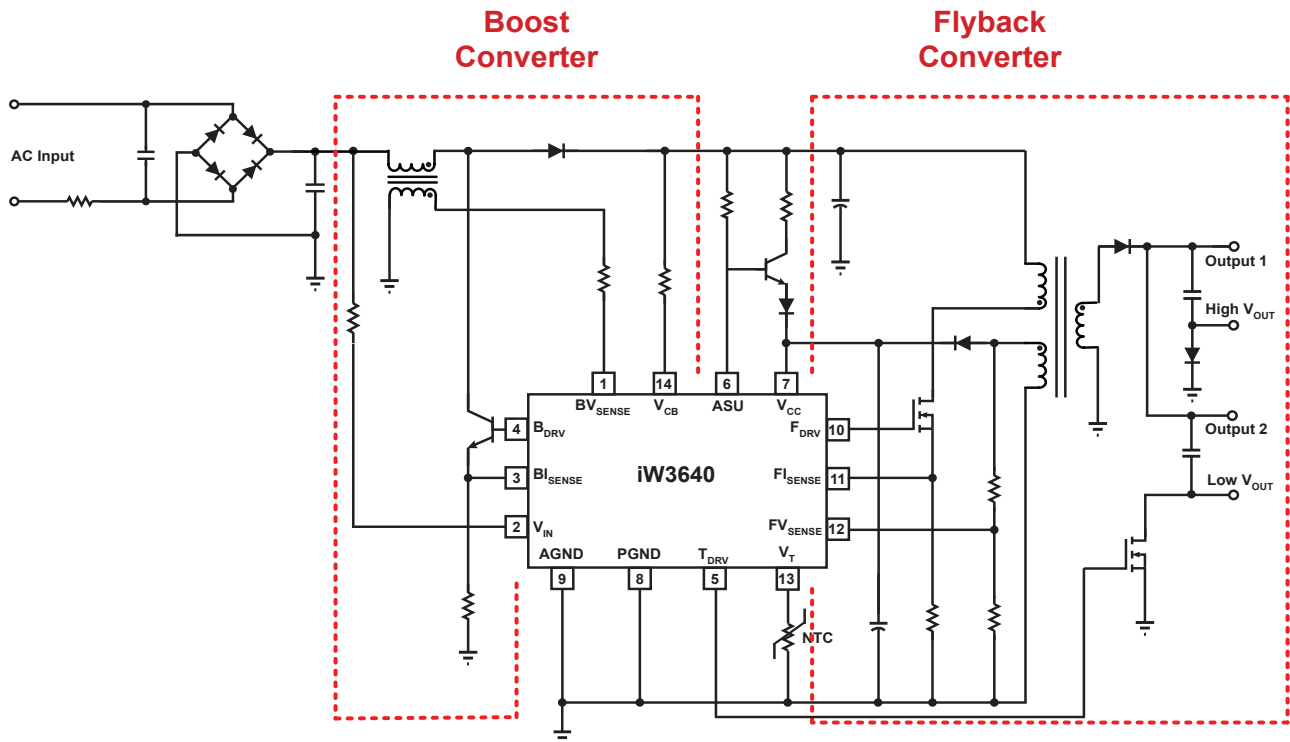


Figure 3.1 : iW3640 Simplified Schematic

## AC/DC Digital Power Controller for Two-Channel High Power Factor Dimmable LED Drivers

### 4 Pinout Description

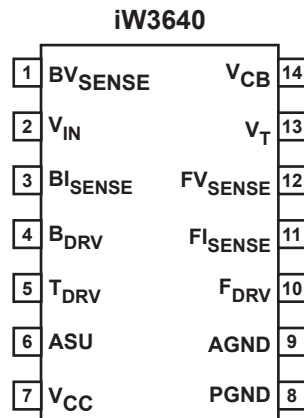


Figure 4.1 : 14-Lead SOIC Package

Pin Number	Pin Name	Type	Pin Description
1	BV <sub>SENSE</sub>	Analog Input	Boost inductor voltage feedback input
2	V <sub>IN</sub>	Analog Input	Rectified AC line voltage input
3	BI <sub>SENSE</sub>	Analog Input	Boost current sense input
4	B <sub>DRV</sub>	Output	Base drive output for boost BJT
5	T <sub>DRV</sub>	Analog In/Out	Driver parameter configuration pin and second channel driver
6	ASU	Output	Active start-up and bleeder control
7	V <sub>CC</sub>	Power	Power supply for control logic and voltage sense for power-on reset circuit
8	PGND	Ground	Power ground
9	AGND	Ground	Signal ground. It should be connected to the power ground on PCB.
10	F <sub>DRV</sub>	Output	Gate drive output for flyback MOSFET
11	FI <sub>SENSE</sub>	Analog Input	Flyback current sense (used for cycle-by-cycle peak current control and limit)
12	FV <sub>SENSE</sub>	Analog Input	Flyback voltage sense (used for primary-side regulation and ZVS)
13	V <sub>T</sub>	Analog Input	External power limit shutdown control and external over-temperature power derating
14	V <sub>CB</sub>	Analog Input	Boost output voltage feedback input

## AC/DC Digital Power Controller for Two-Channel High Power Factor Dimmable LED Drivers

### 5 Absolute Maximum Ratings


Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded. For maximum safe operating conditions, refer to Electrical Characteristics in Section 6.

Parameter	Symbol	Value	Units
DC supply voltage range (pin 7)	$V_{CC}$	-0.3 to 18	V
$F_{DRV}$ output (pin 10)		-0.3 to 18	V
$B_{DRV}$ output (pin 4)		-0.3 to 4.0	V
$T_{DRV}$ input (pin 5)		-0.3 to 4.0	V
$T_{DRV}$ output (pin 5)		-0.3 to 18	V
$FV_{SENSE}$ input (pin 12, $I \leq 10\text{mA}$ )		-0.7 to 4.0	V
$BV_{SENSE}$ input (pin 1, $I \leq 3\text{mA}$ )		-0.7 to 4.0	V
$V_{IN}$ input (pin 2)		-0.3 to 18	V
$V_{CB}$ input (pin 14)		-0.3 to 18	V
$FI_{SENSE}$ input (pin 11)		-0.3 to 4.0	V
$BI_{SENSE}$ input (pin 3)		-0.3 to 4.0	V
ASU output (pin 6)		-0.3 to 18	V
$V_T$ input (pin 13)		-0.3 to 4.0	V
Maximum junction temperature	$T_{JMAX}$	150	°C
Operating junction temperature	$T_{JOPT}$	-40 to 150	°C
Storage temperature	$T_{STG}$	-65 to 150	°C
Thermal Resistance Junction-to-PCB Board Surface Temperature	$\psi_{JB}$	45	°C/W
ESD rating per JEDEC JESD22-A114		$\pm 2,000$	V
Latch-up test per JESD78A		$\pm 100$	mA

AC/DC Digital Power Controller for Two-Channel High Power Factor Dimmable LED Drivers

6 Physical Dimensions

14-Lead SOIC Package

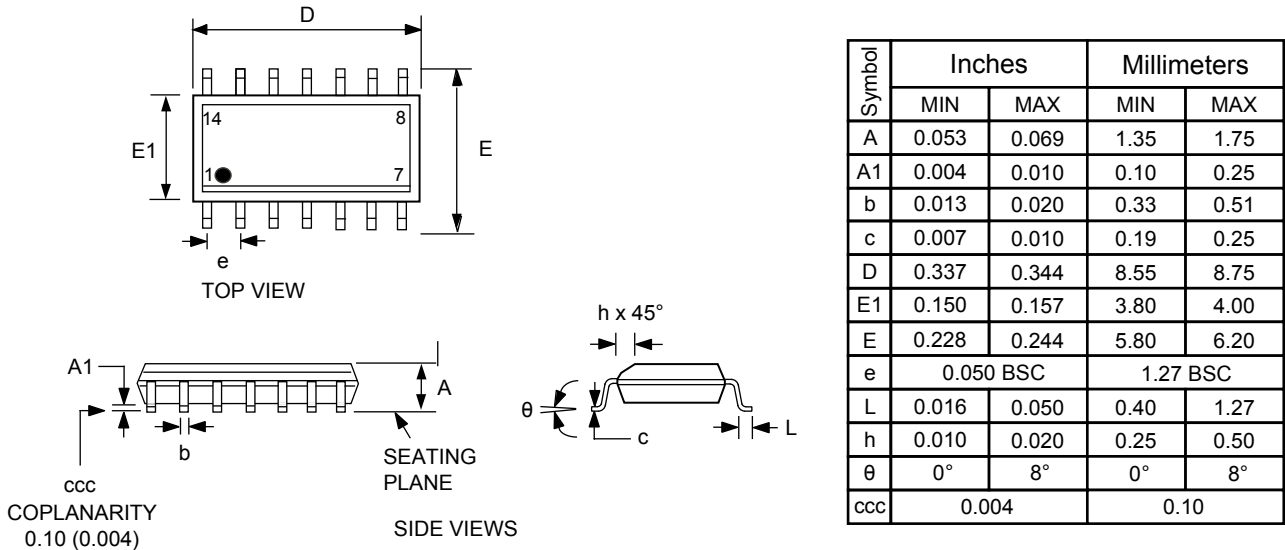

Compliant to JEDEC Standard MS12F

Controlling dimensions are in inches; millimeter dimensions are for reference only

This product is RoHS compliant and Halide free.

Soldering Temperature Resistance:

[a] Package is IPC/JEDEC Std 020D Moisture Sensitivity Level 1

[b] Package exceeds JEDEC Std No. 22-A111 for Solder Immersion Resistance; package can withstand 10 s immersion < 260°C

Dimension D does not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15 mm per end. Dimension E does not include interlead flash or protrusion. Interlead flash or protrusion shall not exceed 0.25 mm per side.

The package top may be smaller than the package bottom. Dimensions D and E are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs and interlead flash, but including any mismatch between the top and bottom of the plastic body.

Figure 6.1 : 14-Lead SOIC Package

7 Ordering Information

Part no.	Options	Package	Description
iW3640-00	Low line (120V <sub>AC</sub> ) phase cut color mixing	SOIC-14	Tape & Reel <sup>1</sup>
iW3640-01	High line (230V <sub>AC</sub> ) phase cut color mixing	SOIC-14	Tape & Reel <sup>1</sup>

Note 1: Tape & Reel packing quantity is 2,500/reel.

## AC/DC Digital Power Controller for Two-Channel High Power Factor Dimmable LED Drivers

### IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas’ products are provided only subject to Renesas’ Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

© 2022 Renesas Electronics Corporation. All rights reserved.

### RoHS Compliance

Dialog Semiconductor’s suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

(Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.