

HS-303CEH

Neutron Testing

TR031  
Rev.0.00  
July 12, 2016

## Introduction

This report summarizes results of 1MeV equivalent neutron testing of the [HS-303CEH](#) dual analog switch. The test was conducted in order to determine the sensitivity of the part to displacement damage (DD) caused by neutron or proton environments. Neutron fluences ranged from  $2 \times 10^{12} \text{ n/cm}^2$  to  $1 \times 10^{14} \text{ n/cm}^2$ . This project was carried out in collaboration with Boeing (El Segundo, CA), whose support is gratefully acknowledged.

## Reference Documents

- MIL-STD-883 test method 1017
- [HS-303CEH](#) datasheet
- Standard Microcircuit Drawing (SMD) [5962-95813](#)

## Part Description

The HS-303CEH is a dual analog switch fabricated using Intersil's dielectrically isolated Radiation Hardened Silicon Gate (RSG) process technology to insure latch-up free operation. It is pinout compatible and functionally equivalent to the HS-303RH. This switch offers low-resistance switching performance for analog voltages up to the supply rails. ON-resistance is low and stays reasonably constant over the full range of operating voltage and current. Break-before-make switching is controlled by 5V digital inputs. The HS-303CEH can operate with rails of  $\pm 15\text{V}$ .

Specifications for Radiation Hardened QML devices are controlled by the Defense Logistics Agency Land and Maritime (DLA). The SMD number listed in the SMD must be used when ordering. Detailed electrical specifications for the HS-303CEH are contained in SMD [5962-95813](#).

The HS-303CEH is acceptance tested to total dose (TID) levels of 100krad(Si) at high dose rate (50-300rad(Si)/s) and 50krad(Si) at low dose rate ( $< 0.01\text{rad(Si)/s}$ ).

TABLE 1. HS-303CEH PIN ASSIGNMENTS

TERMINAL NUMBER	TERMINAL SYMBOL	TERMINAL NUMBER	TERMINAL SYMBOL
1	NC	8	V-
2	S3	9	IN2
3	D3	10	S2
4	D1	11	D2
5	S1	12	D4
6	IN1	13	S4
7	GND	14	V+

## Test Description

### Irradiation Facilities

1MeV equivalent neutron irradiation was performed by the Boeing team at the White Sands Missile Range fast burst reactor. Dosimetry data can be furnished upon request. Parts were tested in an unbiased configuration with all leads shorted together in general accordance with TM 1017 of MIL-STD-883. As neutron irradiation activates many of the heavier elements found in a packaged integrated circuit, the parts exposed at the higher neutron levels required considerable "cooldown" time before being shipped back to Intersil for electrical testing.

### Test Fixturing

No formal irradiation test fixturing was involved. These DD tests are termed "bag tests" in the sense that the parts are irradiated in an electrically inactive state with all leads shorted together.

### Characterization Equipment and Procedures

Electrical testing was performed before and after irradiation using the Intersil Palm Bay, FL Automated Test Equipment (ATE). All electrical testing was performed at room temperature.

### Experimental Matrix

The experimental matrix consisted of 5 samples irradiated at  $2 \times 10^{12} \text{ n/cm}^2$ , 5 irradiated at  $1 \times 10^{13} \text{ n/cm}^2$ , 5 irradiated at  $3 \times 10^{13} \text{ n/cm}^2$  and 5 irradiated at  $1 \times 10^{14} \text{ n/cm}^2$ . Five control units were used. The HS-303CEH samples were drawn from fabrication lot G2J7DFA and were packaged in the standard 14 Ld ceramic production package, code CDFP3-F14. Samples were screened to the SMD limits over temperature before the start of neutron testing.

## Results

Neutron testing of the HS-303CEH is complete and the results are reported in the balance of this report. It should be carefully realized when interpreting the data that each neutron irradiation was performed on a different five-unit sample; this is not total dose testing, where the damage is cumulative over a number of downpoints.

### Attributes Data

TABLE 2. HS-303CEH ATTRIBUTES DATA

PART	SERIAL	SAMPLE SIZE	FLUENCE, n/cm <sup>2</sup>	PASS (Note 1)	FAIL	NOTES
HS-303CEH	1-5	5	2x10 <sup>12</sup>	5	0	All passed
HS-303CEH	6-10	5	1x10 <sup>13</sup>	5	0	All passed
HS-303CEH	11-15	5	3x10 <sup>13</sup>	5	0	All passed
HS-303CEH	16-20	5	1x10 <sup>14</sup>	5	0	All passed

NOTE:

1. "Pass" indicates a sample that passes all SMD limits.

### Variables Data

The plots in [Figures 1](#) through [10](#) show data plots for key parameters before and after irradiation to each level. The reported parameters and their datasheet limits are shown in [Table 3 on page 8](#). We plot the data for Channel 1 in all cases; no measure differences in the responses of the other four channels were seen in the data.

The plots show the population median of each parameter as a function of neutron irradiation as well as population maximum and minimum error bars. We chose to plot the median because of the small sample sizes (five per cell) involved. We also show the applicable post-total dose electrical limits as taken from the SMD; it should be carefully noted that these limits are provided for *guidance only* as the HS-303CEH is not specified or guaranteed for the neutron environment. Intersil does not design, qualify or guarantee its parts for the DD environment, but has performed limited collaborative neutron testing for customer guidance.

## Variables Data Plots

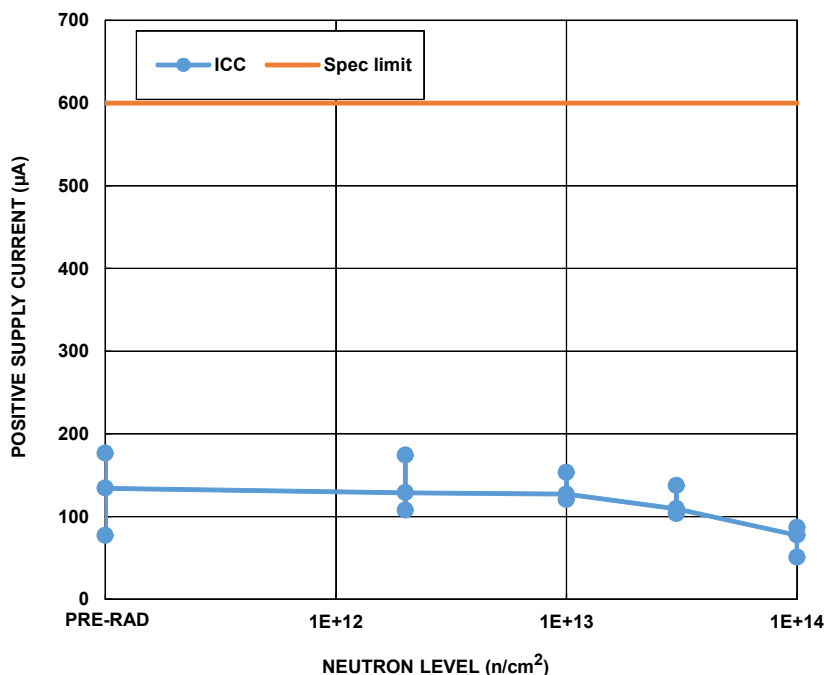
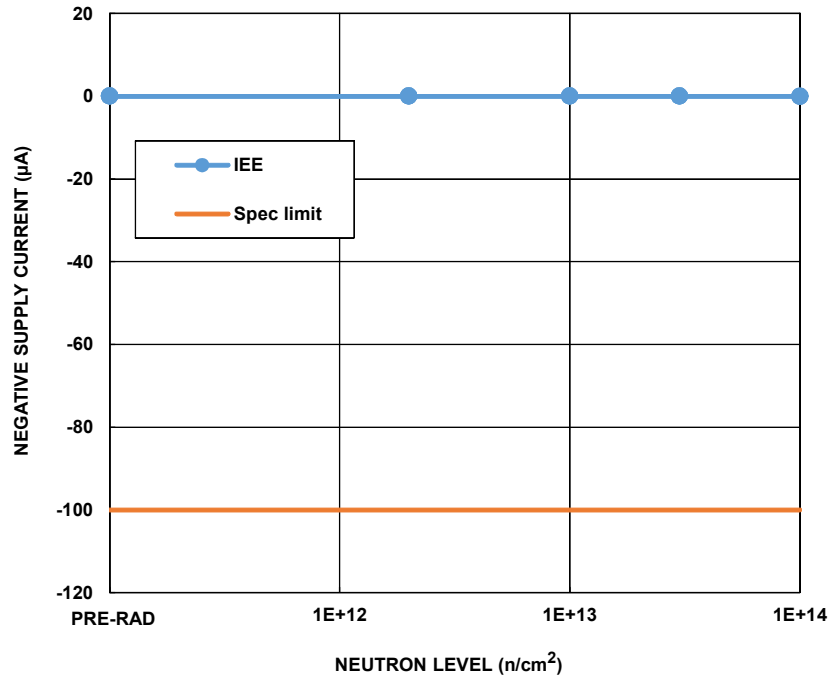
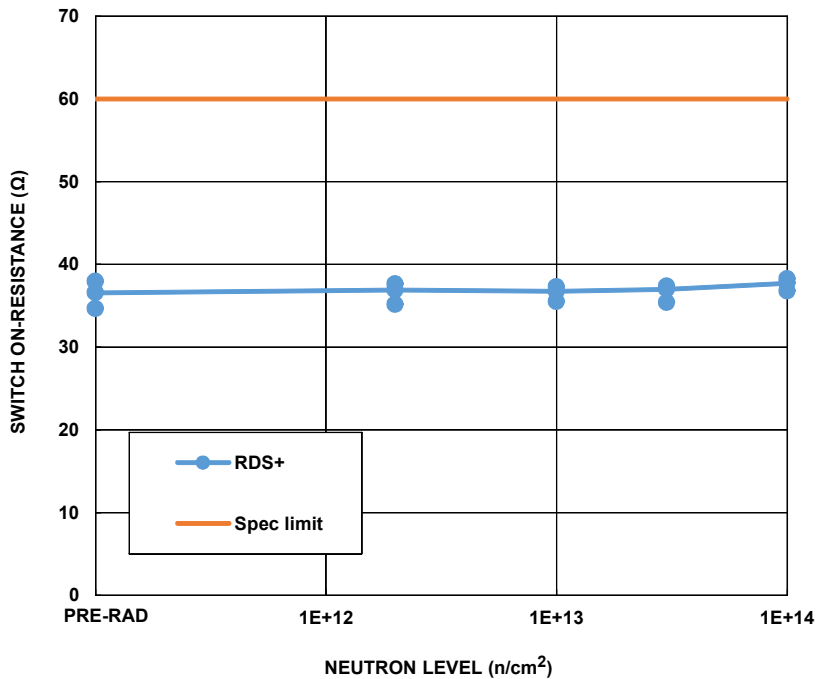


FIGURE 1. HS-303CEH positive supply current, all four channels, as a function of 1MeV equivalent neutron irradiation at 2x10<sup>12</sup>n/cm<sup>2</sup>, 1x10<sup>13</sup>n/cm<sup>2</sup>, 3x10<sup>13</sup>n/cm<sup>2</sup> and 1x10<sup>14</sup>n/cm<sup>2</sup>. The plot shows the population median and minimum and maximum error bars at each downpoint. Sample size for each cell was 5. The post-total dose irradiation SMD limit is 600µA maximum.

**Variables Data Plots (Continued)**

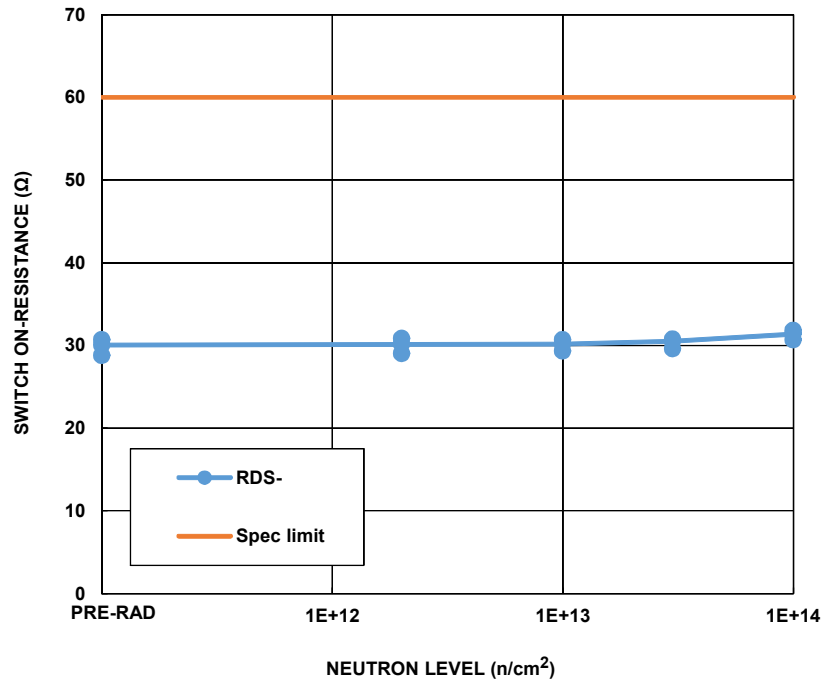


**FIGURE 2.** HS-303CEH negative supply current, all four channels, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limit is  $-100 \mu\text{A}$  minimum.

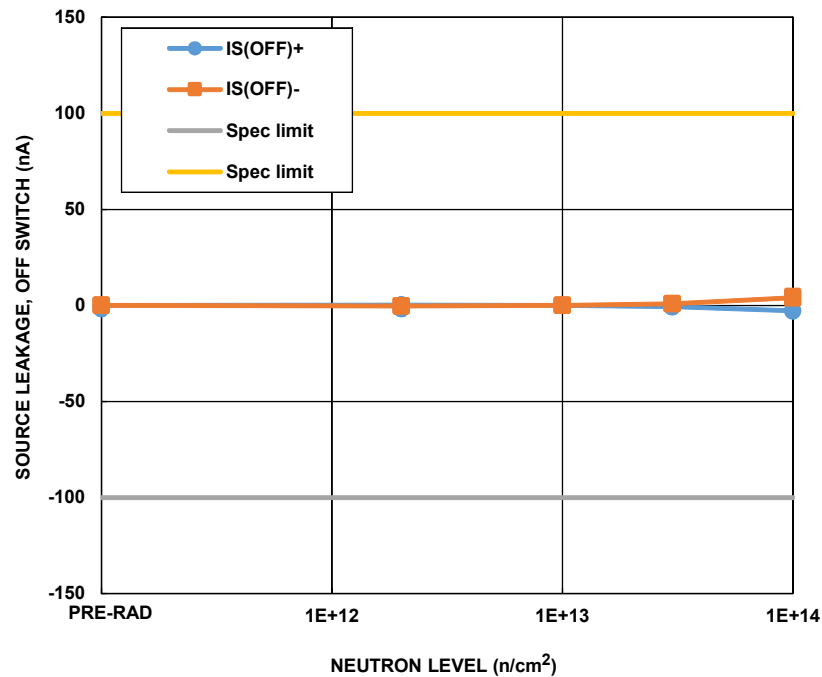


**FIGURE 3.** HS-303CEH switch ON-resistance, Channel 1, drain voltage +10V, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limit is  $60 \Omega$  maximum.

**Variables Data Plots (Continued)**

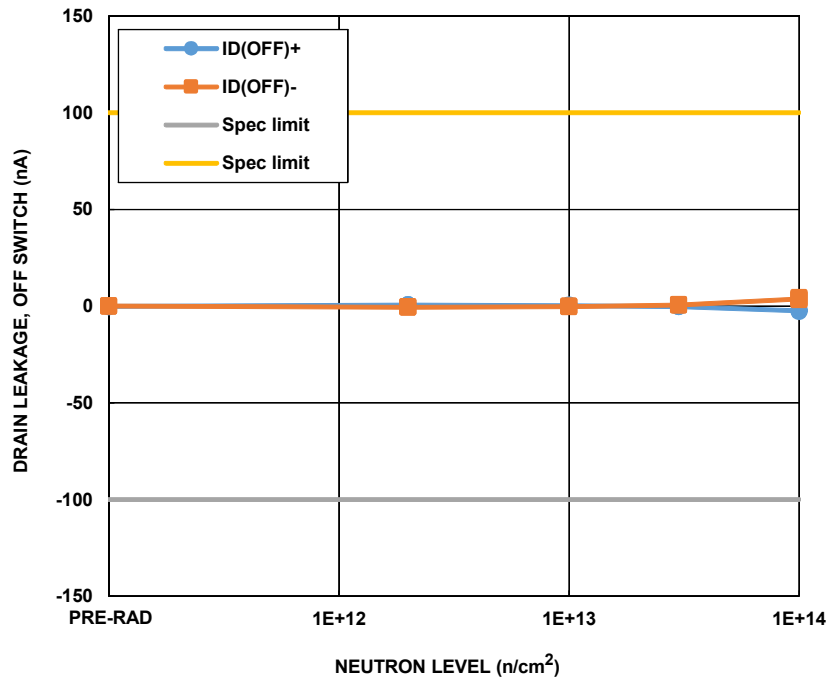


**FIGURE 4.** HS-303CEH switch ON-resistance, Channel 1, drain voltage -10V, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limit is  $60 \Omega$  maximum.

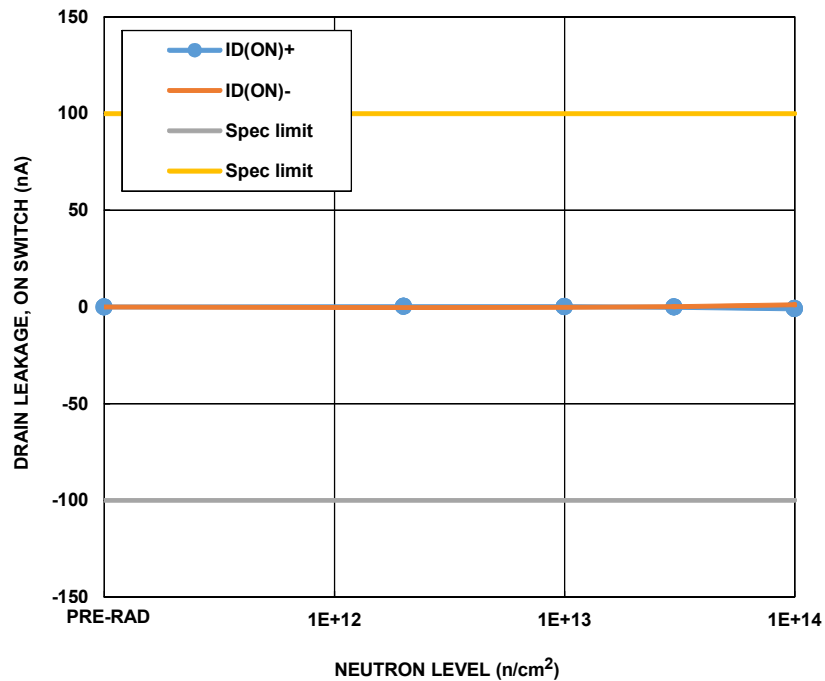


**FIGURE 5.** HS-303CEH leakage current into the source terminal of an OFF switch, Channel 1, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are -100nA to 100nA.

**Variables Data Plots (Continued)**



**FIGURE 6.** HS-303CEH leakage current into the drain terminal of an OFF switch, Channel 1, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each downpoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are -100nA to 100nA.



**FIGURE 7.** HS-303CEH leakage current into the drain terminal of an ON switch, Channel 1, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each downpoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are -100nA to 100nA.

**Variables Data Plots (Continued)**

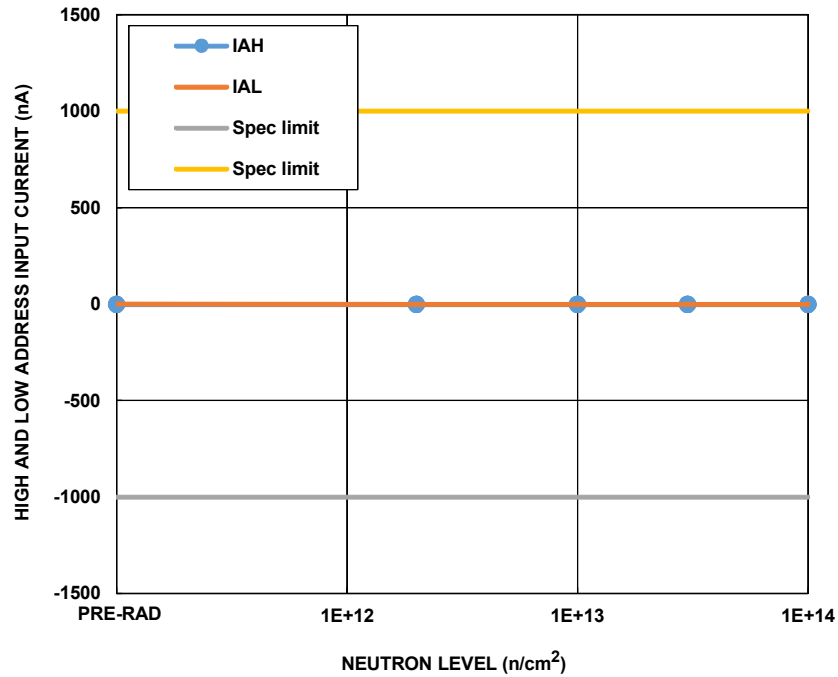


FIGURE 8. HS-303CEH HIGH and LOW address input current, Address A1 as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are -1000nA to 1000nA.

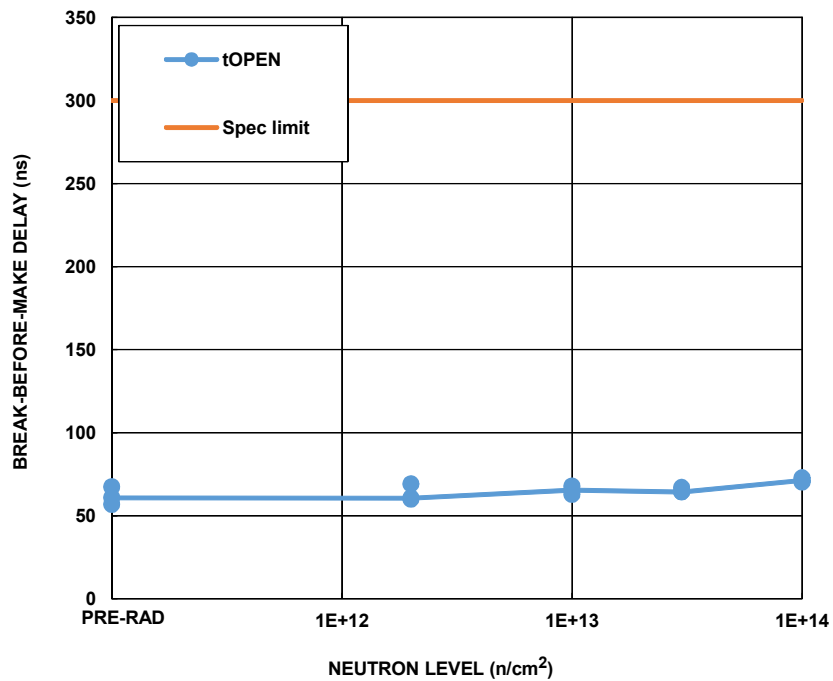
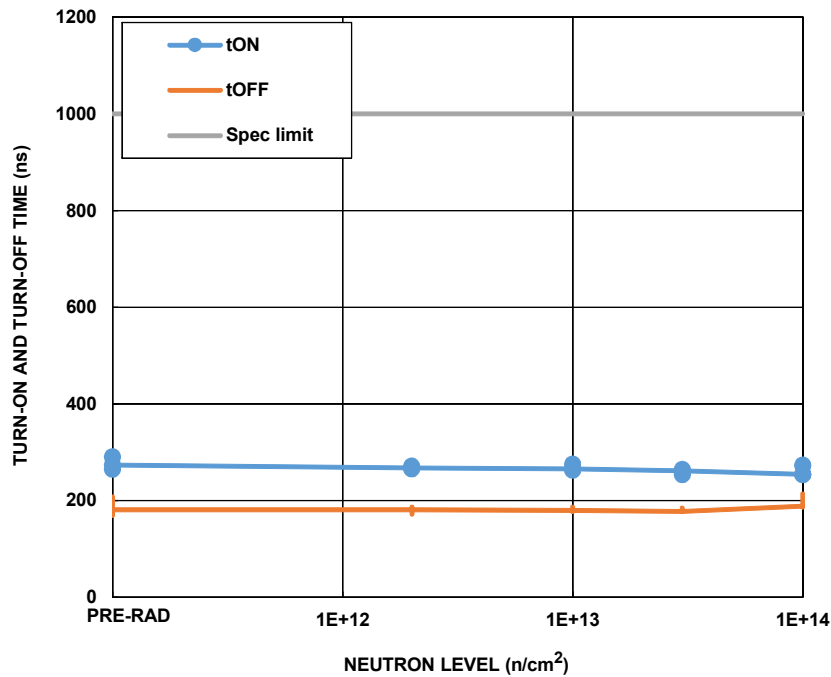


FIGURE 9. HS-303CEH break-before-make delay, Channel 1, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 300ns maximum.

**Variables Data Plots (Continued)**



**FIGURE 10.** HS-303CEH switch turn-on and turn-off time, Channel 1, as a function of 1MeV equivalent neutron irradiation at  $2 \times 10^{12} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ . The plot shows the population median and minimum and maximum error bars at each datapoint. Sample size for each cell was 5. The post-total dose irradiation SMD limits are 1000ns maximum for both parameters.

**Conclusion**

This report summarizes results of 1MeV equivalent neutron testing of the HS-303CEH dual analog switch. The test was conducted in order to determine the sensitivity of the part to Displacement Damage (DD) caused by neutron or proton environments in space. Neutron fluences ranged from  $2 \times 10^{12} \text{ n/cm}^2$  to  $1 \times 10^{14} \text{ n/cm}^2$ . This test was carried out as part of a collaborative project with Boeing (El Segundo, CA), whose support is gratefully acknowledged.

The samples met all specifications (Bin 1) after  $2 \times 10^{14} \text{ n/cm}^2$ ,  $1 \times 10^{13} \text{ n/cm}^2$ ,  $3 \times 10^{13} \text{ n/cm}^2$  and  $1 \times 10^{14} \text{ n/cm}^2$ .

## Appendices

### Reported Parameters

Reported parameters are shown in [Table 3](#). The limits are taken from the applicable SMD and are provided for guidance only as the part is not designed or guaranteed for the neutron environment. The plots show the population median and minimum and maximum error bars at each downpoint.

TABLE 3. REPORTED PARAMETERS

FIGURE	PARAMETER	LIMIT, LOW	LIMIT, HIGH	UNITS	NOTES
<a href="#">1</a>	Positive Supply Current	-	600	μA	All four channels
<a href="#">2</a>	Negative Supply Current	-100	-	μA	All four channels
<a href="#">3</a>	Switch ON-Resistance	-	60	Ω	Channel 1, drain voltage 10V
<a href="#">4</a>	Switch ON-Resistance	-	60	Ω	Channel 1, drain voltage -10V
<a href="#">5</a>	Leakage Current into the Source Terminal of an Off Switch	-100	100	nA	Channel 1
<a href="#">6</a>	Leakage Current into the Drain Terminal of an Off Switch	-100	100	nA	Channel 1
<a href="#">7</a>	Leakage Current into the Drain Terminal of an On Switch	-100	100	nA	Channel 1
<a href="#">8</a>	Address Input HIGH Current	-1000	1000	nA	Address A1
	Address Input LOW Current	-1000	1000	nA	Address A1
<a href="#">9</a>	Break-Before-Make-Delay	-	300	ns	Channel 1
<a href="#">10</a>	Switch Turn-On Time	-	1000	ns	Channel 1
	Switch Turn-Off Time	-	1000	ns	Channel 1



## Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.  
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.  
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.  
Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.
6. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
11. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.  
(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.  
(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Rev.4.0-1 November 2017)



### SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com/>" for the latest and detailed information.

**Renesas Electronics America Inc.**  
1001 Murphy Ranch Road, Milpitas, CA 95035, U.S.A.  
Tel: +1-408-432-8888, Fax: +1-408-434-5351

**Renesas Electronics Canada Limited**  
9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3  
Tel: +1-905-237-2004

**Renesas Electronics Europe Limited**  
Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.  
Tel: +44-1628-651-700, Fax: +44-1628-651-804

**Renesas Electronics Europe GmbH**  
Arcadiastrasse 10, 40472 Düsseldorf, Germany  
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

**Renesas Electronics (China) Co., Ltd.**  
Room 1709 Quantum Plaza, No.27 ZhichunLu, Haidian District, Beijing, 100191 P. R. China  
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

**Renesas Electronics (Shanghai) Co., Ltd.**  
Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, 200333 P. R. China  
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

**Renesas Electronics Hong Kong Limited**  
Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong  
Tel: +852-2265-6688, Fax: +852-2886-9022

**Renesas Electronics Taiwan Co., Ltd.**  
13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan  
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

**Renesas Electronics Singapore Pte. Ltd.**  
80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949  
Tel: +65-6213-0200, Fax: +65-6213-0300

**Renesas Electronics Malaysia Sdn.Bhd.**  
Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia  
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

**Renesas Electronics India Pvt. Ltd.**  
No.777C, 100 Feet Road, HAL 2nd Stage, Indiranagar, Bangalore 560 038, India  
Tel: +91-80-67208700, Fax: +91-80-67208777

**Renesas Electronics Korea Co., Ltd.**  
17F, KAMCO Yangjae Tower, 262, Gangnam-daero, Gangnam-gu, Seoul, 06265 Korea  
Tel: +82-2-558-3737, Fax: +82-2-558-5338