

Contents

1. Sensor Board Details	2
1.1 Test Conditions	2
1.2 Tx Coil and Frequency Parameters	2
1.3 Calibration Register Settings	2
1.4 Sensor Board	3
1.5 Sensor Target	4
2. Measurement Setup	5
2.1 General	5
2.2 Design-Specific Test Setup	5
3. Measurement Results	6
3.1 Angle Error at Different Air Gaps	6
3.2 Angle Error at Different Displacements	8
3.3 Angle Error at Different Tilt	9
4. Revision History	10

Figures

Figure 1. Sensor Board	3
Figure 2. Sensor Target	4
Figure 3. Setup	5
Figure 4. Error over Air Gap	6
Figure 5. Sine over Air Gap	7
Figure 6. Cosine over Air Gap	7
Figure 7. Error over Displacement	8
Figure 8. Error over Tilt	9

Tables

Table 1. Sensor Characteristics	2
Table 2. Sensor Characteristics	2
Table 3. Registers Dump	2

1. Sensor Board Details

Table 1. Sensor Characteristics

Ref. Design ID	Design Type	Single/Redundant	Number of Pole Pairs	PCB Size [mm]	Coil Size D _{out} / D _{in} [mm]	Target Size D _{out} / D _{in} [mm]	Air Gap (Nominal) [mm]	Accuracy (Nominal) [deg mech.] / [deg el.]
R_42_V31	Rotary	Single	4	64 x 40	32 / 18	35 / 13	2.0	±0.051 / ±0.204

1.1 Test Conditions

- Measurements are done in a lab environment at room temperature
- Sensor Board is powered using the IPS communication board
- The supply voltage level is 5V (VDD = 5V)
- The nominal accuracy is measured @ nominal air gap and 1000 RPM
- Inductance and the DC resistance of the transmitter coil is measured using a Smart Tweezer ST5S LCR Meter.

1.2 Tx Coil and Frequency Parameters

Set C_{TX} transmit frequency between 2.2 and 5.6 MHz. To ensure a high quality factor, a C0G capacitor was used. F_{TX} is calculated from the measured inductance and the nominal capacitor values. F_{TX} was measured by the IC itself.

Table 2. Sensor Characteristics

L _{TX}	R _L	C _{TX}	F _{TX} calc.	F _{TX} meas.
1.6 μH	1.31 Ω	1100 pF	3.794 MHz	3.75 MHz

1.3 Calibration Register Settings

The bias current (address 0x07) was set using the following equation:

$$I_{Bias} = 0.06 \cdot VDD \cdot R_L \cdot \frac{C_{TX}}{L_{TX}}$$

The receiver gain (address 0x02) is set to get an output level 1.4V to 2.5V for 5V operation. The sensor signals is calibrated at the nominal air gap without any displacement before the measurement. Amplitude mismatch is calibrated using the receiver fine gain registers (address 0x03 and 0x05), and signal offsets are compensated using the receiver offset registers (address 0x04 and 0x06) of IPS2200.

Table 3. Registers Dump

0x00	0x01	0x02	0x03	0x04	0x05	0x06	0x07	0x08
0x0323	0x0101	0x008C	0x0000	0x0046	0x0000	0x0045	0x00A2	0x015E
0x09	0x0A	0x0B	0x0C	0x0D	0x0E	0x12	0x13	
0x0000	0x0000	0x0000	0x0000	0x0000	0x0000	0x000A	0x0001	

1.4 Sensor Board

Figure 1. displays the sensor board layout, consisting of one transmit coil, two receive coils, IPS2200 and additional passive components.

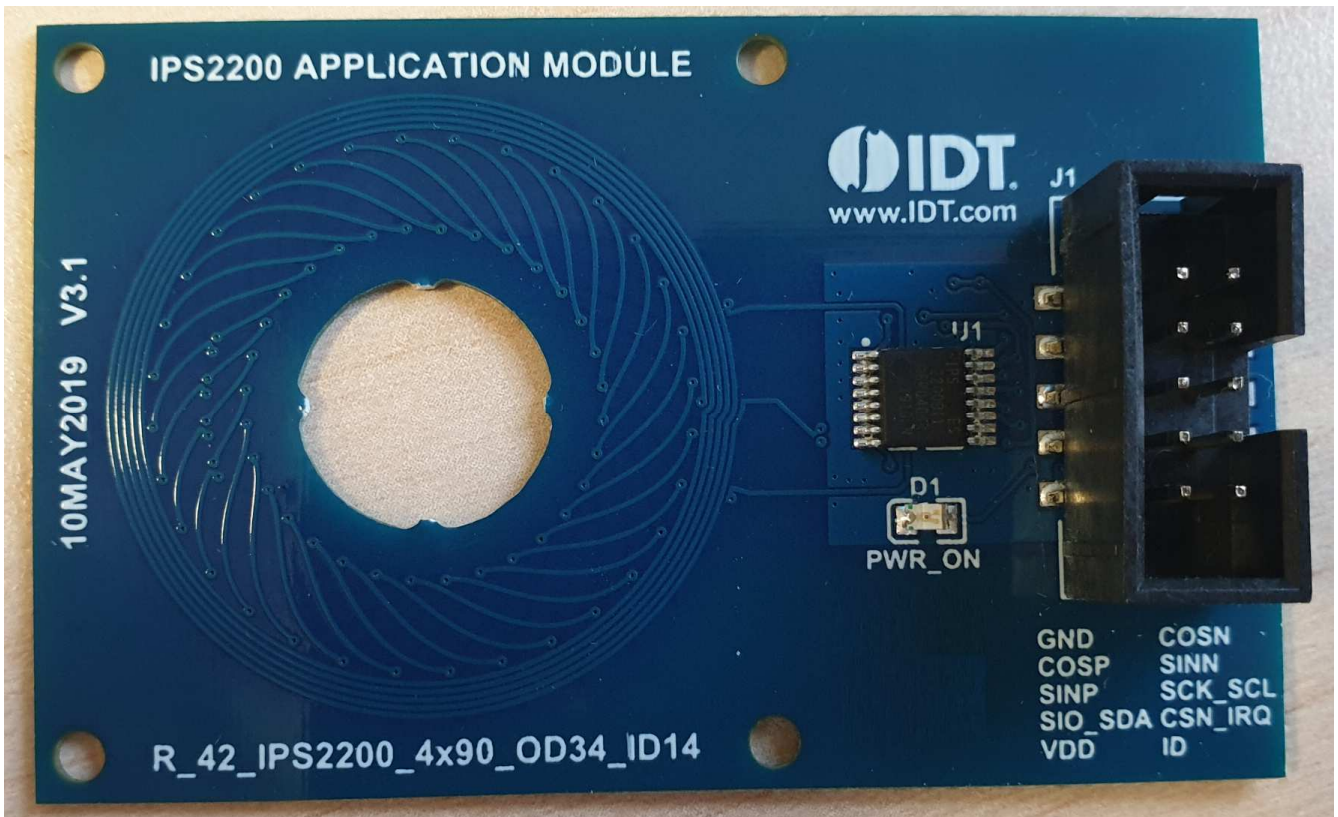


Figure 1. Sensor Board

1.5 Sensor Target

Figure 2. displays the target used during the measurements.



Figure 2. Sensor Target

2. Measurement Setup

2.1 General

All measurements are performed on a 4-axis positioning test bench. During the measurement, the target is rotating continuously. The rotor position is calculated from the sensor output signals and compared to the rotor position measured by high precision reference encoder.

$$f_{mechanical} = real\ sensor\ position - ideal\ position\ value$$

2.2 Design-Specific Test Setup

Figure 3. displays the test setup, the sensor board and target are mounted on the 4 axis positioning test bench.

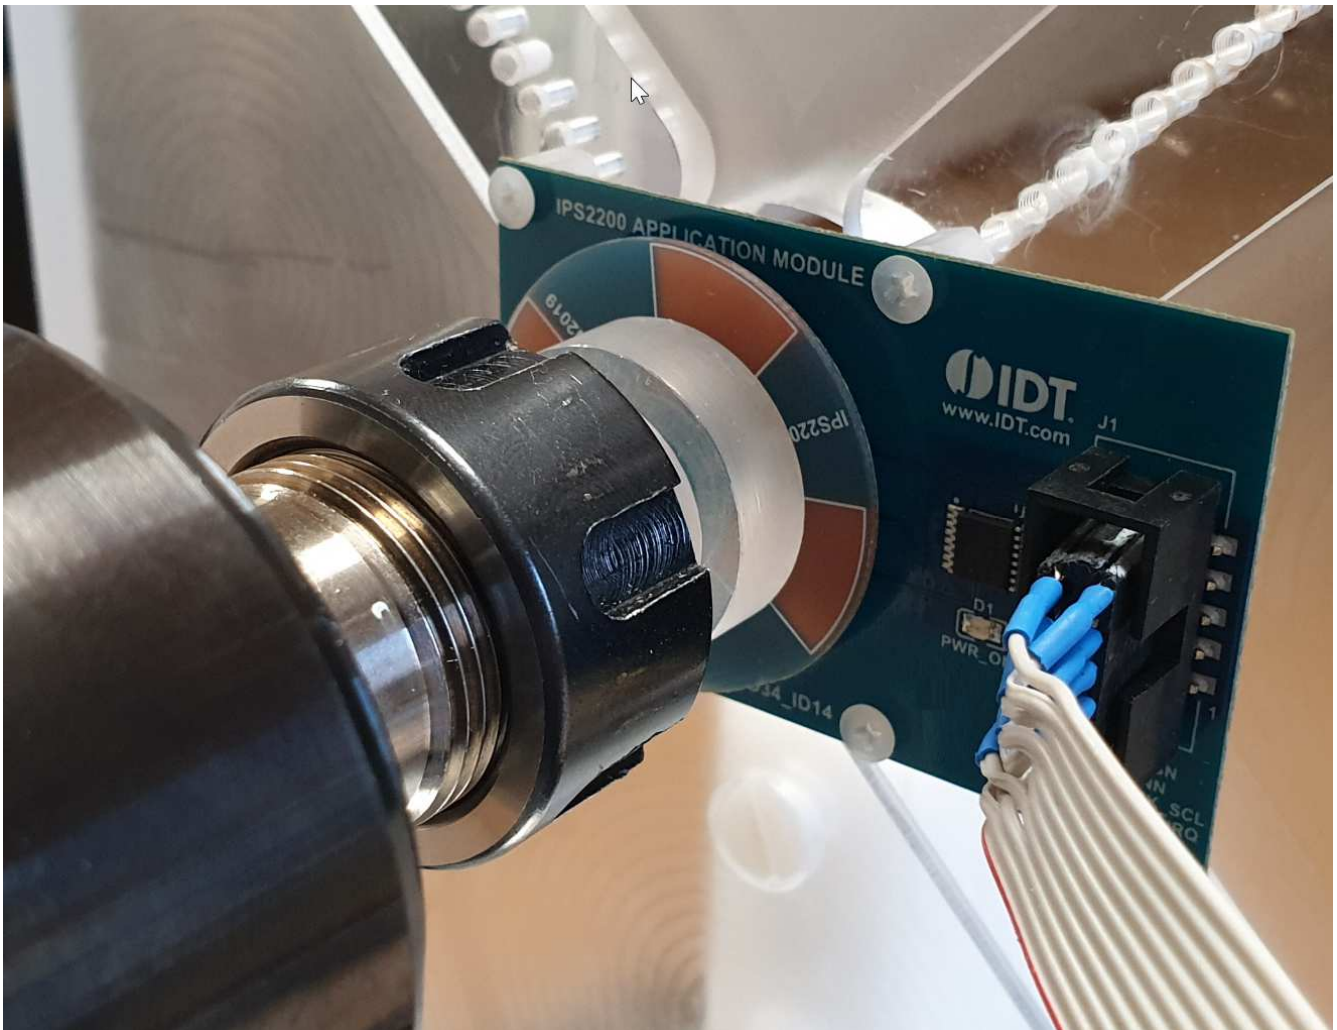


Figure 3. Setup

3. Measurement Results

3.1 Angle Error at Different Air Gaps

Figure 4. displays a series of data over a rotation of 360 degrees with a variation of air gap with no mechanical x,y displacement. Measurements are taken with the original memory settings, as shown in Table 3. No further offset cancelation and gain mismatch compensation is performed.

Example: X0.000_Y0.000_AG2.000

- Air Gap = 2.00mm
- X radial displacement = 0.00mm
- Y radial displacement = 0.00mm

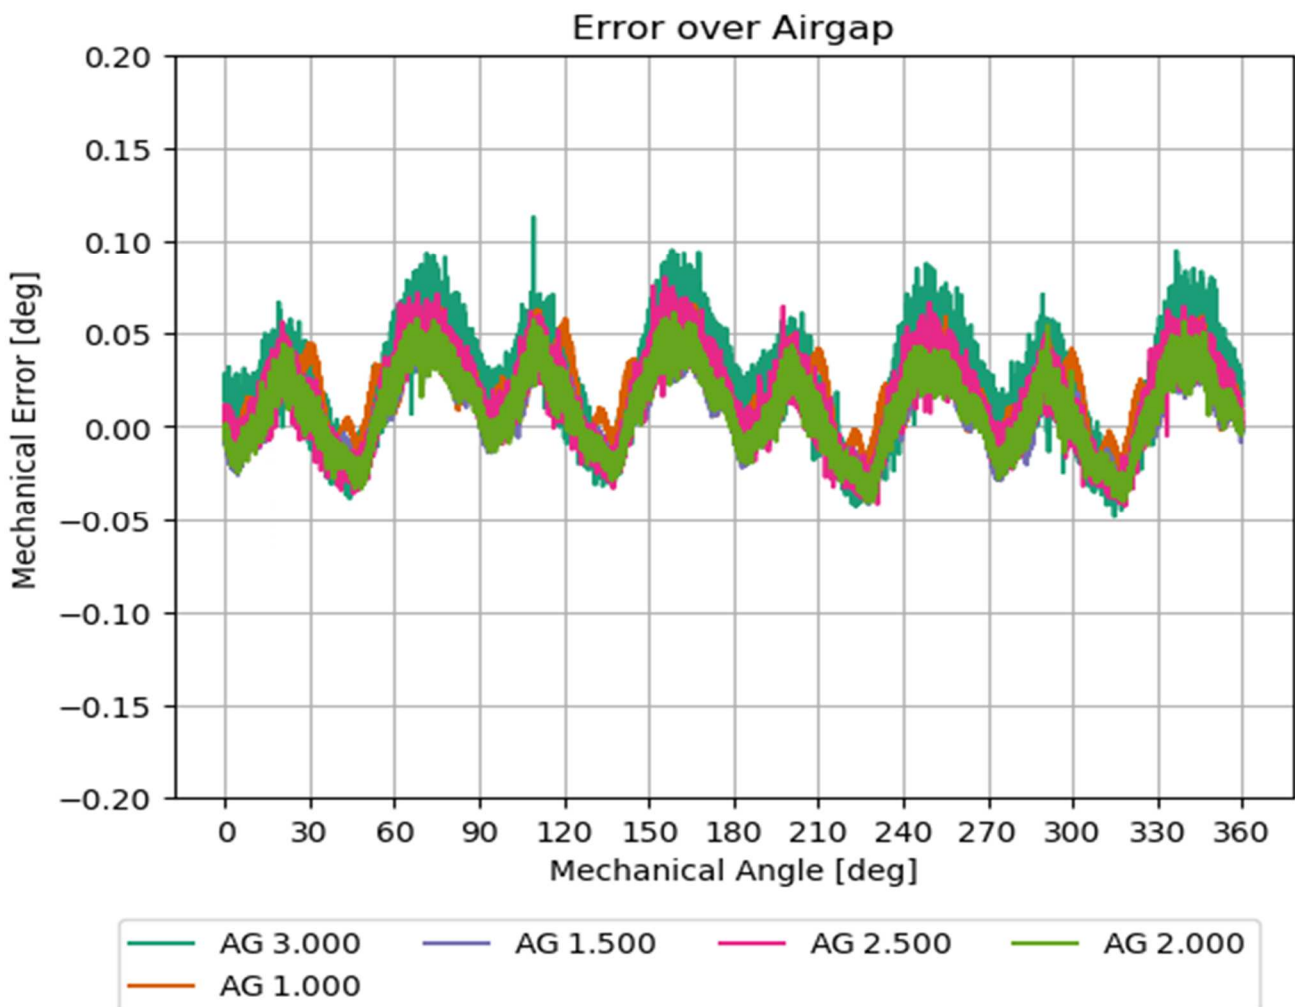


Figure 4. Error over Air Gap

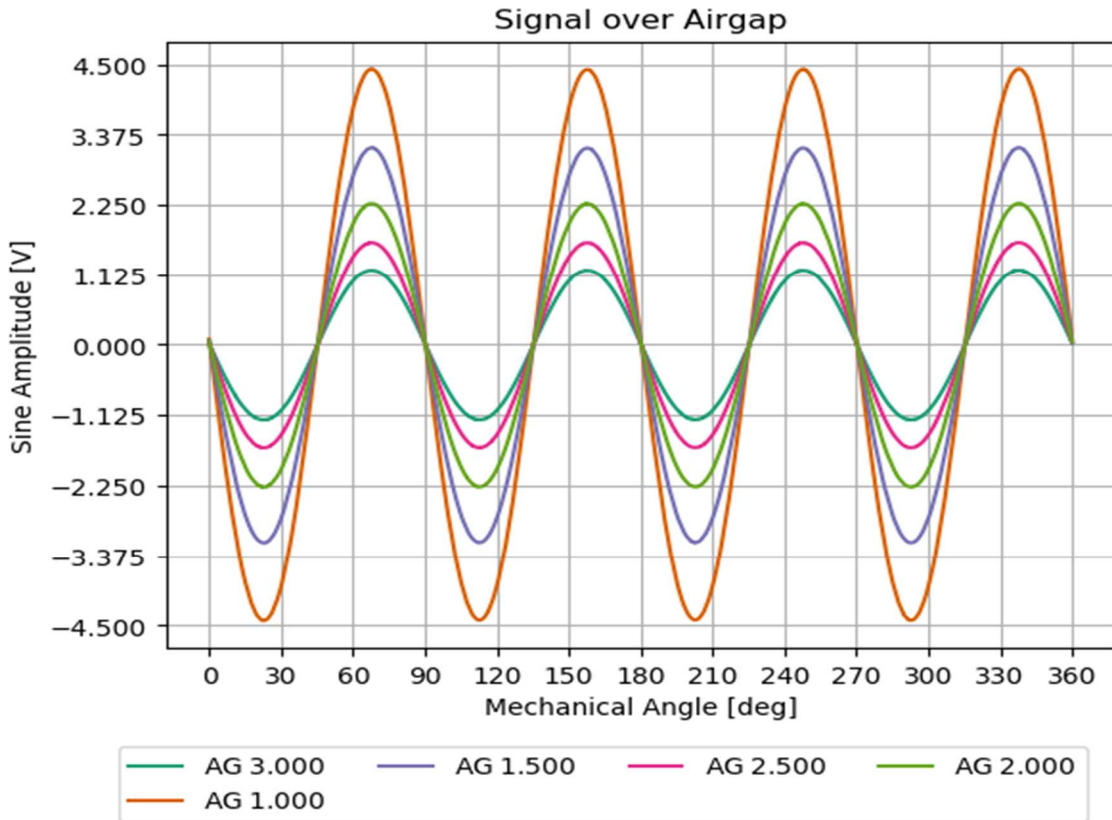


Figure 5. Sine over Air Gap

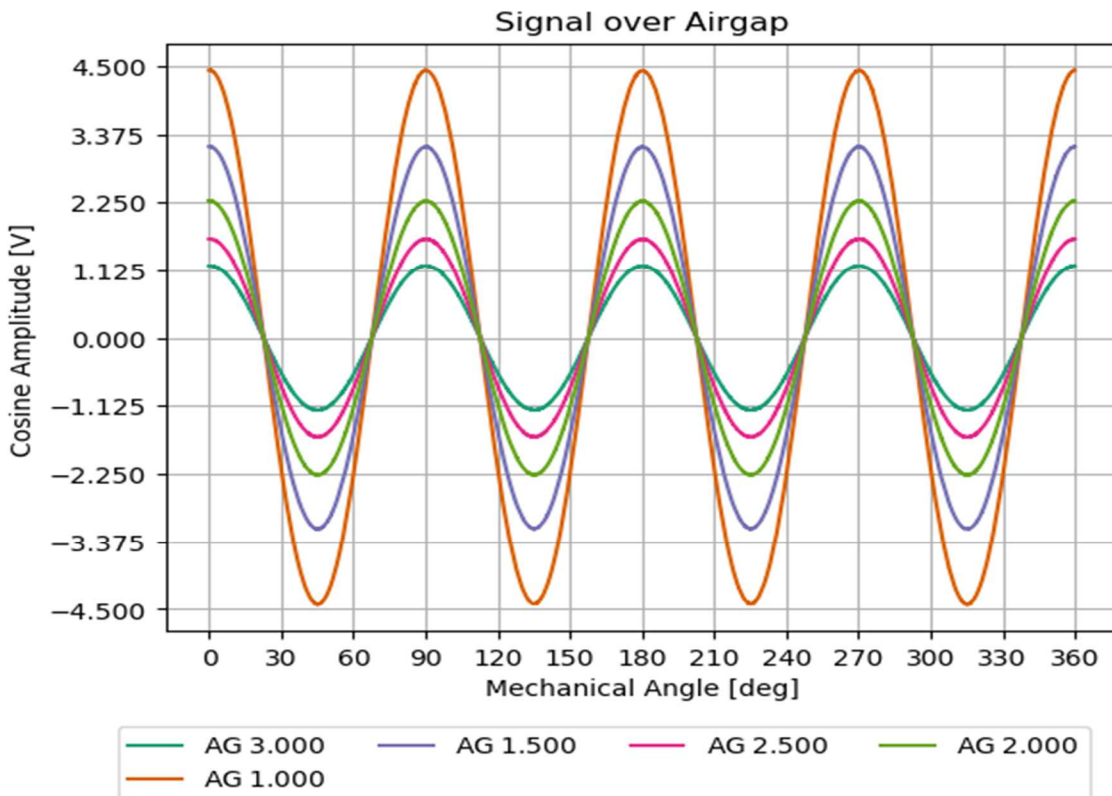


Figure 6. Cosine over Air Gap

3.2 Angle Error at Different Displacements

Figure 7. displays a series of data over a rotation of 360 degrees with no variation of air gap but with mechanical x,y displacement. Measurements are taken with the original memory settings, as shown in Table 3. No further offset cancelation and gain mismatch compensation is performed.

Example: X0.000_Y-0.250_AG2.000

- Air Gap = 2.00mm
- X radial displacement = 0.00mm
- Y radial displacement = -0.25mm

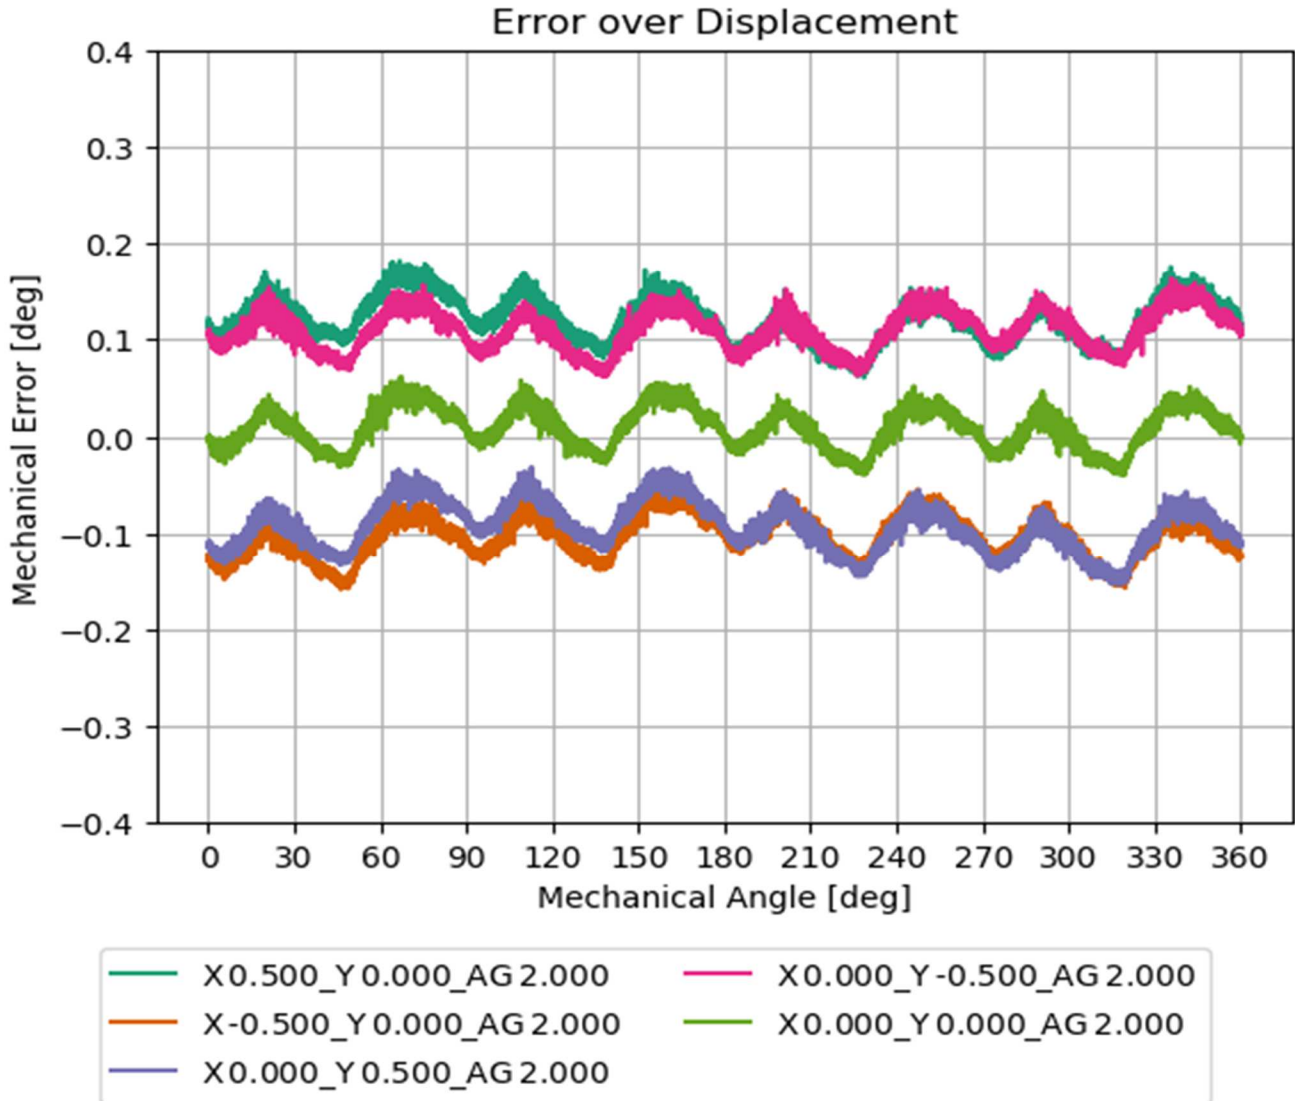


Figure 7. Error over Displacement

3.3 Angle Error at Different Tilt

Figure 8. displays a series of data over a rotation of 360 degrees with neither variation of air gap nor mechanical x,y displacement but with tilt variation. The tilt (ϕ) is given in degrees. Measurements are taken with the original memory settings, as shown in Table 3. No further offset cancelation and gain mismatch compensation is performed.

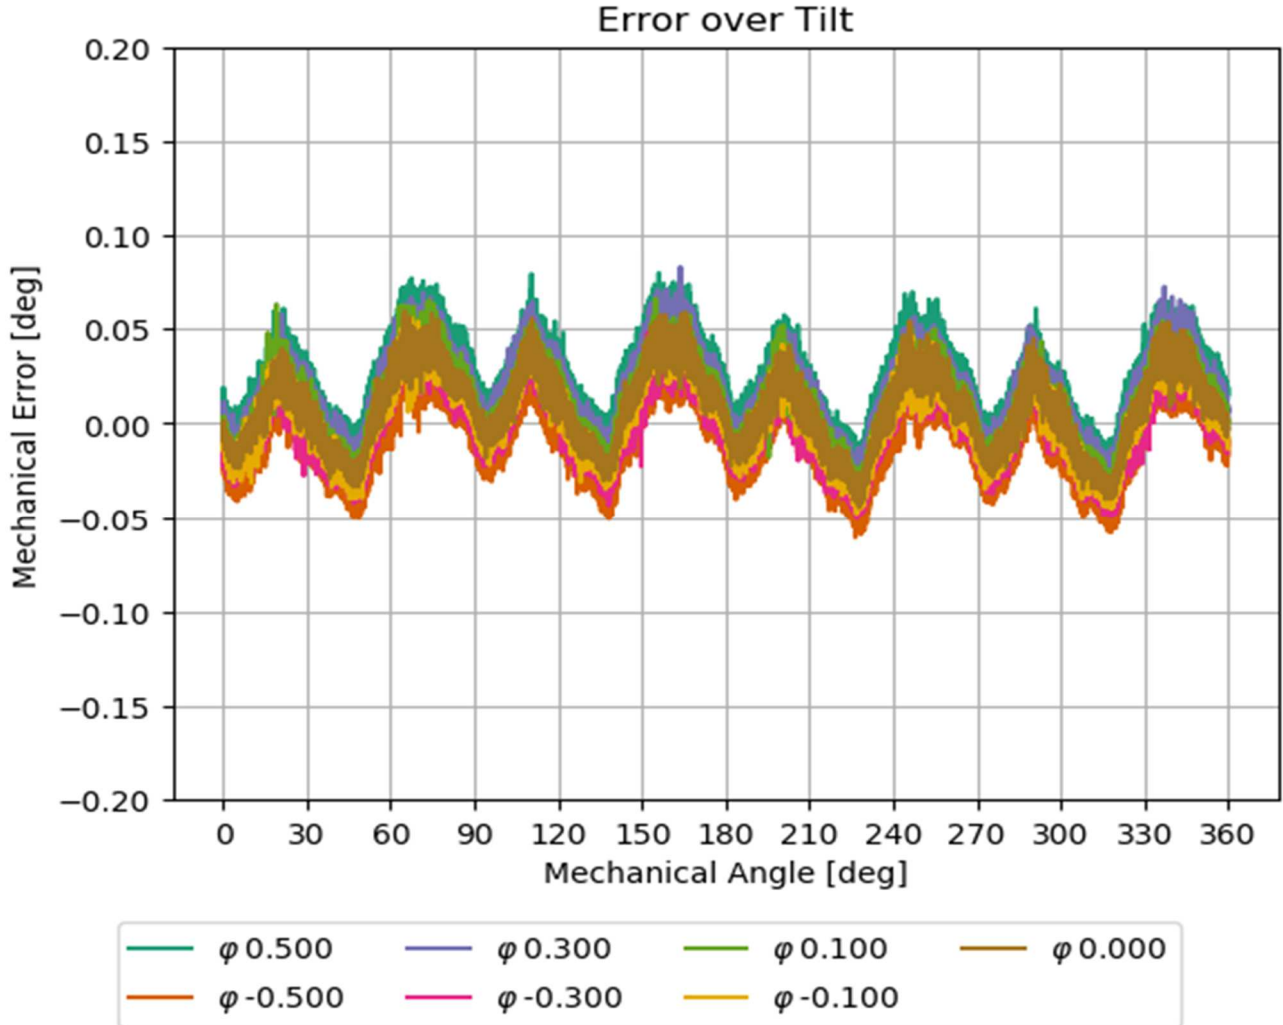


Figure 8. Error over Tilt

4. Revision History

Revision	Date	Description
	Mar. 31, 20	Initial release.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation or any other use of the circuits, software, and information in the design of your product or system. Renesas Electronics disclaims any and all liability for any losses and damages incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics hereby expressly disclaims any warranties against and liability for infringement or any other claims involving patents, copyrights, or other intellectual property rights of third parties, by or arising from the use of Renesas Electronics products or technical information described in this document, including but not limited to, the product data, drawings, charts, programs, algorithms, and application examples.
3. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You shall be responsible for determining what licenses are required from any third parties, and obtaining such licenses for the lawful import, export, manufacture, sales, utilization, distribution or other disposal of any products incorporating Renesas Electronics products, if required.
5. You shall not alter, modify, copy, or reverse engineer any Renesas Electronics product, whether in whole or in part. Renesas Electronics disclaims any and all liability for any losses or damages incurred by you or third parties arising from such alteration, modification, copying or reverse engineering.
6. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The intended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; industrial robots; etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control (traffic lights); large-scale communication equipment; key financial terminal systems; safety control equipment; etc.

Unless expressly designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not intended or authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems; surgical implantations; etc.), or may cause serious property damage (space system; undersea repeaters; nuclear power control systems; aircraft control systems; key plant systems; military equipment; etc.). Renesas Electronics disclaims any and all liability for any damages or losses incurred by you or any third parties arising from the use of any Renesas Electronics product that is inconsistent with any Renesas Electronics data sheet, user's manual or other Renesas Electronics document.

7. No semiconductor product is absolutely secure. Notwithstanding any security measures or features that may be implemented in Renesas Electronics hardware or software products, Renesas Electronics shall have absolutely no liability arising out of any vulnerability or security breach, including but not limited to any unauthorized access to or use of a Renesas Electronics product or a system that uses a Renesas Electronics product. RENESAS ELECTRONICS DOES NOT WARRANT OR GUARANTEE THAT RENESAS ELECTRONICS PRODUCTS, OR ANY SYSTEMS CREATED USING RENESAS ELECTRONICS PRODUCTS WILL BE INVULNERABLE OR FREE FROM CORRUPTION, ATTACK, VIRUSES, INTERFERENCE, HACKING, DATA LOSS OR THEFT, OR OTHER SECURITY INTRUSION ("Vulnerability Issues"). RENESAS ELECTRONICS DISCLAIMS ANY AND ALL RESPONSIBILITY OR LIABILITY ARISING FROM OR RELATED TO ANY VULNERABILITY ISSUES. FURTHERMORE, TO THE EXTENT PERMITTED BY APPLICABLE LAW, RENESAS ELECTRONICS DISCLAIMS ANY AND ALL WARRANTIES, EXPRESS OR IMPLIED, WITH RESPECT TO THIS DOCUMENT AND ANY RELATED OR ACCOMPANYING SOFTWARE OR HARDWARE, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE.
8. When using Renesas Electronics products, refer to the latest product information (data sheets, user's manuals, application notes, "General Notes for Handling and Using Semiconductor Devices" in the reliability handbook, etc.), and ensure that usage conditions are within the ranges specified by Renesas Electronics with respect to maximum ratings, operating power supply voltage range, heat dissipation characteristics, installation, etc. Renesas Electronics disclaims any and all liability for any malfunctions, failure or accident arising out of the use of Renesas Electronics products outside of such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of Renesas Electronics products, semiconductor products have specific characteristics, such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Unless designated as a high reliability product or a product for harsh environments in a Renesas Electronics data sheet or other Renesas Electronics document, Renesas Electronics products are not subject to radiation resistance design. You are responsible for implementing safety measures to guard against the possibility of bodily injury, injury or damage caused by fire, and/or danger to the public in the event of a failure or malfunction of Renesas Electronics products, such as safety design for hardware and software, including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult and impractical, you are responsible for evaluating the safety of the final products or systems manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. You are responsible for carefully and sufficiently investigating applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive, and using Renesas Electronics products in compliance with all these applicable laws and regulations. Renesas Electronics disclaims any and all liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. Renesas Electronics products and technologies shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You shall comply with any applicable export control laws and regulations promulgated and administered by the governments of any countries asserting jurisdiction over the parties or transactions.
12. It is the responsibility of the buyer or distributor of Renesas Electronics products, or any other party who distributes, disposes of, or otherwise sells or transfers the product to a third party, to notify such third party in advance of the contents and conditions set forth in this document.
13. This document shall not be reprinted, reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
14. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products.

(Note1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its directly or indirectly controlled subsidiaries.

(Note2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

(Disclaimer Rev.5.0-1 October 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/