

## DA7212

### Stereo CODEC with enhanced automatic level controller and 1.2W speaker driver

**DA7212 is a high performance, low-power audio codec with an enhanced hybrid ALC and a powerful speaker driver targeting portable and embedded applications.**

**A key benefit of the DA7212 is that it operates from a single supply and has an internal LDO that can be used to optimise power consumption.**

The audio front-end simultaneously supports stereo auxiliary line inputs plus analogue and digital microphones with two independent microphone biases. These inputs can be mixed into the input and/or output mixer paths.

The audio/voice capture path also integrates an enhanced ALC and noise gate function to ensure the dynamic range of the stereo ADCs is maximised. Comprehensive analogue mixing and bypass paths to the output drivers are available.

The playback path delivers 98dB into 16 $\Omega$  stereo headphones whilst only consuming 6.9mW (under JEITA conditions). The headphone driver is true-ground with built-in charge pump. A dedicated mono speaker channel is available that can deliver 1.2W into 8 $\Omega$  mini-speaker when supplied from 5.0V.

All High pass channel filtering is performed digitally. Other digital functions include programmable 5-band EQ, beep generator and wind noise filter.

The codec supports both master and slave mode operation using the internal PLL which may be bypassed if not required. The low power fractional PLL has been optimised to support a wide range of sample and reference clock frequencies. Internal suppression circuits help maintain audio synchronisation in the presence of system noise on the external clock.

Digital audio transfer to and from the external processor is available via bidirectional I2S interface which supports all common sample rates.



34 ball WL\_CSP Package, 0.5mm pitch

## Features


- ▶ High performance 24-bit audio codec in 7.5mm<sup>2</sup> footprint
- ▶ Ultra low power consumption. Stereo Playback: 6 .9mW, Stereo Record: 2.0mW @1.8V
- ▶ Supports upto four analogue microphones with two switchable low noise microphone bias outputs
- ▶ Digital microphone interface supporting single channel or dual channel options
- ▶ Stereo auxiliary input channel
- ▶ Flexible analogue and digital mixing paths
- ▶ DSP for ALC, 5-band EQ, noise gate, beep generator
- ▶ System controller for pop/click free operation and easy setup
- ▶ Bidirectional I2S with sample-rate tracking
- ▶ Mono lineout/mini Speaker driver: 400mW into 8Ω @ 3.0 V with pop/click suppression
  - 65mW @ 1.2V, THD < 1%, R = 8Ω
  - 80mW @ 1.5V, THD < 1%, R = 8Ω
  - 350mW @ 3.0V, THD < 1%, R = 8Ω
  - 1.2W @ 5.0V, THD < 10%, R = 8Ω
- ▶ Integrated PLL supports common audio sample rates between 8-96kHz from 2-54MHz reference clock
- ▶ Wide supply range (1.7V to 2.5V)

## Applications

- ▶ Personal Media Players
- ▶ Audio headphone/headsets
- ▶ Wearables
- ▶ Embedded applications
- ▶ Arduino compatible development systems



## ALC & Noise Gate Timing

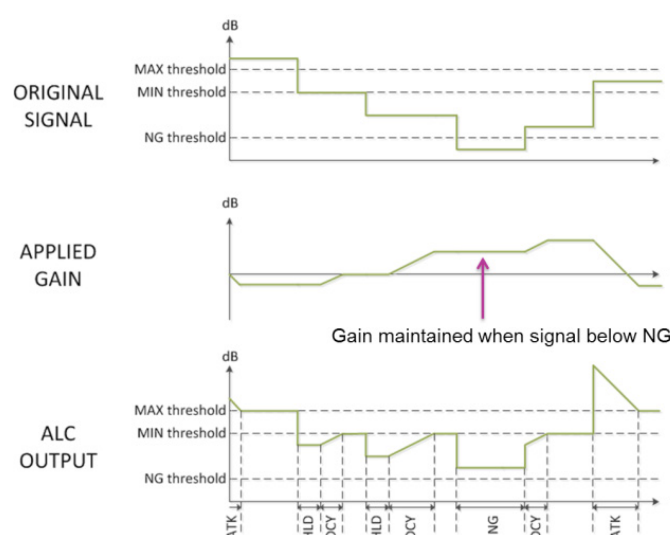


### Features highlights

- ▶ Stereo Playback/Record: 6.9mW & 2.0mW @ 1.8V
- ▶ Hybrid Digital/Analogue ALC offering faster reaction times and finer gain resolution
- ▶ Built-in beep generator that outputs all DTMF keypad tones
- ▶ 5-band EQ

### Board Area highlights

- ▶ 7.5mm<sup>2</sup> package footprint enabling PCB space savings in area constrained applications
- ▶ Capless headphone driver eliminates large AC coupling capacitors
- ▶ Optimised ball-out conducive for low cost PCB manufacturing

### Block Diagram

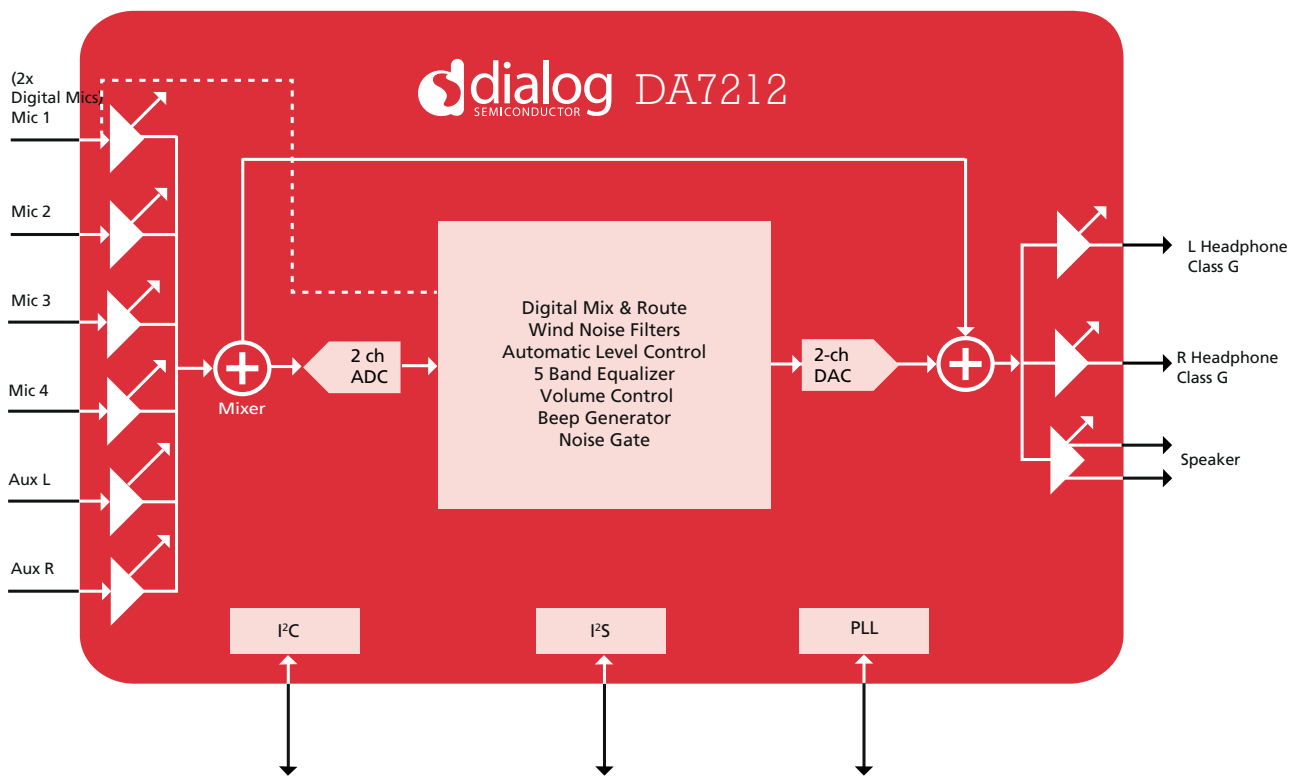

### Dialog Semiconductor Worldwide Sales Offices - [www.dialog-semiconductor.com](http://www.dialog-semiconductor.com)

email: [info@diasemi.com](mailto:info@diasemi.com)

United Kingdom  
Phone: +44 1793 757700

The Netherlands  
Phone: +31 73 640 88 22

Japan  
Phone: +81 3 5425 4567

Singapore  
Phone: +65 648 499 29

Korea  
Phone: +82 2 3469 8200

Germany  
Phone: +49 7021 805-0

North America  
Phone: +1 408 845 8500

Taiwan  
Phone: +886 281 786 222

Hong Kong  
Phone: +852 3769 5200

China (Shenzhen)  
Phone: +86 755 2981 3669  
China (Shanghai)  
Phone: +86 21 5424 9058

This publication provides outline information only, which unless agreed by Dialog Semiconductor may not be used, applied or reproduced for any purpose, or be regarded as a representation relating to products. Please refer to Dialog standard supply terms on the company website ([www.dialog-semiconductor.com](http://www.dialog-semiconductor.com)).

© Dialog Semiconductor 2015. All rights reserved. 0415XXX