

RX Family

R20AN0104EJ0206

Rev.2.06

Apr 01, 2016

JPEG Decoder Module

Firmware Integration Technology

Introduction

This material explains usage of JPEG Decoder (JPEGD).

JPEG Decoder is only for decoding, and there are the following two libraries.

JPEG Decode Library: Inverse DCT, Inverse Quantization and Huffman decoding.

JPEG File Expand Library: Expand JPEG data using JPEG Decode Library.

The source code of JPEG File Expand Library is attached so that a user can change specification.

JPEGD is provided as Firmware Integration Technology (FIT) Module. Please refer to the URL to know FIT outline.

<http://www.renesas.com/products/mpumcu/rx/child/fit.jsp>

Target Device

RX Family

Contents

1. Structure of product.....	3
2. Specification of library.....	4
2.1 Structure of software stack.....	4
2.2 Specification of JPEG File Expand Library	4
2.3 Development environment	5
2.4 Specification of API	5
2.5 ROM size / RAM size / Stack size.....	6
2.6 Version information	8
2.6.1 RX600 (little endian).....	8
2.6.2 RX600 (big endian).....	8
2.6.3 RX200 (little endian).....	9
2.6.4 RX200 (big endian).....	9
3. Usage of Libraries	10
3.1 Usage of JPEG File Expand library	10
3.2 Usage of JPEG Decode Library	10
4. Notes	11
5. Software Update Information.....	12

1. Structure of product

Package name : JPEG Decoder for the RX Family V.2.06 Release 00

Table 1.1 Product Files of JPEG Decoder

File/Directory name	description
JPEGD FIT Module (r_jpegd_rx_v.2.06.zip)	
JPEGD config (r_config)	
r_jpegd_rx_config.h	JPEGD Config file (default setting)
JPEGD FIT Module body (r_jpegd_rx)	
JPEGD document (doc)	
Japanese (ja)	
r20an0104jj0206_rx_jpegd.pdf	Introduction Guide
r20uw0075jj0103_jpegd.pdf	User's Manual
English (en)	
r20an0104ej0206_rx_jpegd.pdf	Introduction Guide (this document)
r20uw0075ej0103_jpegd.pdf	User's Manual
JPEGD Library (lib)	
jpegd_rx600_little.lib jpegd_rx600_big.lib jpegd_rx200_little.lib jpegd_rx200_big.lib r_jpegd.h	JPEG Decode Library and header file
expand_jpegd_rx600_little.lib expand_jpegd_rx600_big.lib expand_jpegd_rx200_little.lib expand_jpegd_rx200_big.lib r_expand_jpegd.h	JPEG File Expand Library and header file
r_stdint.h	Data type header file
r_mw_version.h	Version data header file
JPEG File Expand Library make environment (make_lib)	
make_lib.zip	JPEG File Expand Library make environment (includes source code)
JPEGD config reference (ref)	
r_jpegd_rx_config_reference.h	JPEGD config file (template)
readme(readme.txt)	readme

2. Specification of library

2.1 Structure of software stack

This figure explains structure of software stack of JPEG Decoder.

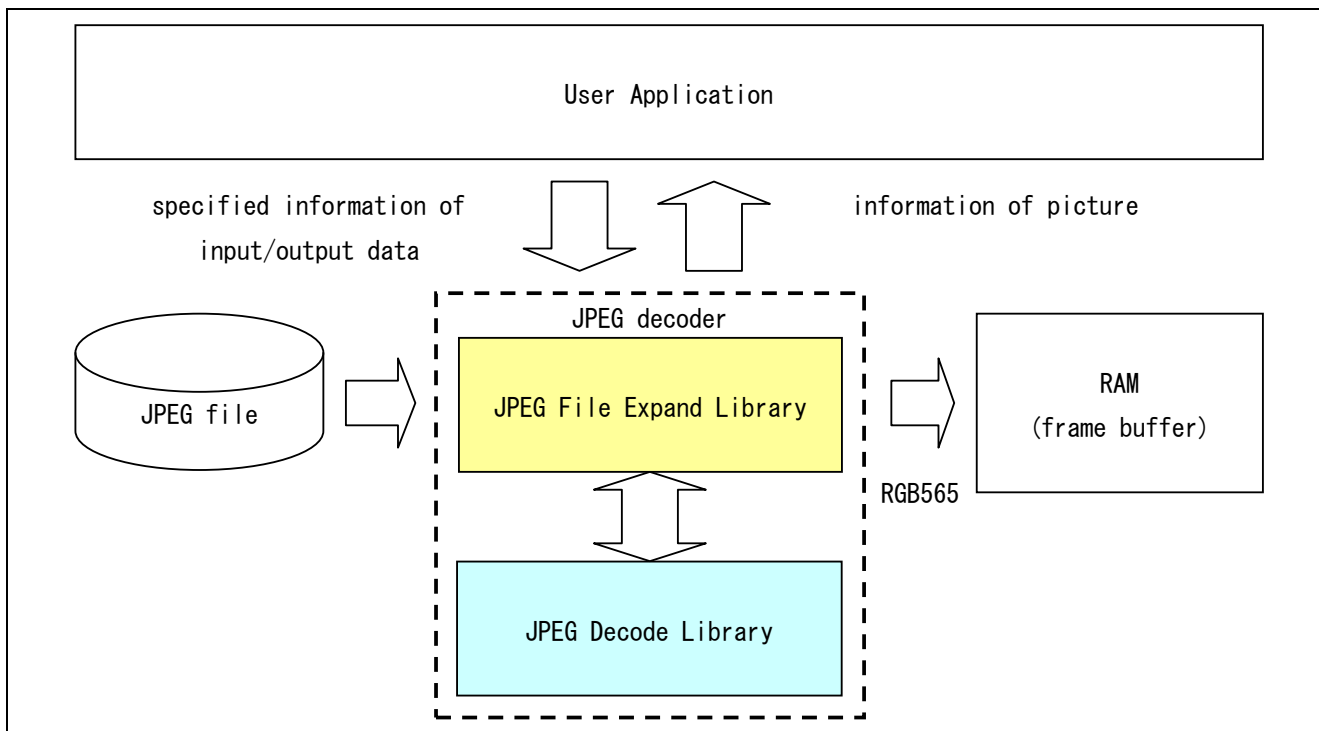


Figure 2.1 Structure of Software Stack

2.2 Specification of JPEG File Expand Library

Specification of this JPEG File Expand Library is below.

Table 2.1 specification of JPEG Expand Library

Items	Specifications
Elements of color	3 colors (YCbCr)
Ratio of sample	4:4:4 (1x1,1x1,1x1) 4:2:2 (2x1,1x1,1x1) 4:2:2 vertical (1x2,1x1,1x1) 4:2:0 (2x2,1x1,1x1)
Output format	RGB565 (16bit color)
Input data	All data has to be prepared.
Clipping of expansion	No support
Progressive	No support
Exif	No support

2.3 Development environment

JPEG Decoder can run with this development environment below.

[IDE]

CS+ V3.03.00

e²studio V4.2.0.012

[C compiler]

C/C++ Compiler Package for RX Family V.1.02 Release 01

Library file is built with default compile option.

- compile option (RX600 little endian)
-cpu=rx600 -output=obj="\$(CONFIGDIR)\\$(FILELEAF).obj" -nologo
- compile option (RX600 big endian)
Adding “-endian=big” to default option.
- compile option (RX200 little endian)
-cpu=rx200 -output=obj="\$(CONFIGDIR)\\$(FILELEAF).obj" -nologo
- compile option (RX200 big endian)
Adding “-endian=big” to default option.

2.4 Specification of API

Specification of JPEG Expand Library APIs are below.

Table 2.2 API (JPEG File Expand Library)

function name	outline
R_init_jpeg	initialize library
R_expand_jpeg	process JPEG expansion
R_get_info_jpeg	get information of JPEG

Note: Refer to the JPEG Expand Library User's Manual to know details.

Specification of JPEG Decode Library APIs are below.

Table 2.3 API (JPEG Decode Library)

function name	outline
R_jpeg_make_huff_table	register table for Huffman encoding
R_jpeg_add_iquant_table	register table for quantization
R_jpeg_decode_one_block	execute Huffman encoding
R_jpeg_IDCT	execute Reverse quantization and Reverse DCT
R_jpeg_readRST	detect number of re-initialized decode

Note: Refer to the JPEG Decode Library User's Manual to know details.

2.5 ROM size / RAM size / Stack size

JPEG Decoder requires ROM/RAM/Stack size as below.

Table 2.4 ROM/RAM size (JPEG File Expand Library)

kind	section name	Attribute, Alignment	size [byte]	
			RX600, RX200 little endian	RX600, RX200 big endian
ROM	P_jpeg_exp_F (*)	code	4040	4040
	P_jpeg_exp_S	code	3327	3330
	C_jpeg_exp_F (*)	data, align=4	8	8
	C_jpeg_exp_S	data, align=4	644	644
Total	-	-	8019	8022
RAM	B_jpeg_exp_F (*)	data, align=4	5424	5424
	B_jpeg_exp_F_2 (*)	data, align=2	6	6
	B_jpeg_exp_S	data, align=4	72	72
	B_jpeg_exp_S_2	data, align=2	4	4
Total	-	-	5506	5506

Note: (*): Recommends arranging to a high speed memory.

Table 2.5 ROM/RAM size (JPEG Decode Library)

Kind	section name	Attribute, Alignment	size [byte]	
			RX600, RX200 little endian	RX600, RX200 big endian
ROM	P_jpeg_dec_F8 (*)	code, align=8	2982	2981
	P_jpeg_dec_S	code	48	48
	C_jpeg_dec_F (*)	data, align=4	4	4
	C_jpeg_dec_F_2 (*)	data, align=2	1284	1284
	C_jpeg_dec_S	data, align=4	132	132
Total	-	-	4384	4385
RAM	-	-	0	0
Total	-	-	0	0

Note: (*): Recommends arranging to a high speed memory.

Table 2.6 Stack size (JPEG File Expand Library)

API function name	stack size [byte]	
	RX600, RX200 little endian	RX600, RX200 big endian
R_init_jpeg	4	4
R_expand_jpeg	228	228
R_get_info_jpeg	56	56

Table 2.7 Stack size (JPEG Decode Library)

API function name	stack size [byte]	
	RX600, RX200 little endian	RX600, RX200 big endian
R_jpeg_make_huff_table	52	52
R_jpeg_add_iquant_table	8	8
R_jpeg_decode_one_block	64	64
R_jpeg_IDCT	64	64
R_jpeg_readRST	16	16

2.6 Version information

Version information is stored in this library. Version information can be accessed if the header of this library is included. The data stored in this library is as follows.

2.6.1 RX600 (little endian)

JPEG File Expand Library (expand_jpegd_rx600_little.lib)

```
#include "r_expand_jpegd.h"
```

Version information of a Library

```
R_expand_jpegd_version.library[] =  
"JPEG File Expand Library version 1.03 for the RX600 LITTLE endian.(Apr 11 2013, 16:18:02)"
```

Version information of a compiler

```
R_expand_jpegd_version.complier = 0x01020100
```

JPEG Decode Library (jpegd_rx600_little.lib)

```
#include "r_jpegd.h"
```

Version information of a Library

```
R_jpegd_version.library[] =  
"JPEG Decode Library version 2.06 for the RX600 LITTLE endian.(Feb 18 2016, 17:15:41)"
```

Version information of a compiler

```
R_jpegd_version.complier = 0x01020100
```

2.6.2 RX600 (big endian)

JPEG File Expand Library (expand_jpegd_rx600_big.lib)

```
#include "r_expand_jpegd.h"
```

Version information of a Library

```
R_expand_jpegd_version.library[] =  
"JPEG File Expand Library version 1.03 for the RX600 BIG endian.(Apr 11 2013, 16:17:58)"
```

Version information of a compiler

```
R_expand_jpegd_version.complier = 0x01020100
```

JPEG Decode Library (jpegd_rx600_big.lib)

```
#include "r_jpegd.h"
```

Version information of a Library

```
R_jpegd_version.library[] =  
"JPEG Decode Library version 2.06 for the RX600 BIG endian.(Feb 18 2016, 17:15:52)"
```

Version information of a compiler

```
R_jpegd_version.complier = 0x01020100
```


2.6.3 RX200 (little endian)

JPEG File Expand Library (expand_jpegd_rx200_little.lib)

```
#include "r_expand_jpegd.h"
```

Version information of a Library

```
R_expand_jpegd_version.library[] =  
"JPEG File Expand Library version 1.03 for the RX200 LITTLE endian.(Apr 11 2013, 16:17:55)"
```

Version information of a compiler

```
R_expand_jpegd_version.complier = 0x01020100
```

JPEG Decode Library (jpegd_rx200_little.lib)

```
#include "r_jpegd.h"
```

Version information of a Library

```
R_jpegd_version.library[] =  
"JPEG Decode Library version 2.06 for the RX200 LITTLE endian.(Feb 18 2016, 17:15:58)"
```

Version information of a compiler

```
R_jpegd_version.complier = 0x01020100
```

2.6.4 RX200 (big endian)

JPEG File Expand Library (expand_jpegd_rx200_big.lib)

```
#include "r_expand_jpegd.h"
```

Version information of a Library

```
R_expand_jpegd_version.library[] =  
"JPEG File Expand Library version 1.03 for the RX200 BIG endian.(Apr 11 2013, 16:17:51)"
```

Version information of a compiler

```
R_expand_jpegd_version.complier = 0x01020100
```

JPEG Decode Library (jpegd_rx200_big.lib)

```
#include "r_jpegd.h"
```

Version information of a Library

```
R_jpegd_version.library[] =  
"JPEG Decode Library version 2.06 for the RX200 BIG endian.(Feb 18 2016, 17:16:06)"
```

Version information of a compiler

```
R_jpegd_version.complier = 0x01020100
```

3. Usage of Libraries

3.1 Usage of JPEG File Expand library

Please link the library file to user application.

RX600 little endian: jpegd_rx600_little.lib, expand_jpegd_rx600_little.lib

RX600 big endian: jpegd_rx600_big.lib, expand_jpegd_rx600_big.lib

RX200 little endian: jpegd_rx200_little.lib, expand_jpegd_rx200_little.lib

RX200 big endian: jpegd_rx200_big.lib, expand_jpegd_rx200_big.lib

Please include the header files with library.

```
#include "r_expand_jpegd.h"
```

3.2 Usage of JPEG Decode Library

Please link the library file to user application.

RX600 little endian: jpegd_rx600_little.lib

RX600 big endian: jpegd_rx600_big.lib

RX200 little endian: jpegd_rx200_little.lib

RX200 big endian: jpegd_rx200_big.lib

Please include the header files with library.

```
#include "r_jpegd.h"
```

4. Notes

- This library uses DSP instructions. Please push/pop accumulator register (ACC) in user interrupts function using accumulator, because DSP instructions uses accumulator (RX600).
- This library can be used with Microcontroller Options fint_register=0 (Fast interrupt vectorregister [None]). The default for this option is fint_register=0.
- This library is using Application Notes "Color Space Conversion Using the DSP Instructions" [R01AN0225EJ0100]. Refer to it to know details.

5. Software Update Information

Package version	Date	Description
V.2.01 Release 00	Jun 17, 2011	first release
V.2.03 Release 00	Oct 15, 2012	Support RX200 For RX600, Use DSP instructions for color space conversion. Correct decode function (big endian).
V.2.04 Release 00	Jun 28, 2013	Update error check function for JPEG file analysis. Improve the processing speed of JPEG decode library.
V.2.05 Release 00	Mar 17, 2015	Support FIT.
V.2.06 Release 00	Apr 01, 2016	Updated version number with the xml file revision.

Website and Support

Renesas Electronics Website

<http://www.renesas.com/>

Inquiries

<http://www.renesas.com/contact/>

All trademarks and registered trademarks are the property of their respective owners.

Revision History

Rev.	Date	Description	
		Page	Summary
1.00	Jun.06.2011	—	First edition issued
1.01	May.18.2012	—	Support RX200
1.02	Oct.16.2012	—	Update Library Infomation. Clerical error correction.
1.03	Apr.26.2013	—	Update section name. Update format of version information.
2.05	Mar.17.2015	—	Support FIT.
2.06	Apr.01.2016	—	Update the xml file for FIT

General Precautions in the Handling of Microprocessing Unit and Microcontroller Unit Products

The following usage notes are applicable to all Microprocessing unit and Microcontroller unit products from Renesas. For detailed usage notes on the products covered by this document, refer to the relevant sections of the document as well as any technical updates that have been issued for the products.

1. Handling of Unused Pins

Handle unused pins in accordance with the directions given under Handling of Unused Pins in the manual.

- The input pins of CMOS products are generally in the high-impedance state. In operation with an unused pin in the open-circuit state, extra electromagnetic noise is induced in the vicinity of LSI, an associated shoot-through current flows internally, and malfunctions occur due to the false recognition of the pin state as an input signal become possible. Unused pins should be handled as described under Handling of Unused Pins in the manual.

2. Processing at Power-on

The state of the product is undefined at the moment when power is supplied.

- The states of internal circuits in the LSI are indeterminate and the states of register settings and pins are undefined at the moment when power is supplied.
In a finished product where the reset signal is applied to the external reset pin, the states of pins are not guaranteed from the moment when power is supplied until the reset process is completed.
In a similar way, the states of pins in a product that is reset by an on-chip power-on reset function are not guaranteed from the moment when power is supplied until the power reaches the level at which resetting has been specified.

3. Prohibition of Access to Reserved Addresses

Access to reserved addresses is prohibited.

- The reserved addresses are provided for the possible future expansion of functions. Do not access these addresses; the correct operation of LSI is not guaranteed if they are accessed.

4. Clock Signals

After applying a reset, only release the reset line after the operating clock signal has become stable. When switching the clock signal during program execution, wait until the target clock signal has stabilized.

- When the clock signal is generated with an external resonator (or from an external oscillator) during a reset, ensure that the reset line is only released after full stabilization of the clock signal. Moreover, when switching to a clock signal produced with an external resonator (or by an external oscillator) while program execution is in progress, wait until the target clock signal is stable.

5. Differences between Products

Before changing from one product to another, i.e. to a product with a different part number, confirm that the change will not lead to problems.

- The characteristics of Microprocessing unit or Microcontroller unit products in the same group but having a different part number may differ in terms of the internal memory capacity, layout pattern, and other factors, which can affect the ranges of electrical characteristics, such as characteristic values, operating margins, immunity to noise, and amount of radiated noise. When changing to a product with a different part number, implement a system-evaluation test for the given product.

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.
"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.
"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.
Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.



SALES OFFICES

Renesas Electronics Corporation

<http://www.renesas.com>

Refer to "<http://www.renesas.com>" for the latest and detailed information.

Renesas Electronics America Inc.

2801 Scott Boulevard Santa Clara, CA 95050-2549, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited

9251 Yonge Street, Suite 8309 Richmond Hill, Ontario Canada L4C 9T3
Tel: +1-905-237-2004

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-6503-0, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

Room 1709, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100191, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 301, Tower A, Central Towers, 555 Langao Road, Putuo District, Shanghai, P. R. China 200333
Tel: +86-21-2226-0888, Fax: +86-21-2226-0999

Renesas Electronics Hong Kong Limited

Unit 1601-1611, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2265-6688, Fax: +852 2886-9022

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei 10543, Taiwan
Tel: +886-2-8175-9600, Fax: +886-2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre, Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 1207, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics India Pvt. Ltd.

No.777C, 100 Feet Road, HALII Stage, Indiranagar, Bangalore, India
Tel: +91-80-67208700, Fax: +91-80-67208777

Renesas Electronics Korea Co., Ltd.

12F., 234 Teheran-ro, Gangnam-Gu, Seoul, 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141