
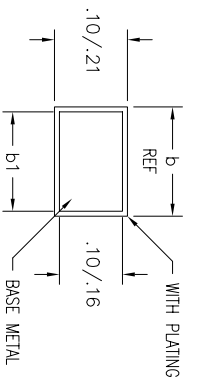
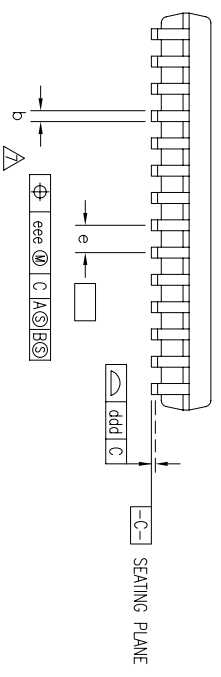
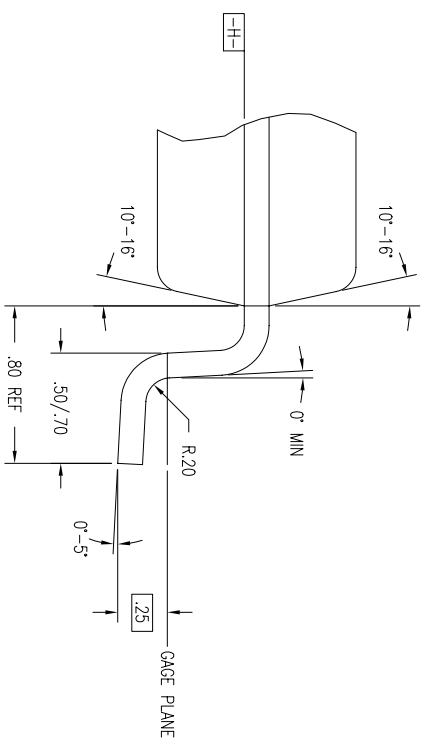


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
01	REDRAW TO ANSI Y14.5M-1982	03/15/95	T. VU
02	ADD 32 LD	06/25/97	TU VU
03	ADD "GREEN" PZG NOMENCLATURE	10/13/04	TU VU
04	ADDED PACKAGE CODE	12/12/12	RC

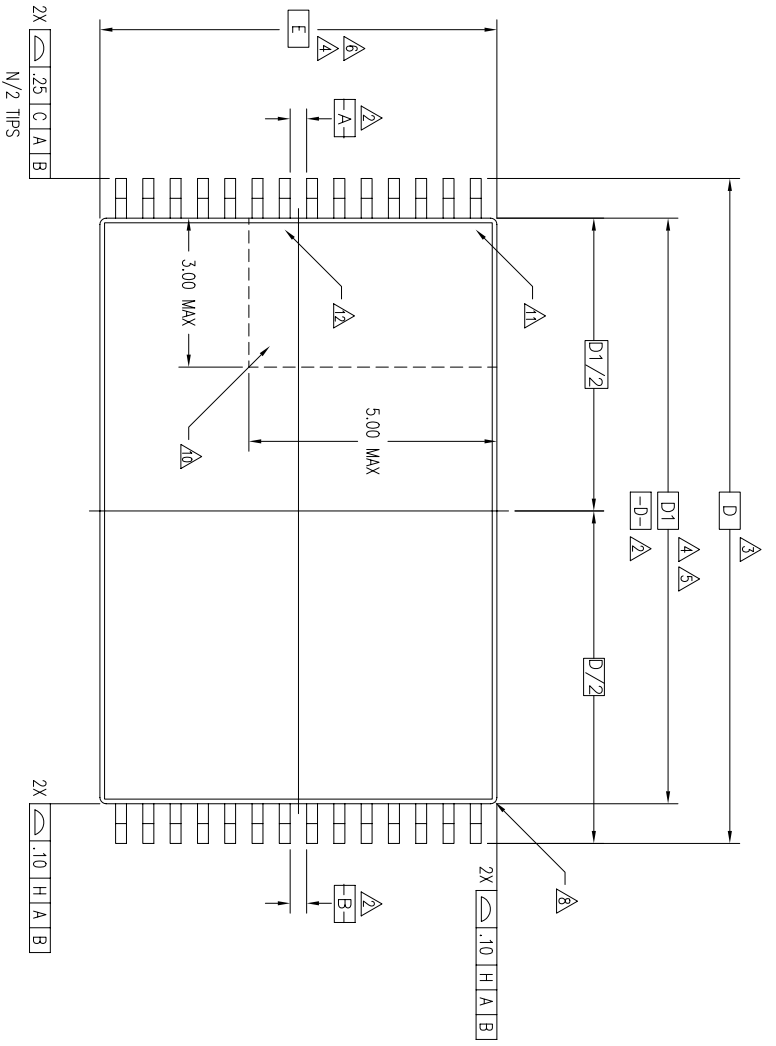

SECTION A-A

TOLERANCES UNLESS SPECIFIED		TITLE	
DECIMAL	ANGULAR	PZ/PZG PACKAGE OUTLINE	
±	±	8.0 X 13.4 X 1.0 mm TSOP TYPE I	
APPROVALS	DATE	SIZE	DRAWING No.
DRAWN		C	PSC-4044
CHECKED			
		DO NOT SCALE DRAWING	SHEET 1 OF 2

6024 SILVERCREEK VALLEY RD  
 SAN JOSE CA 95138  
 PHONE: (408) 284-8200  
 FAX: (408) 284-8591


REV	DESCRIPTION	DATE	APPROVED
01	REDRAW TO ANSI Y14.5M-1982	03/15/95	T. VU
02	ADD 32 LD	06/25/97	T. VU
03	ADD "GREEN" PZG NOMENCLATURE	10/13/04	T. VU
04	ADDED PACKAGE CODE	12/12/12	RC

### LAND PATTERN DIMENSIONS

SYMBOL	PZ/PZG28		PZ/PZG32	
	JEDEC VARIATION	NOT REGISTERED	JEDEC VARIATION	NOT REGISTERED
A	MIN	MAX	MIN	MAX
A1	-.05	-.15	-.05	-.15
A2	.90	1.00, 1.05	.90	1.00, 1.05
D	13.40 BSC	3	13.40 BSC	3
D1	11.80 BSC	4.5	11.80 BSC	4.5
E	8.00 BSC	4.6	8.00 BSC	4.6
N	28	32	32	
e	.55 BSC		.50 BSC	
b	.17	.22	.17	.22
b1	.17	.20	.17	.20
ddd	-.10	-.10	-.10	-.10
eee	-.08	-.08	-.08	-.08

### NOTES:

- ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
- DATUMS **-A-**, **-B-** AND **-D-** TO BE DETERMINED AT DATUM PLANE **-H-**
- DIMENSION D TO BE DETERMINED AT SEATING PLANE **-C-**
- DIMENSIONS D1 AND E ARE TO BE DETERMINED AT DATUM PLANE **-H-**
- DIMENSION D1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED .25 mm PER SIDE
- DIMENSION E DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED .15 mm PER SIDE
- LEAD WIDTH DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION IS .08 mm IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT
- EXACT SHAPE OF EACH CORNER IS OPTIONAL
- THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .10 AND .25 mm FROM THE LEAD TIP
- DETAILS OF MECHANICAL PIN 1 IDENTIFIER IS OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED
- ELECTRICAL PIN 1 IDENTIFIER FOR 32 LEAD PACKAGE
- ELECTRICAL PIN 1 IDENTIFIER FOR 28 LEAD PACKAGE
- ALL DIMENSIONS ARE IN MILLIMETERS
- THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-183, VARIATION AA

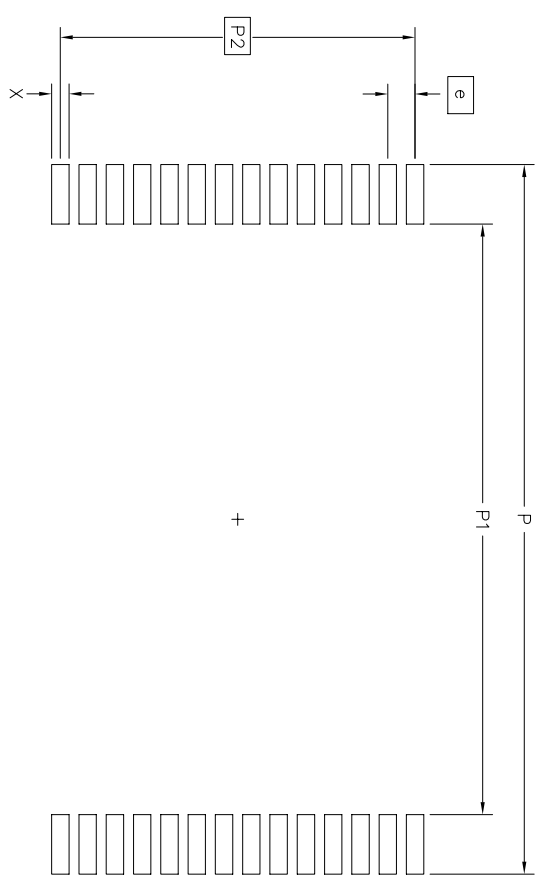

	MIN	MAX	MIN	MAX
P	14.20	14.40	P	14.20 14.40
P1	11.60	11.80	P1	11.60 11.80
P2	7.15 BSC	P2	7.50 BSC	
X	.30	.40	X	.30 .40
e	.55 BSC		e	.50 BSC
N	28		N	32

TOLERANCES UNLESS SPECIFIED			
DECIMAL	ANGULAR	6024 SILVERCREEK VALLEY RD SAN JOSE CA 95138 PHONE: (408) 284-8200 FAX: (408) 284-9591	
±	±	<a href="http://www.IDT.com">www.IDT.com</a>	
APPROVALS	DATE	TITLE PZ/PZG PACKAGE OUTLINE 8.0 X 13.4 X 1.0 mm TSOP TYPE I	
DRAWN		SIZE DRAWING No. PSC-4044	
CHECKED		REV 04	
DO NOT SCALE DRAWING		SHEET 2 OF 2	